


IG5 L Rack Series

IEC 61850-3/IEEE 1613 Industrial Managed 24-port Gigabit and 4-port 1G/10G SFP+ Ethernet Switch

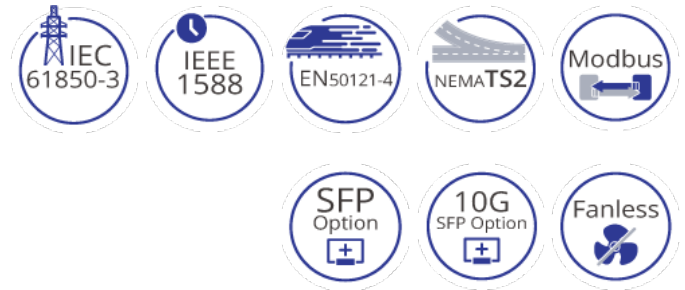

Highlights

+ High Bandwidth and Versatility

24 full gigabit ports for high bandwidth connections
 4 x 1G/10G SFP+ uplink ports for fiber connections
 128 Gbps Full duplex switching capacity
 Dual rate design at all ports, up to 10G
 Wide range of optical and electrical interface options

+ Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF
 Redundancy with VRRPv2
 Reduces amount of broadcast traffic

+ Designed for Industrial Environments

Operation temperature range from -10 to 60°C (14 to 140°F)
 Thermal shock and electrical noise resistance
 High electrostatic / surge protection capability

+ Time Stamped Supported

IEEE 1588v2
 - Available in all ports
 - Hardware-based time stamping
 - Operation as transparent clock

+ Flexible Rack Cabinet Installation

Dual LED panel design, support rear and front display
 Concise communication status display
 Considerable ease of cabling management

+ Support

Complimentary technical support
 Free firmware upgrades and notifications
 Limited lifetime warranty

Overview

EtherWAN's InfraGreEn IG5 L Rack series industrial managed switching platform that combines the advantages of Layer 3 routing protocols with robust management features and enhanced specifications. With support for static routing, Routing Information Protocol (RIP) v1/v2, OSPF and Virtual Router Redundancy Protocol (VRRP), these switches deliver outstanding flexibility and security in a high performance and cost-effective solution.

The IG5 L Rack series providing effective modularity through a wide range of port combination options. Supports full 28 ports gigabit transmission, and supports SFP+ to achieve 10G speed. Mountable on a 1U rack, equipped with EtherWAN's Alpha-Ring self-healing technology, providing less than 15ms fault recovery time making it ideal for applications intolerant to interruption, promote stronger communication networks.

This innovative device supports the IEEE 1588v2 standard, which defines the Precision Time Protocol (PTP), used to synchronize clocks throughout a packet-switched network. Wide range of Layer 2 features include port security, IGMP snooping, port-based VLAN, GARP, link aggregation and ACL, support variant security access method of SSH, SNMP, RMON, HTTPS and SFTP.

The rugged design can handle the vast majority of industrial application operations from -10°C to 60°C and is compliant with IEC61850 and IEEE 1613 standards, maintaining consistent performance in high EMI environments, making it ideal for mission-critical applications.

EtherWAN — **"When Connectivity is Crucial."**

Features

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware Upgrade
Configuration Backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) Synchronization
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3

+ Security

MAC Address Filtering
Enable/Disable Port
Storm Control
System Logging
IEEE 802.1x LAN Access Control
Remote Authentication through RADIUS and TACACS+
Complex Password Support
Multi-user Login and Privileged Access Management
SSH for CLI and Telnet Security
SSL and HTTPS for Web Security
ACL (Access Control List, up to 4096 Entries)

+ Quality of Service (QoS)

Priority Queues: 8 Queues Per Port
Traffic Classification Based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and Strict Mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for Port Speed and Duplex
Flow Control
IEEE 802.3x full duplex mode
Back-pressure half duplex mode

Redundant Protocols
IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery

VLANs
IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation
Static Trunk (4 groups)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing
Maximum number of routes in hardware: 64 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy
VRRPv2

+ Software Properties and Performance

Switching Fabric
128Gbps

Forwarding Rate
95.23Mpps

Max VLANs
256 (4096 VID)

Jumbo Frame Size
9KB

MAC Table Size
16K

Packet Buffer Memory
12M bits

Specifications

+ Interface

Ethernet

10/100/1000BASE-T(X): 0, 8, 16 or 24 ports

100/1000BASE SFP: 0, 8, 16 or 24 ports

1G/10G SFP+: 4 ports

Console

1 x RJ45

Digital Input

2 x Digital Input

Wet Contact: 0-3V for State 0; 13-30V for State 1;

Max input current: 8mA

Dry Contact: Logic Level 1–Close to GND; Logic Level 0–Open

Alarm Contact

2 x Relay output, current capacity

0.6A/30VDC

LED Indicators

Per Unit:

Power 1 (Single Power models) (Green)

Power 2 (Dual Power models) (Green)

Per Port: Link/Activity (Green)

Per Port: Alarm (Red)

+ Technology

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3ae 10Gigabit Ethernet

IEEE 802.3ad link aggregation control

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x full duplex and flow control

IEEE 802.1D STP

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1s MSTP

IEEE 802.1w RSTP

IEEE 802.1x PNAC

IEEE 802.1ab LLDP

Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

14,881,000pps for 10Gbps

Processing Type

Store-and-forward

Auto-negotiation
Half-duplex back-pressure and full-duplex flow control
Auto MDI/MDIX

System Memory
2Gb DDR3 SDRAM

Flash Storage
1Gb

+ Power

Input
Dual Power
FTRL: (Terminal Block)
24VDC to 48VDC (Nominal)
18 - 60VDC (Operational)
FWRL: (Terminal Block)
100 - 250VDC or 100 - 240VAC (Nominal)
88 - 300VDC or 88 - 264VAC (Operational)
RCRL: (AC Inlet)
100 - 240VAC

Single Power
FWSL: (Terminal Block)
100 - 250VDC or 100 - 240VAC (Nominal)
88 - 300VDC or 88 - 264VAC (Operational)
RCSL: (AC Inlet)
100 - 240VAC

Power Consumption
50W max.

Protection
Reverse Polarity Protection

+ Physical

Casing Material
Metal

IP Rating
IP40

Dimensions
442 x 325 x 44mm (W x D x H)
17.4" x 12.8" x 1.73"

Weight
4.6kg (10.14lbs) / 4.0kg (8.82lbs)

Installation Type
Rack mounting

+ Environmental

Operating Temp.
-10 to 60°C (14 to 140°F)

Storage Temp.
-45 to 85°C (-49 to 185°F)

Relative Humidity
5% to 95% (non-condensing)

MTBF
644,723 hours

+ Regulatory

ISO
Manufactured in ISO-9001 facility

EMI
FCC Part 15B Class A
VCCI Class A
EN 61000-6-4

EMS
EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic field)

Safety
UL 62368-1

Vibration
IEC 60068-2-6

Shock
IEC 60068-2-27

Free Fall
IEC 60068-2-31

Industrial
EN 50121-4

Power Substation
IEC 61850-3/IEEE 1613

+ Warranty

Length
Limited Lifetime

Details
www.etherwan.com/support/warranty-policy

+ What's Included

Device
Ethernet Switch


Cables
1 Console Cable

Installation
Mounting brackets, screws


Documentation
Quick Install Guide

Power
1 AC Power Cord (RCSL models)
2 AC Power Cord (RCRL models)

Dimensions

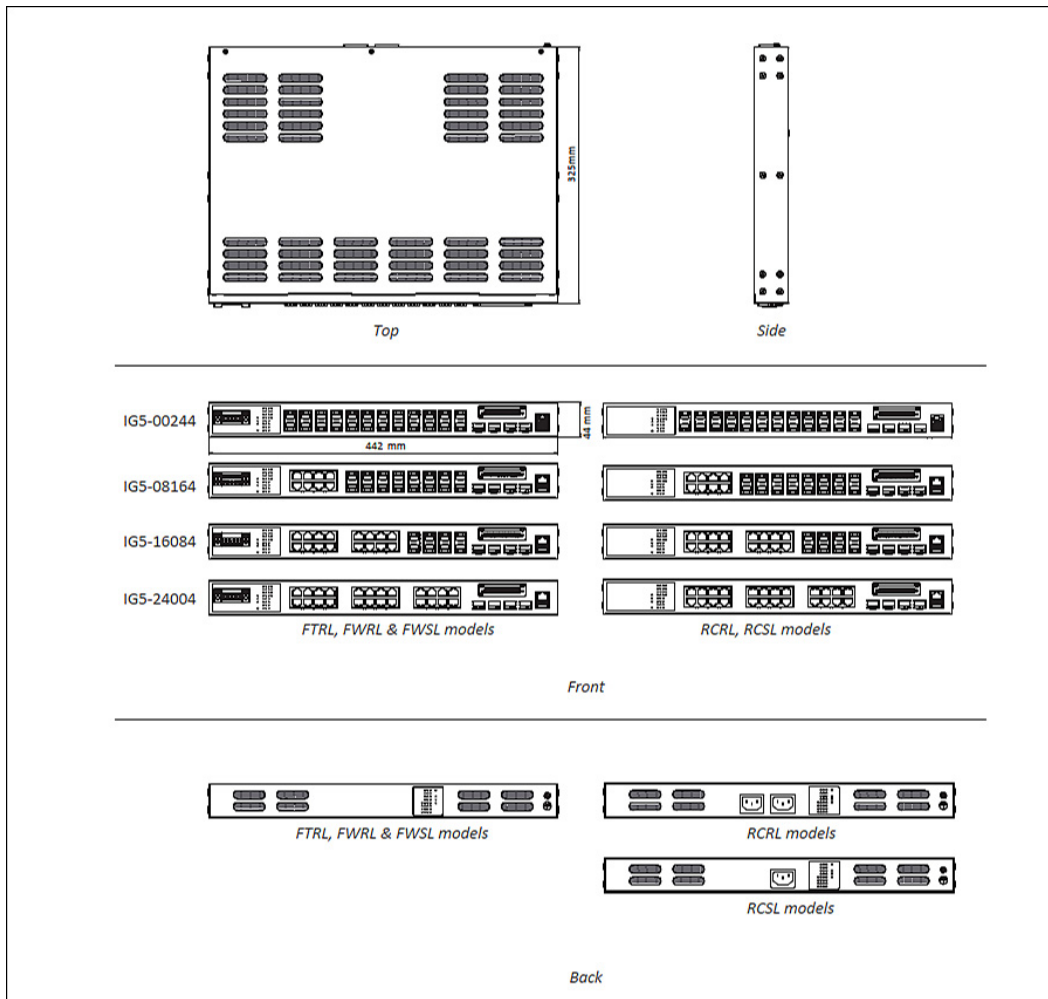

Application

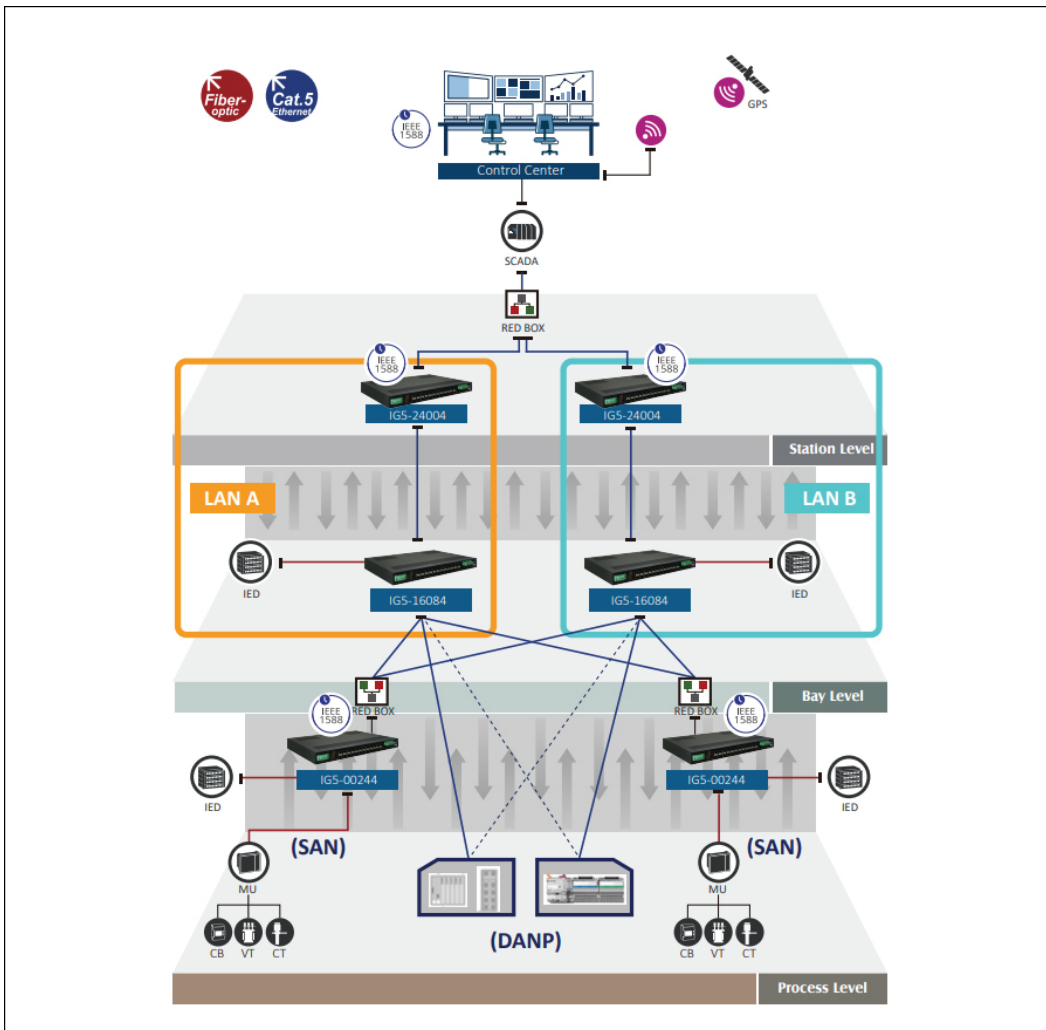

Software


[Network Management eVue™ Network Configuration and Monitoring Tool](#)
[Network Discovery eLite™ Network Discovery and IP Configuration Tool](#)



The screenshot shows the EtherWAN web interface. On the left, there is a 'Device List' table with columns for IP, System Name, and Group. The table contains 12 entries. On the right, there is a 'Topology' diagram showing a network of interconnected nodes. Below the device list, there is a 'Latest Events' section with a table of event logs.

| IP | System Name | Group |
|----------------|-------------|-------|
| 192.168.50.12 | EG99-5012 | |
| 192.168.50.62 | EX709-5062 | |
| 192.168.50.254 | R50 | |
| 192.168.50.11 | EG99-5011 | |
| 192.168.50.63 | EX74-5063 | |
| 192.168.50.14 | EX779-5014 | |
| 192.168.50.61 | EX71v2-5061 | |
| 192.168.50.44 | EX71-5044 | |
| 192.168.50.64 | EX73-5064 | |
| 192.168.50.34 | EX739-5034 | |

| Acknowledged | ID | Severity | Time | Service | Node | Message |
|--------------|------|----------|------------------------|--------------|--------------|------------------------------|
| ✓ | 5107 | Normal | 6/28/2019, 9:50:35 AM | login | server | User 'admin' logged in. |
| ✓ | 5106 | Normal | 6/27/2019, 10:00:50 AM | login | server | User 'admin' logged in. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Web 192.168.1.19 is down. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Telnet 192.168.1.19 is down. |
| ✓ | 5104 | Normal | 6/24/2019, 1:12:34 PM | login | server | User 'admin' logged in. |

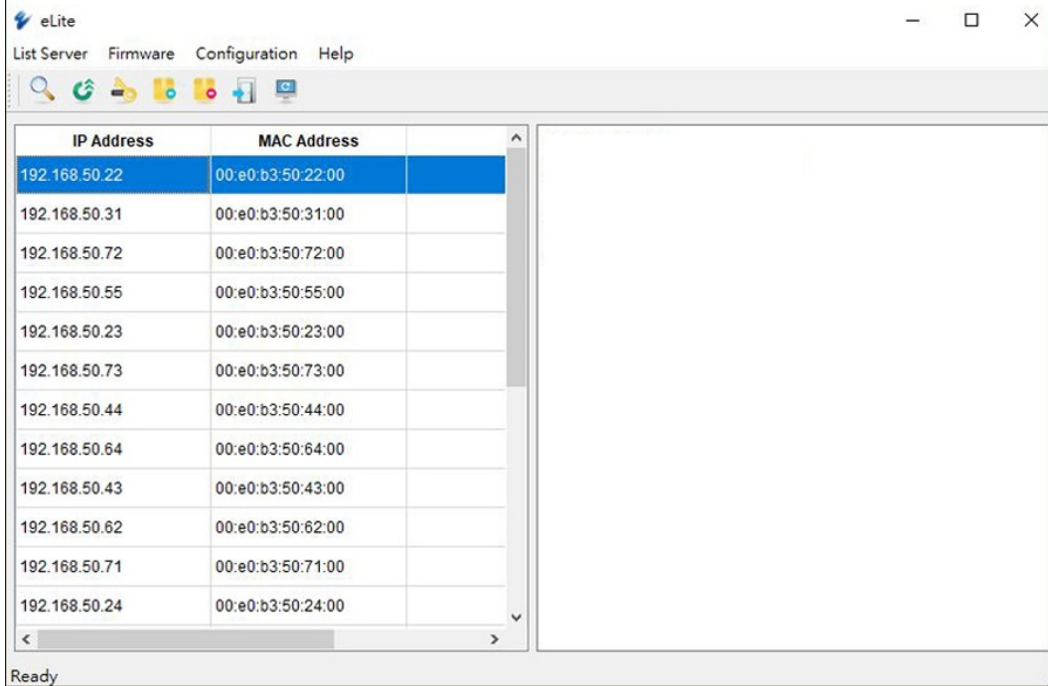

The screenshot shows the eLite application window. It has a menu bar with 'List Server', 'Firmware', 'Configuration', and 'Help'. Below the menu bar is a toolbar with several icons. The main area contains a table with two columns: 'IP Address' and 'MAC Address'. The table lists 14 IP addresses and their corresponding MAC addresses.

| IP Address | MAC Address |
|---------------|-------------------|
| 192.168.50.22 | 00:e0:b3:50:22:00 |
| 192.168.50.31 | 00:e0:b3:50:31:00 |
| 192.168.50.72 | 00:e0:b3:50:72:00 |
| 192.168.50.55 | 00:e0:b3:50:55:00 |
| 192.168.50.23 | 00:e0:b3:50:23:00 |
| 192.168.50.73 | 00:e0:b3:50:73:00 |
| 192.168.50.44 | 00:e0:b3:50:44:00 |
| 192.168.50.64 | 00:e0:b3:50:64:00 |
| 192.168.50.43 | 00:e0:b3:50:43:00 |
| 192.168.50.62 | 00:e0:b3:50:62:00 |
| 192.168.50.71 | 00:e0:b3:50:71:00 |
| 192.168.50.24 | 00:e0:b3:50:24:00 |

Ordering Info

+ Model

| | |
|---------------|---|
| IG5-24004YYYY | 24-port 10/100/1000BASE-T(X) + 4-port 1G/10G SFP+ Managed Ethernet Switch |
| IG5-16084YYYY | 16-port 10/100/1000BASE-T(X) + 8-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch |
| IG5-08164YYYY | 8-port 10/100/1000BASE-T(X) + 16-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch |
| IG5-00244YYYY | 24-port 100/1000BASE SFP + 4-port 1G/10G SFP+ Managed Ethernet Switch |

+ Power Input Interface (YYYY)

| | |
|------|--|
| FTRL | 24VDC to 48VDC Redundant (Terminal Block), Industrial Grade (-10 to 60°C) |
| FWRL | 88-300VDC or 100-240VAC Redundant (Terminal Block), Industrial Grade (-10 to 60°C) |
| RCRL | 100-240VAC Redundant (AC Inlet), Industrial Grade (-10 to 60°C) |
| FWSL | 88-300VDC or 100-240VAC (Terminal Block), Industrial Grade (-10 to 60°C) |
| RCSL | 100-240VAC (AC Inlet), Industrial Grade (-10 to 60°C) |

+ Accessories

| Part Number | Speed | Info | Mode | Distance | Operating Temperature | Wavelength | DDM |
|-------------------|----------|--------|-----------|-------------|-----------------------|------------|-----|
| EX-0155NSP-MB2L-A | 100Mbps | Multi | 2km | -40 to 85°C | 1310nm | - | |
| SFPMIS20M | 100Mbps | Single | 20km | -40 to 85°C | 1310nm | ✓ | |
| SFPGIM5AM | 1000Mbps | Multi | 275m/550m | -40 to 85°C | 850nm | ✓ | |
| SFPGIM02M | 1000Mbps | Multi | 2km | -40 to 85°C | 1310nm | ✓ | |
| SFPGIS10M | 1000Mbps | Single | 10km | -40 to 85°C | 1310nm | ✓ | |
| SFPTIM3AM | 10Gbps | Multi | 300m | -40 to 85°C | 850nm | ✓ | |
| SFPTIM3AM | 10Gbps | Single | 10km | -40 to 85°C | 1310nm | ✓ | |

+ For more SFP, please visit website:

| | |
|------------------------------|--|
| Hardened 100BASE SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| Hardened Gigabit SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| Hardened 10G SFP+ Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| DIN-Rail Power Supplies | www.etherwan.com/products/din-rail-power-supply |

