

EN400 シリーズ

PCI Express 100BASE-FX/SFP イーサネット アダプタ



特長

本商品につきましては2021年7月31日をもって販売を終了させて頂きました。代替製品については [こちらのページ](#) をご覧ください。

- » SFP slot and low-profile version availability
- » Supports PCI Express 1.1
- » Wake-on-LAN and remote wake-up support
- » Supports 1-Lane 2.5Gbps PCI Express Bus
- » 0 to 50°C operating temperature range

機能

- Compliant IEEE802.3 10BASE-T, 802.3u 100BASE-TX/FX/SFP
- Supports PCI Express 1.1
- Various Type of Cable Support - Twisted Pair Cable or Fiber Optic Cable
- Plug-and-Play Support
- Wake-on-LAN and remote wake-up support
- Full Duplex flow control (IEEE 802.3x)
- IEEE 802.1P Layer 2 Priority Encoding
- IEEE 802.1Q VLAN tagging
- Supports power down/link down power saving (for EN400TX)
- Supports 1-Lane 2.5Gbps PCI Express Bus
- 0 to 50°C operating temperature range

仕様

Technology

Standards

- IEEE802.3
- IEEE802.3u

Protocols

- IEEE802.3x Full-duplex flow control Driver
- Microsoft Windows 98, Windows ME, Windows XP, Windows 2000, Windows 2003, Windows Vista, Windows 7 and Windows 2008
- SCO Unix 5.0.6 and 5.0.7
- SCO OpenServer 6 and UnixWare 7.1.x.
- FreeBSD 7.x and 8.0
- Linux kernel 2.6.x and 2.4.x (Support x86 and x64)
- Novell server driver (Support OS 6.x, 5.x), client for DOS (ODI driver)
- MacOS 10.4 and 10.5 on Intel-based Mac computer, 10.6 on Intel-based Mac computer.

Power

Power Consumption

- 2W Max.

Mechanical

Dimensions:

* Low Profile

- 80mm (W) x 119.2mm (D)
(3.2"(W) x 4.76"(D))

* Regular

- 117.5 mm (W) x 119.2 mm (D)
(4.7"(W) x 4.76"(D))

Weight

- 80g (0.18lb.)
-

Interface

Ethernet Port

- 100BASE-FX: 1 port

LED Indicators

- Per Unit: Link/Activity, SPD
-

Environment

Operating Temperature

- 0°C to 50°C (32°F to 122°F)

Storage Temperature

- -10°C to 70°C (14°F to 158°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)
-

Regulatory Approvals


ISO

- Manufactured in an ISO9001 facility

EMI

- CE Mark Class B
 - FCC Part 15 Class B
 - VCCI Class B
-

寸法図

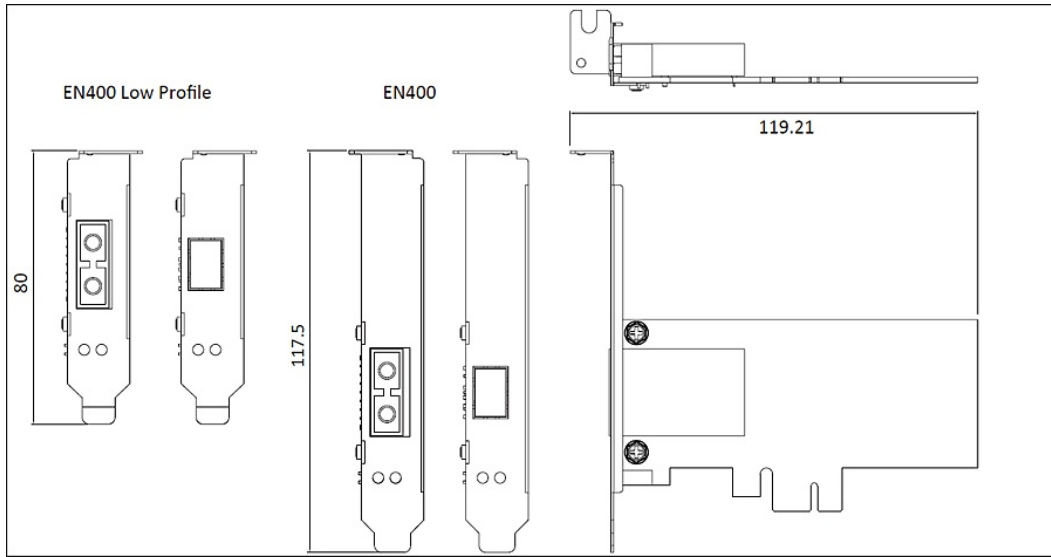

製品型番

Model

| | |
|-------------|--|
| EN400C | 100BASE-FX Multi Mode (SC) Ethernet Adapter |
| EN400T | 100BASE-FX Multi Mode (ST) Ethernet Adapter |
| EN400C-20 | 100BASE-FX Single Mode (SC) -20Km Ethernet Adapter |
| EN400C-40 | 100BASE-FX Single Mode (SC) -40Km Ethernet Adapter |
| EN400T-20 | 100BASE-FX Single Mode (ST) -20Km Ethernet Adapter |
| EN400CA-20 | 100BASE-FX Single Mode (SC) WDM-TX :1310nm/RX :1550nm -20Km Ethernet Adapter |
| EN400CB-20 | 100BASE-FX Single Mode (SC) WDM-TX :1550nm/RX :1310nm -20Km Ethernet Adapter |
| EN400CA-40 | 100BASE-FX Single Mode (SC) WDM-TX :1310nm/RX :1550nm -40Km Ethernet Adapter |
| EN400CB-40 | 100BASE-FX Single Mode (SC) WDM-TX :1550nm/RX :1310nm -40Km Ethernet Adapter |
| EN400LC | 100BASE-FX Multi Mode (LC) -2Km Ethernet Adapter |
| EN400PB | 100BASE-SX (SC) 850nm Multi-Mode Fiber Fast Ethernet Adapter |
| EN400SFP | 100BASE SFP Ethernet Adapter |
| EN400PC | 100BASE-FX Multi Mode (SC) Ethernet Adapter (Low profile) |
| EN400PC-10 | 100BASE-SX (SC) 1310nm Single-Mode Fiber Fast Ethernet Adapter (10km) |
| EN400PT | 100BASE-FX Multi Mode (ST) Ethernet Adapter (Low profile) |
| EN400PC-20 | 100BASE-FX Single Mode (SC) -20Km Ethernet Adapter (Low profile) |
| EN400PC-40 | 100BASE-FX Single Mode (SC) -40Km Ethernet Adapter (Low profile) |
| EN400PT-20 | 100BASE-FX Single Mode (ST) -20Km Ethernet Adapter (Low profile) |
| EN400PCA-20 | 100BASE-FX Single Mode (SC) WDM-TX :1310nm/RX :1550nm -20Km Ethernet Adapter (Low profile) |
| EN400PCB-20 | 100BASE-FX Single Mode (SC) WDM-TX :1550nm/RX :1310nm -20Km Ethernet Adapter (Low profile) |
| EN400PCA-40 | 100BASE-FX Single Mode (SC) WDM-TX :1310nm/RX :1550nm -40Km Ethernet Adapter (Low profile) |

| | |
|-------------|--|
| EN400PCB-40 | 100BASE-FX Single Mode (SC) WDM-TX :1550nm/RX :1310nm -40Km Ethernet Adapter (Low profile) |
| EN400PLC | 100BASE-FX Multi Mode (LC) -2Km Ethernet Adapter (Low profile) |
| EN400PSFP | 100BASE SFP Ethernet Adapter (Low profile) |

