

EX78900E シリーズ

広範囲動作温度対応産業用/管理型 8/12ポート 10/100/1000BASE-T(X) +2/4ポート 100/1000BASE SFP PoE ギガビット イーサネットスイッチ



特長

+ High Bandwidth and Versatility

8 or 12 10/100/1000BASE-T(X) ports for High bandwidth connections
 Up to 4 Dual-rate 1/10G SFP+ uplink ports for fiber connections
 Full capacity switching running at full duplex

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
 Fanless operation
 High impact, thermal shock, and electrical noise resistance

+ Lite Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF
 Redundancy with VRRP
 Reduces amount of broadcast traffic

+ PoE Features

IEEE 802.3bt with 60W; 240W Power budget
 PoE watchdog monitors status of connected PoE devices

+ Management/Security Features

Port control, SFTP
 802.1x port-based network access control and remote authentication through RADIUS and TACACS+
 Configure and monitor with eVue™ and eLite™

+ Support

Complimentary technical support
 Free firmware upgrades and notifications
 Limited lifetime warranty

概要

EtherWANのEX78900EシリーズはDINレールに取り付けられた産業用マネージドPoEイーサネットスイッチです。最大12ギガビットPoEポート、60 W電力およびIEEE 802.3.btプロトコルサポート、4つのデュアルレートギガビットSFPポートを備えたEX78900Eシリーズは、都市インフラ、交通、セキュリティなどのネットワークに柔軟性と信頼性を提供します。

EtherWAN — "When Connectivity is Crucial."

機能

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware upgrade
Configuration backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) synchronization
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3
Modbus TCP

+ Security

MAC Address filtering
Enable/Disable port
Storm control
System logging
IEEE 802.1x LAN Access control
Remote authentication through RADIUS and TACACS+
Complex password support
Multi-user login and privileged access management
SSH for CLI and Telnet security
SSL and HTTPS for web security
ACL (Access Control List, up to 4096 entries)

+ Quality of Service (QoS)

Priority Queues: 8 queues per port
Traffic classification based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex
Flow Control
IEEE 802.3x full duplex mode
Back-pressure half duplex mode

Redundant Protocols
IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery

VLANs
IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation
Static Trunk (4 groups)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing
Maximum number of routes in hardware: 64 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy
VRRP

+ Software Properties and Performance

Switching Fabric
32Gbps

Forwarding Rate
23.5Mpps

Max VLANs
256 (4096 VID)

Jumbo Frame Size
9KB

MAC Table Size
16K

Packet Buffer Memory
12M bits

仕様

+ Interface

Ethernet

8 or 12 x 10/100/1000BASE-T(X)

2 or 4 x 100/1000BASE SFP

Console

1 x RJ45

Config Backup

1 x USB (Type A Connector)

Digital Input

2 x Digital Input

Wet Contact: 0-3V for State 0; 13-30V for State 1;

Max Input Current: 8mA

Dry Contact: Logic Level 1–Close to GND; Logic Level 0–Open

Alarm Contact

2 x Relay output, current capacity 0.5A/48VDC

LED Indicators

Per Unit: Power 1, Power 2

Per Port: Link/Activity (Green)

Per PoE Port: PoE Status (Orange)

+ Technology

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3ad link aggregation control

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x full duplex and flow control

IEEE 802.1D STP

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1s MSTP

IEEE 802.1w RSTP

IEEE 802.1x PNAC

IEEE 802.1ab LLDP

IEEE 802.3az EEE

IEEE 802.3af/at/bt Power over Ethernet

IEEE 1588v2 PTP

Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

Processing Type

Store-and-forward

Auto-negotiation

Half-duplex back-pressure and full-duplex flow control

Auto MDI/MDIX

System Memory
2Gb DDR3 SDRAM

Flash Storage
1Gb

+ Power

Input

46-57VDC Redundant (Terminal block)**

** 46-57VDC for IEEE 802.3af type 1, ≤15.4W PD devices.

52-57VDC for IEEE 802.3at/bt type 2/3, 30W, 60W PD devices.

54-57VDC for IEEE 802.3bt, type 4, 90W PD devices

Power Consumption
20W Max (without PoE)

PoE Modes

802.3af/at Mode A: Pins 1/2(-), 3/6(+)

802.3bt (60W): Mode A & B, Pins 1/2(-), 3/6(+), 4/5(+), 7/8(-)

PoE Power Output

Ports 1-4, 9-12: Up to 30W/port

Ports 5-8: Up to 60W/port

Power Budget: 240W

Protection

Reverse Polarity Protection

+ Physical

Casing Material
Aluminum

IP Rating
IP30

Dimensions
72 x 140 x 170mm (W x D x H)
2.8" x 5.5" x 6.7"

Weight
1.5kg (3.3lbs)

Installation Type
DIN-rail mounting

+ Environmental

Operating Temp.
-40 to 75°C (-40 to 167°F)

Storage Temp.
-45 to 85°C (-49 to 185°F)

Relative Humidity
5% to 95% (non-condensing)

MTBF
1,108,382 hours

+ Regulatory

ISO
Manufactured in ISO-9001 facility

EMI
FCC Part 15B Class A
VCCI Class A
EN 61000-6-4
EN 61000-3-2
EN 61000-3-3

EMS
EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
PoE Ports: line to earth 6kV Surge
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic field)

Safety
UL 61010
NEMA TS2

Traffic
NEMA TS2

Vibration
IEC 60068-2-6

Shock
IEC 60068-2-27

Free Fall
FED STD 101C Method 5007.1

Industrial
EN 50121-4

+ Warranty

Length
Limited Lifetime

Details
www.etherwan.com/support/warranty-policy

+ What's Included


Device
Ethernet Switch

Cables
1 Console Cable


Installation
Mounting brackets, screws

Documentation
Quick Install Guide

寸法図

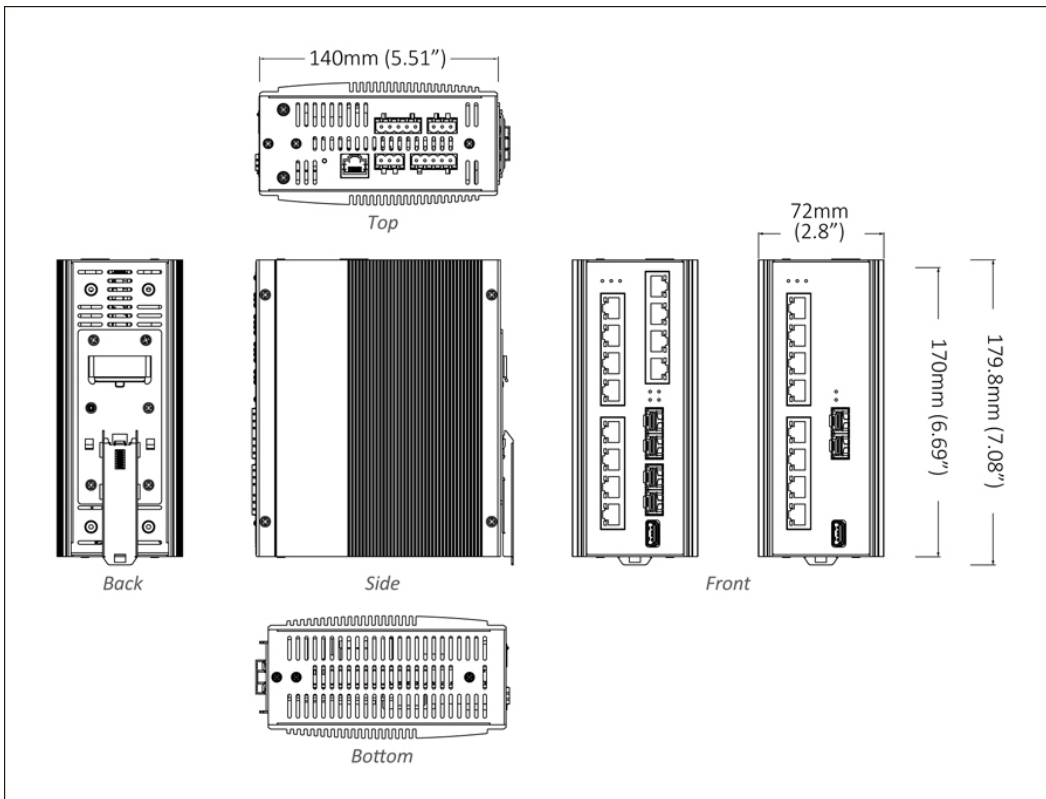


応用例

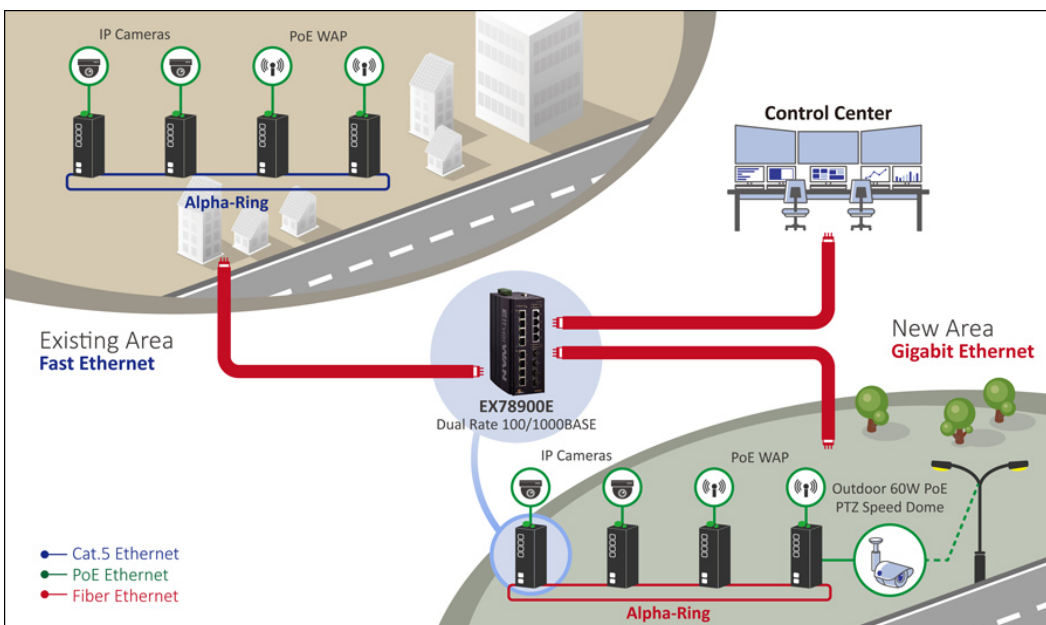

ソフトウェア


Network Management [eVue™ Network Configuration and Monitoring Tool](#)
 Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

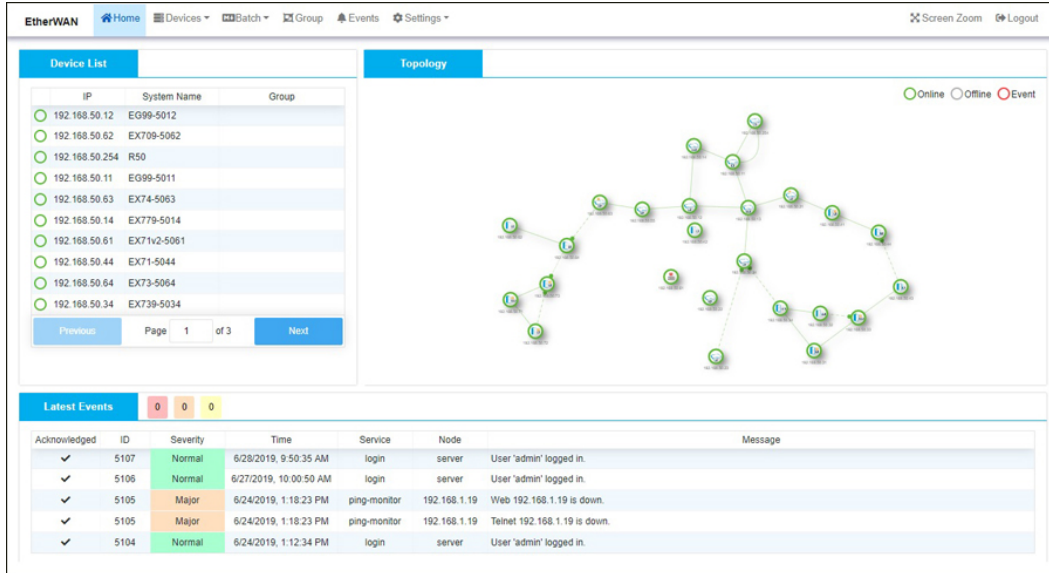

The screenshot shows the EtherWAN web interface. On the left, there is a 'Device List' table with columns for IP, System Name, and Group. On the right, there is a 'Topology' diagram showing a network of interconnected nodes. Below these, there is a 'Latest Events' section with a table of event logs.

| IP | System Name | Group |
|----------------|-------------|-------|
| 192.168.50.12 | EG99-5012 | |
| 192.168.50.62 | EX709-5062 | |
| 192.168.50.254 | R50 | |
| 192.168.50.11 | EG99-5011 | |
| 192.168.50.63 | EX74-5063 | |
| 192.168.50.14 | EX779-5014 | |
| 192.168.50.61 | EX71v2-5061 | |
| 192.168.50.44 | EX71-5044 | |
| 192.168.50.64 | EX73-5064 | |
| 192.168.50.34 | EX739-5034 | |

| Acknowledged | ID | Severity | Time | Service | Node | Message |
|--------------|------|----------|------------------------|--------------|--------------|------------------------------|
| ✓ | 5107 | Normal | 6/28/2019, 9:50:35 AM | login | server | User 'admin' logged in. |
| ✓ | 5106 | Normal | 6/27/2019, 10:00:50 AM | login | server | User 'admin' logged in. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Web 192.168.1.19 is down. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Telnet 192.168.1.19 is down. |
| ✓ | 5104 | Normal | 6/24/2019, 1:12:34 PM | login | server | User 'admin' logged in. |

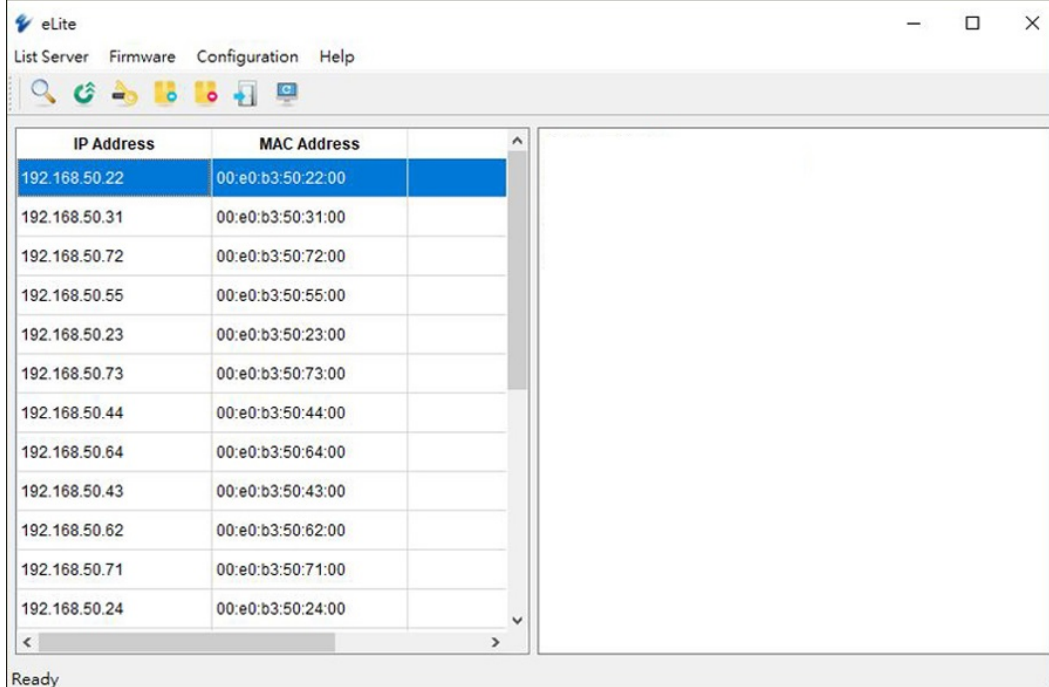

The screenshot shows the eLite application window. It has a menu bar with 'List Server', 'Firmware', 'Configuration', and 'Help'. Below the menu is a toolbar with various icons. The main area contains a table with columns for IP Address and MAC Address.

| IP Address | MAC Address |
|---------------|-------------------|
| 192.168.50.22 | 00:e0:b3:50:22:00 |
| 192.168.50.31 | 00:e0:b3:50:31:00 |
| 192.168.50.72 | 00:e0:b3:50:72:00 |
| 192.168.50.55 | 00:e0:b3:50:55:00 |
| 192.168.50.23 | 00:e0:b3:50:23:00 |
| 192.168.50.73 | 00:e0:b3:50:73:00 |
| 192.168.50.44 | 00:e0:b3:50:44:00 |
| 192.168.50.64 | 00:e0:b3:50:64:00 |
| 192.168.50.43 | 00:e0:b3:50:43:00 |
| 192.168.50.62 | 00:e0:b3:50:62:00 |
| 192.168.50.71 | 00:e0:b3:50:71:00 |
| 192.168.50.24 | 00:e0:b3:50:24:00 |

製品型番

+ Model

| | |
|--------------|--|
| EX78934E-0VB | 12-port 10/100/1000BASE-T(X) PoE + 4-port 100/1000BASE SFP |
| EX78924E-0VB | 8-port 10/100/1000BASE-T(X) PoE + 4-port 100/1000BASE SFP |
| EX78922E-0VB | 8-port 10/100/1000BASE-T(X) PoE + 2-port 100/1000BASE SFP |

+ Accessories

| | |
|------------------------------|--|
| Hardened 100BASE SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| Hardened Gigabit SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| DIN-Rail Power Supplies | www.etherwan.com/products/din-rail-power-supply (*) |
| *Recommended Power Supply | NDR-480-48 480W 48VDC DIN-Rail Power Supply |

