

## EX42000 Series

Industrial Unmanaged 4 to 5-port 10/100BASE-TX and 1-port 100BASE-FX Ethernet Switch



## Overview

EtherWAN's EX42000 Series is a compact industrial unmanaged Fast Ethernet switch, designed for easy deployment in harsh environments.

The EX42000 Series is equipped with 5 Fast Ethernet copper ports, or a combination of 4 Fast Ethernet copper ports and 1 Fast Ethernet fiber port for long distance connectivity. This switch features 10/100Mbps transfer speeds, full/half-duplex auto-negotiation, and auto MDI/MDIX operation, allowing for fast and hassle-free connection and setup.

Although unmanaged, the EX42000 is feature-rich with full wire speed Fast Ethernet throughput, QoS (Quality of Service), Broadcast storm protection, IEEE 802.3az EEE (Energy Efficient Ethernet), and 4 kV surge protection. The EX42000 can be DIN rail mounted, and its compact size makes it an ideal solution for factory floors, warehouses, and locations without climate control.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

### + Industrial Grade

Supports -10 to 60°C (14 to 140°F) operating temperature  
Supports DIN-Rail mounting

### + Fiber Connectivity

Up to one 100BASE-FX port with SC and ST options

### + 4kV Surge Protection on Data port

Augmented 4 kV surge protection in accordance with EN 61000-4-5

### + Broadcast Storm Protection Threshold

30 Frames / 10ms for 100Mbps

## Specifications

### + Technology

#### Standards

IEEE 802.3u 100BASE-TX/FX  
IEEE 802.3x full-duplex flow control  
IEEE 802.3az Energy Efficient Ethernet  
IEEE 802.1p Quality of Service (QoS)

#### Forward/Filtering Rate

14,880pps for 10Mbps  
148,810pps for 100Mbps

#### Packet Buffer Memory

448K bits

#### Processing Type

Store-and-Forward  
Auto Negotiation  
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control  
Auto MDI/MDIX

#### Address Table Size

1K MAC addresses

### + Power

#### Input

12-48VDC (Terminal Block)

#### Power Consumption

1.82W Max. 0.14A@12VDC, 0.07A@24VDC,  
0.038A@48VDC

#### Protection

Reverse Polarity Protection

### + Physical

#### Casing Material

Plastic Case

#### IP Rating

IP30

#### Dimensions

26 x 70 x 110mm (W x D x H) (1.02" x 2.76" x 4.33")

#### Weight

0.2Kg (0.44lbs.)

#### Installation Type

DIN-Rail (Top hat type 35mm)

### + Interface

#### Ethernet

10/100BASE-TX: 5 or 4 ports  
100BASE-FX: 0 or 1 port

#### LED Indicators

Per Unit: Power (Green)  
Per Port: Link/Activity (Green), Speed (Yellow)

### + Environmental

#### Operating Temp.

-10 to 60°C (14 to 140°F)

#### Storage Temp.

-40 to 85°C (-40 to 185°F)

#### Ambient Relative Humidity

5% to 95% (non-condensing)

### + Regulatory

#### ISO

Manufactured in ISO-9001 facility

#### EMI

FCC Part 15B Class A  
VCCI Class A  
EN 61000-6-4  
EN 61000-3-2  
EN 61000-3-3

#### EMS

EN 61000-6-2  
- EN 61000-4-2 (ESD)  
- EN 61000-4-3 (Radiated RFI)  
- EN 61000-4-4 (Burst)  
- EN 61000-4-5 (Surge)  
\* Signal ports: ±4kV line-to-ground  
- EN 61000-4-6 (Induced RFI)  
- EN 61000-4-8 (Magnetic field)


#### Safety

UL 62368

#### Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration)  
IEC 60068-2-27 Ea (Shock)  
FED STD 101C Method 5007.1 (Free fall w/package)

## Dimensions

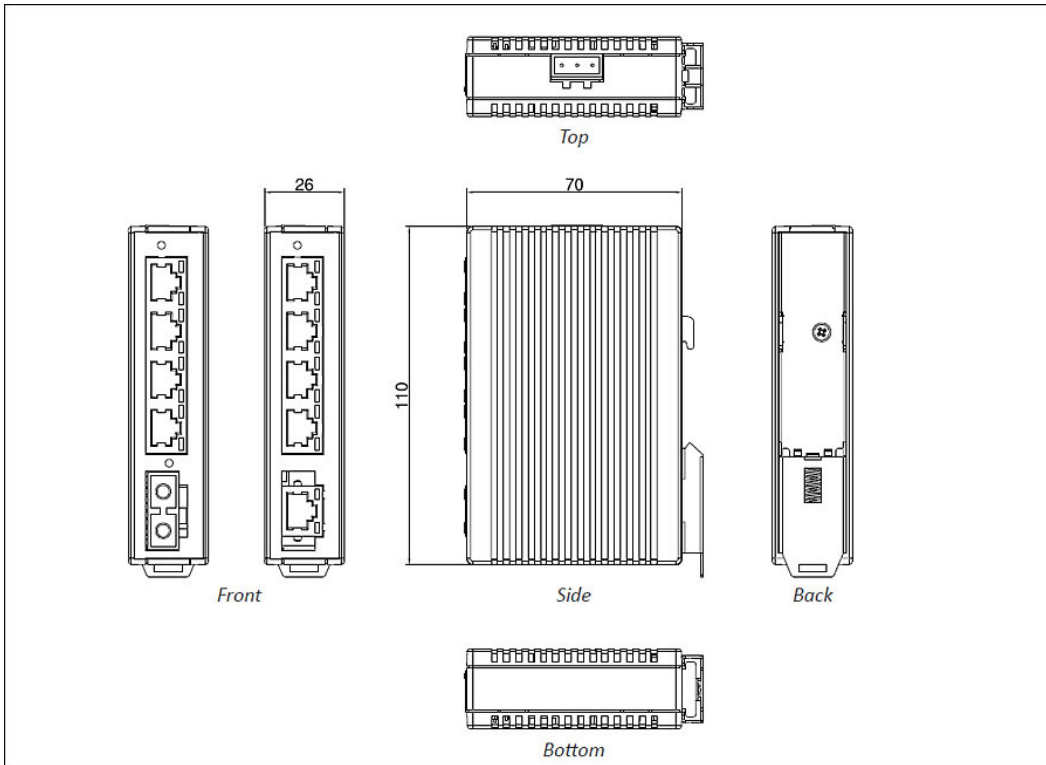

## Ordering Info

### Model

<b>EX42005-00-1-A</b>	5-port 10/100BASE-TX Industrial Unmanaged Ethernet Switch with 4kV surge protection
<b>EX42014-XY-1-A</b>	4-port 10/100BASE-TX +1-port 100BASE-FX Industrial Unmanaged Ethernet Switch with 4kV surge protection

\* DIN-Rail mounting kit included.

### 100FX Fiber Options (XY)

<b>1A</b>	Multi Mode (SC) - 2Km
<b>1B</b>	Multi Mode (ST) - 2Km
<b>2A</b>	Single Mode (SC) - 20Km
<b>2D</b>	Single Mode (ST) - 20Km
<b>2E</b>	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
<b>2G</b>	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km

\* More 100FX fiber options also available upon request.

### Optional Accessories

<b>HDR-30-24</b>	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
<b>HDR-60-24</b>	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
<b>EDR-75-24</b>	75W/3.2A DIN-Rail 24VDC Industrial Power Supply
<b>EX41-145046-X</b>	Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA

