

## EX17008

Web-smart 8-port 10/100BASE-TX PoE (IEEE 802.3at) Ethernet Switch



## Overview

**This product is discontinued as of 28th August 2020. [click here](#) for alternative product.**

EtherWAN's EX17008 provides an 8-port switching platform supporting IEEE802.3at Power over Ethernet, high performance switching with features required for enterprise environments.

The EX17008 is equipped with 8 10/100BASE-TX PoE ports. The EX17008 is feature-rich with full wire speed throughput, QoS support, making the EX17008 Series a powerful network switch.

The IEEE802.3at PoE ports provide up to 30W/port with a PoE power budget of 120W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements.

Users are able to access management features such as; IP configuration, QoS, VLANs, trunking and via web browser interfaces.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

### Power over Ethernet

- » Supports 8-port IEEE802.3at Power over Ethernet (PoE) and Power Sourcing Equipment (PSE)

### Web-Managed Interface

- » Comprehensive IP configuration, QoS, VLANs and trunking

# Specifications

## Technology

### Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3x, Full duplex and flow control
- IEEE 802.3af/at Power over Ethernet

### Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

### Packet Buffer Memory

- 1.625Mbits

### Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

### Address Table Size

- 4K MAC addresses
- 

## Power

### Input Voltage

- 100-240VAC, 50/60Hz

### Power Consumption

- Device: Max. 5.8W (without PoE)
- PoE power budget: 120W Max.

### PoE Technology

- Alternative A, Pins 1/2(+), 3/6(-)

### PoE Power Output

- IEEE 802.3at: up to 30W/port, 50-57VDC, 600mA Max.
- 

## Mechanical

### Casing

- Metal Case
- IP30

### Dimensions

- 266 x 160 x 44mm (W x D x H)  
(10.47" x 6.30" x 1.73")

### Weight

- 1.4Kg (3.08lbs.)

### Installation

- Desktop, Rack Mounting
- 

## Interface

### Ethernet Port

- 10/100BASE-TX: 8 PoE ports

### LED Indicators

- Per Unit: Power Status
  - Per Port: Link/Activity
  - Per port PoE: Act/status
- 

## Environment

### Operating Temperature

- 0 to 45°C (32 to 113°F)

### Storage Temperature

- -10 to 70°C (14 to 158°F)

### Ambient Relative Humidity

- 10% to 95% (non-condensing)
- 

## Regulatory Approvals

### ISO

- Manufactured in an ISO 9001 facility

## Safety

UL 60950


## Emission Compliance

FCC Part 15 Class A

CE mark Class A

---

## Dimensions

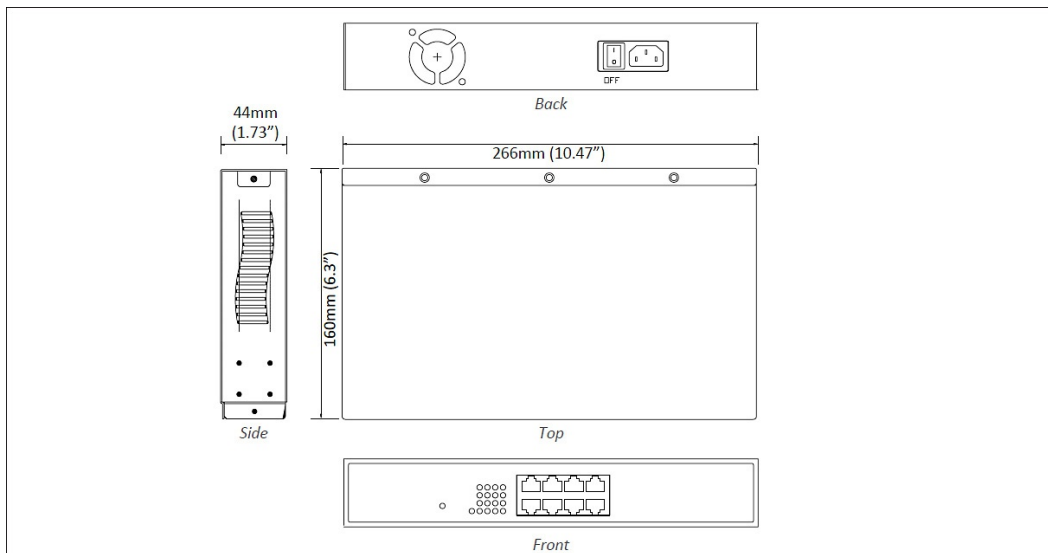


## Ordering Info

### Model

<b>EX17008</b>	8-port 10/100BASE-TX PoE (IEEE802.3at) Web-smart Ethernet Switch
----------------	--

---

### Optional Accessories

<b>KR-BK17</b>		Rack mounting kit (black)
----------------	---	---------------------------

---



© EtherWAN Systems, Inc. All rights reserved. 20210413

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.