


AiR GUARD

Industrial IoT Cellular Smart Security Gateway

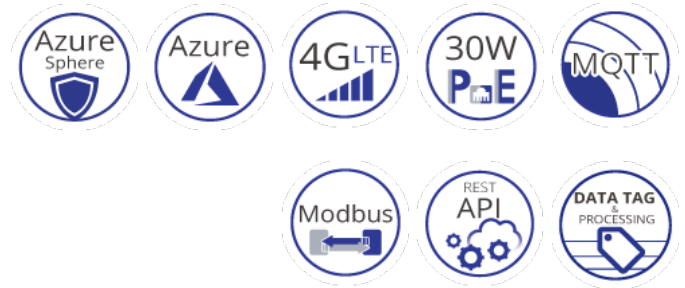

Overview

Over the past few years, the Internet of Things (IoT) has captured headlines across the world. With its network of "Smart," sensor-enabled devices that can communicate and coordinate with one another via the Internet, the IoT can facilitate computer-mediated strategies for managing city resources, energy management, and numerous other tasks. However, the way forward for IoT may be complicated. As with any technology in its early stages, cybersecurity concerns will be prevalent. There have already been instances of hackers wreaking havoc by infiltrating connected IoT devices.

In light of the essential need for security, EtherWAN's AiR GUARD is an advanced IIoT cellular gateway and 4G LTE PoE device specifically optimized for secure IoT data transmission, running with Microsoft's Azure Sphere. Offering not only secure connectivity, it also provides industrial protocols and easy to use data pre-processing and conversion for efficient and low-cost edge to cloud connectivity. AiR GUARD is your IoT guardian.

EtherWAN — "When Connectivity is Crucial."

Spotlight

+ Built-in Microsoft security technology

AiR GUARD's built-in Azure Sphere chip provides secure connectivity based on a hardware root of trust, and its OS adds layers of protection with continuous updates to ensure a trustworthy platform.

+ Highly-reliable network connection

Offers multiple internet access methods: 10/100 BASE-T(X) & Gigabit Ethernet; Global 3G/4G LTE Cat.4 networks

+ Convenient 30W PoE to power connected devices

Offers one port of 10/100/1000 BASE PoE IEEE802.3at Power over Ethernet

+ Data processing and conversion ability

Built-in Data Tag Engine
Easy integration of equipment data into middleware with secured data conversion to optimize efficiency with connected equipment

+ Automatic OTA firmware upgrade

The ability to add new software features to a product after a device has been deployed in the field to improve functionality over time
The opportunity to rapidly respond to bugs and security updates

+ Supports RESTful API

Easy to acquire data or remote configure settings

Azure Sphere

+ Azure Sphere certified microcontroller

Azure Sphere MT3620

+ Hardware-based root of trust

Prevents device forgery or spoofing

+ Defense in depth

Multiple layers of security - each layer of software (Azure Sphere OS) verifies that the layer above it is secured

+ Certificate-based authentication

Signed certificates validated by cryptographic Key

+ Renewable security

Device software is automatically updated to correct known vulnerabilities or security breaches

+ IIoT Connectivity with Azure Sphere Security Service

Microsoft secures the Firmware with timely updates for 10 years

Protects your devices and your customers with certificate-based authentication of all devices and communication

Detects emerging security threats through automated processing of on-device errors

Frequency Bands

+ Frequency Bands Region Code Optional

| Sku Code | 4G LTE | | 3G | 2G | Region |
|----------|---|--|--------------------------------|--------------------------------|----------------------------------|
| | FDD LTE | TDD LTE | WCDMA | GSM/EDGE | |
| TA | B1(2100)/3(1800)/4(AWS)/5(850)/7(2600)/8(900)/28(700 APT) | B40(2300) | B1(2100)/2(1900)/5(850)/8(900) | B2(1900)/3(1800)/5(850)/8(900) | Taiwan & Australia |
| EA | B1(2100)/3(1800)/5(850)/7(2600)/8(900)/20(800) | B38(TD 2600)/40(TDV 2300)/ 41(TD 2500) | B1(2100) / 5(850)/ 8(900) | B3(1800)/8(900) | EU & APAC*/ Singapore / Thailand |

Specifications

+ Cellular

Standards

4G LTE: FDD-LTE, TDD-LTE, Transfer rate (max):

- LTE FDD: 150Mbps down; 50Mbps up
- LTE TDD: 130Mbps down; 35Mbps up

3G: WCDMA, Transfer rate (max): 42Mbps down; 5.76Mbps up

2G: GSM/EDGE, Edge Transfer rate (max): 236.8Kbps down & up

SIM Slot

1 x nano SIM card slot

Antenna connector

2 x SMA Female

+ Ethernet

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE802.3at Power over Ethernet

Ports

1 x 10/100/1000 PoE 802.3at PSE + 1x

100/1000 BASE-T(X) + 1 x 10/100BASE-T(X)

+ Serial

Ports

2 x RS485

+ I/O

DI/DO

1 x Digital In ("Logic 0": 0-2V, "Logic 1": 5-30V)

1 x Digital Out (Relay Mode, up to 30V/1A)

+ Micro SD**Capacity**

Max. Storage of 64GB

+ LED Indicators**System**

Power , System status, LTE status , AZS (Azure Sphere) , COM 1, COM 2

+ Power**Input**

12-24VDC

Power consumption

18 Watts (without PoE active)

+ Physical**Casing Material**

Metal case

IP Rating

IP30

Dimensions

138 x 110 x 45mm (HxDxW)

Weight

0.7Kg

Installation Type

DIN-Rail mounting

+ Environment Limits**Operating Temp.**

-40 to 75°C (-40 to 167°F)

Storage Temp.

-40 to 85°C (-40 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

+ Regulatory Approvals

Safety

EN IEC 62368-1:2020+A11:2020

Emissions/Immunity

EU: CE

UK: UKCA

US: FCC part 15B

Taiwan: NCC

Singapore: IMDA

Thailand: NBTC

Australia: RCM

Features

+ Functions

Cellular

3GPP, 3G/4G

Ether-WAN

Dynamic IP, Static IP, PPPoE

Protocols

DHCP Server, LLDP

Port Forwarding

NAT, Virtual Server/Computer

+ Network Management

Configuration

Web Console, SSH, HTTPS

System

Firmware upgrade, configuration backup & restore, reboot & reset default

Diagnostic

Ping, Traceroute

+ Security

VPN

OpenVPN:

- Server / Client

+ Field Communication

Modbus

Modbus TCP, Modbus RTU Master

Data Interchange

MQTT Client

RESTful API

Easy to acquire data or remote configure settings

Data Tag Engine


Front-end device raw data to convert to be logical data by Tag based and specified Tag data format combination to the cloud.

+ Service


OTA F/W upgrade automatically

Use Cellular or Ethernet WAN to update new version system firmware and Azure Sphere Security

Application

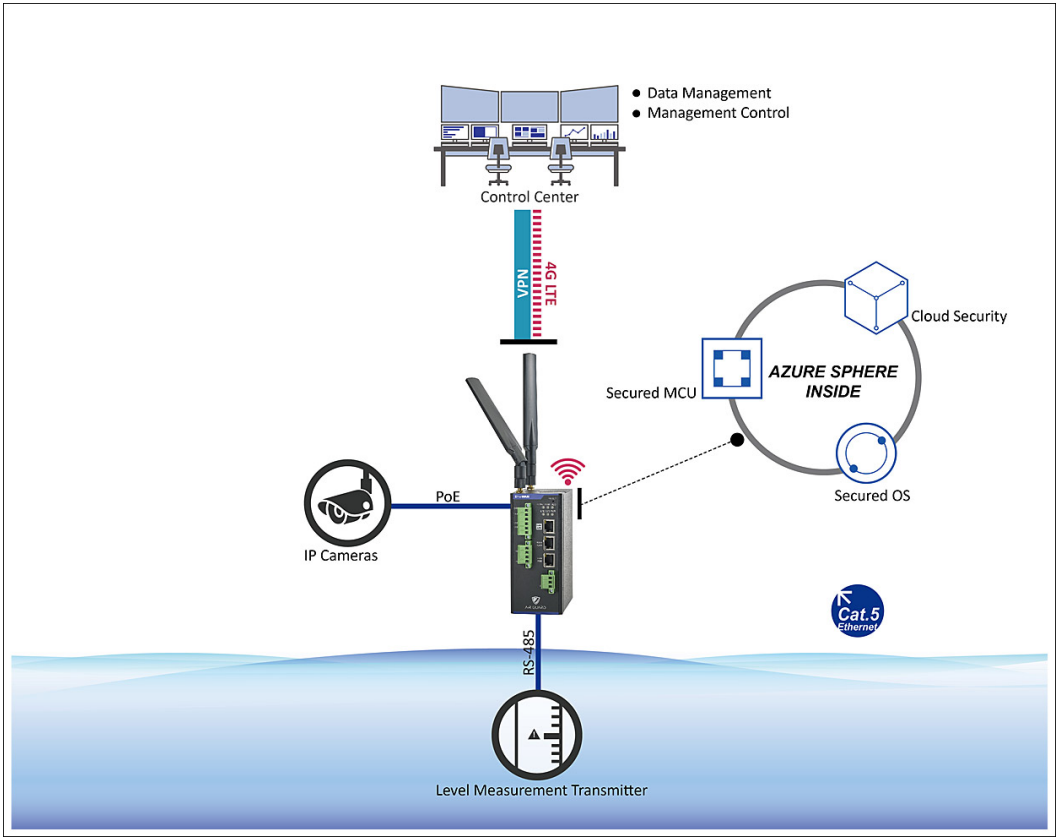

Dimensions

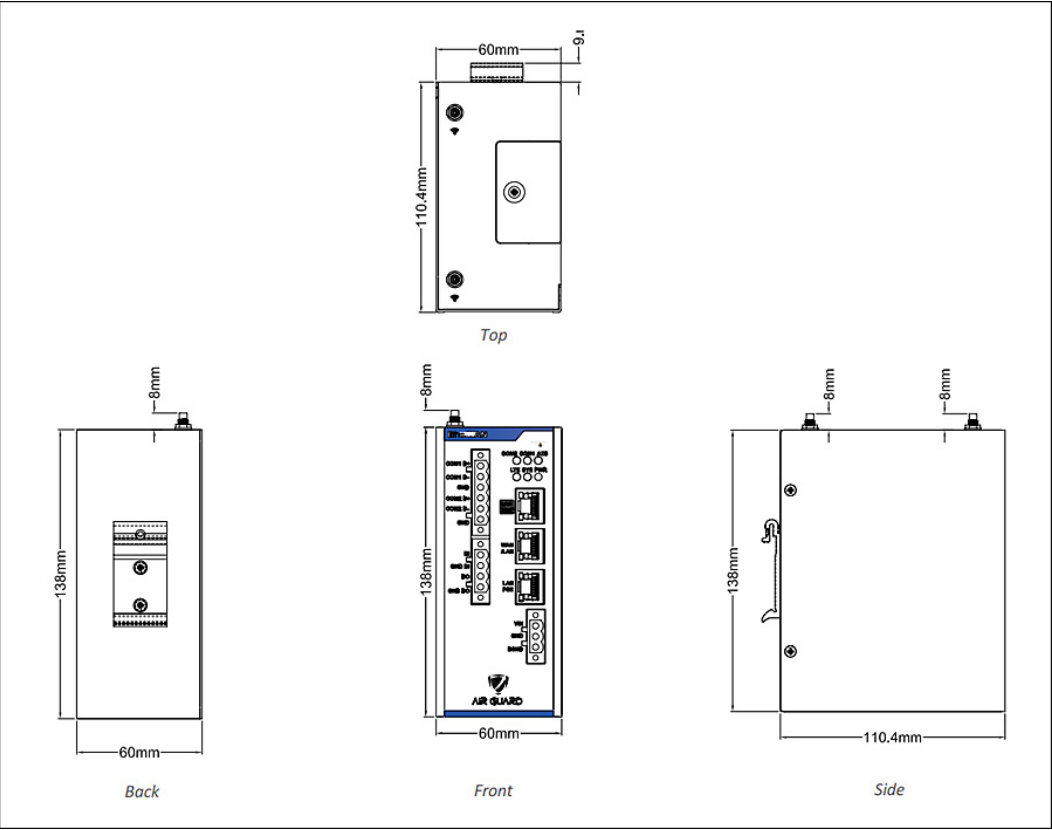

Ordering Info

+ 4G LTE Gateway

| Model | Description | RF | Region |
|--------------|--|--------------|-----------------------------------|
| AiR GUARD-TA | Industrial IoT Cellular Smart Security Gateway | 4G LTE Cat.4 | Taiwan & Australia |
| AiR GUARD-EA | Industrial IoT Cellular Smart Security Gateway | 4G LTE Cat.4 | EU & APAC* / Singapore / Thailand |

