


EG97023 Series test2

12-port 10 Gigabit and 8-port Gigabit Hardened Managed Layer 3 Switch

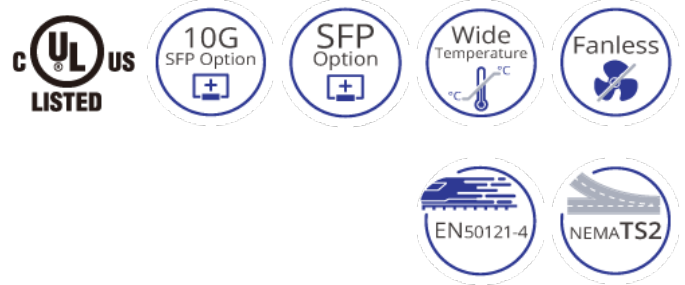

Overview

[When should you use an Industrial Layer 3 switch?](#)

EtherWAN's EG97023 is a hardened layer 3 core/distribution switch, designed to support high bandwidth routing in harsh environments. Equipped with 12 ports capable of up to 10-gigabit speed each and 8 additional gigabit ports, along with a full capacity switching bandwidth, the EG97023 provides the optimal solution for connecting multiple networks. In addition to layer 3 benefits such as improved fault isolation, simplified security management, network traffic segregation, lower network latency, and simplified troubleshooting, the EG97023 is hardened and fan-less, designed to last and operate through the harshest environments. Backed by a limited lifetime warranty, the EG97023 provides flexibility, ultra-fast speeds, and reliability to support networks in urban infrastructure, transportation, security and other areas where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

Highlights

+ High Density, High Bandwidth Fiber Solution

Multiple ports with ultra-fast 10-gigabit speeds running at full capacity
12 dual-rate 10-gigabit SFP+ ports for fiber connections into the core/hub
8 dual-rate gigabit SFP ports for fiber connections to the nodes/edge

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
Fan-less operation
Thermal shock and electrical noise resistance

+ Full Layer 3 Functionality

Optimized routing at hardware level
Improved fault isolation
Layer 3 capability connects networks together

+ Compliant Products

NEMA TS2 rated
UL certified for safety
TAA/NDAA compliant for government projects

+ Management/Security Features

Port Security, Authentication, and Access Control
Storm Detection, IP ACL, and System Logging
Configure and monitor with eVue™

+ Lifetime Warranty

Complimentary Technical Support
Free Firmware Upgrades

Features

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware upgrade
Configuration backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) synchronization
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3

+ Security

MAC Address filtering
Enable/Disable port
Storm control
System logging
Remote authentication through RADIUS and TACACS+
Complex password support
Multi-user login and privileged access management
SSH for CLI and Telnet security
SSL and HTTPS for web security
ACL (Access Control List, up to 4096 entries)

+ Quality of Service (QoS)

Priority Queues: 8 queues per port
Traffic classification based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex
Flow Control
IEEE 802.3x full duplex mode
Back-pressure half duplex mode

Redundant Protocols
IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP

VLANs
IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation
Static Trunk
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features IPv4

Unicast Routing
Static Routing (1K)
RIP v1/v2
OSPF v2

Multicast Routing
PIM-DM
PIM-SM

Routing Redundancy
VRRP

+ Layer 3 Features IPv6

IPv6 Unicast Routing
RIPng
OSPF v3

IPv6 Multicast Routing
PIM6-DM
PIM6-SM

IPv6 Routing Redundancy
VRRP v3

+ Software Properties and Performance

Switching Fabric
256Gbps

Forwarding Rate
190.4Mpps

Total VLAN Entries

256 (4096 VID)

Jumbo Frame Size

12KB

MAC Table Size

24K

Packet Buffer Memory

32M bits

L2 Routes

Up to 24,000 unicast and 1,000 multicast routes

L3 IPv4 Routes

Up to 8,000 unicast and 8,000 multicast routes

L3 IPv6 routes

Up to 2,000 unicast routes

Specifications

+ Interface

Ethernet

8 x 100/1000 BASE-SFP

12 x 1G/10G SFP+

Console

1 x RJ45, 1 x USB

Config Backup

1 x USB (Type A Connector)

Alarm Contact

Relay output, current capacity

0.6A/30VDC

LED Indicators

Per Unit: Power 1, Power 2, Alarm

Per Port: Link/Activity

+ Technology

Standards

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3ad link aggregation control

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3ae 10Gbit/s Ethernet over fiber for LAN

IEEE 802.3an 10GBASE-T Ethernet over copper

twisted pair cable

IEEE 802.3x full duplex and flow control

IEEE 802.1D STP

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1s MSTP

IEEE 802.1w RSTP

IEEE 802.1x PNAC

IEEE 802.1ab LLDP

Forward/Filtering Rate

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

14,881,000pps for 10Gbps

Processing Type

Store-and-forward

Auto-negotiation

Half-duplex back-pressure and full duplex flow control

Auto MDI/MDIX

System Memory

4Gb DDR3 SDRAM

Flash Storage

2GB

+ Power

Input
VWR: 100-240VAC Redundant (Terminal block)
VCR: 100-240VAC Redundant (AC Inlet)

Power Consumption
75W Max

+ Physical

Casing Material
Metal

Dimensions
442 x 325 x 44mm (W x D x H)
17.4" x 12.8" x 1.73"

Weight
6.2kg (13.7lbs)

Installation Type
Rack mounting

+ Environmental

Operating Temp.
-40 to 75°C (-40 to 167°F)

Storage Temp.
-45 to 85°C (-49 to 185°F)

Relative Humidity
5% to 95% (non-condensing)

MTBF
585224 Hours at 25°C

+ Regulatory

ISO
Manufactured in ISO-9001 facility

EMC
EN 55032

EMI
FCC Part 15B Class A
VCCI Class A
EN 61000-6-4

EMS
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic field)

Safety
UL 62368-1

Traffic
NEMA TS2

Rail
EN 50121-4

Vibration
IEC 60068-2-6

Shock
IEC 60068-2-27

Free Fall
FED STD 101C Method 5007.1

+ Warranty

Length
Limited Lifetime

Details
www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet Switch

Cables

1 Console Cable

Power

2 AC Power Cord


Installation

Mounting Brackets, Screws


Documentation

Quick Install Guide

Dimensions

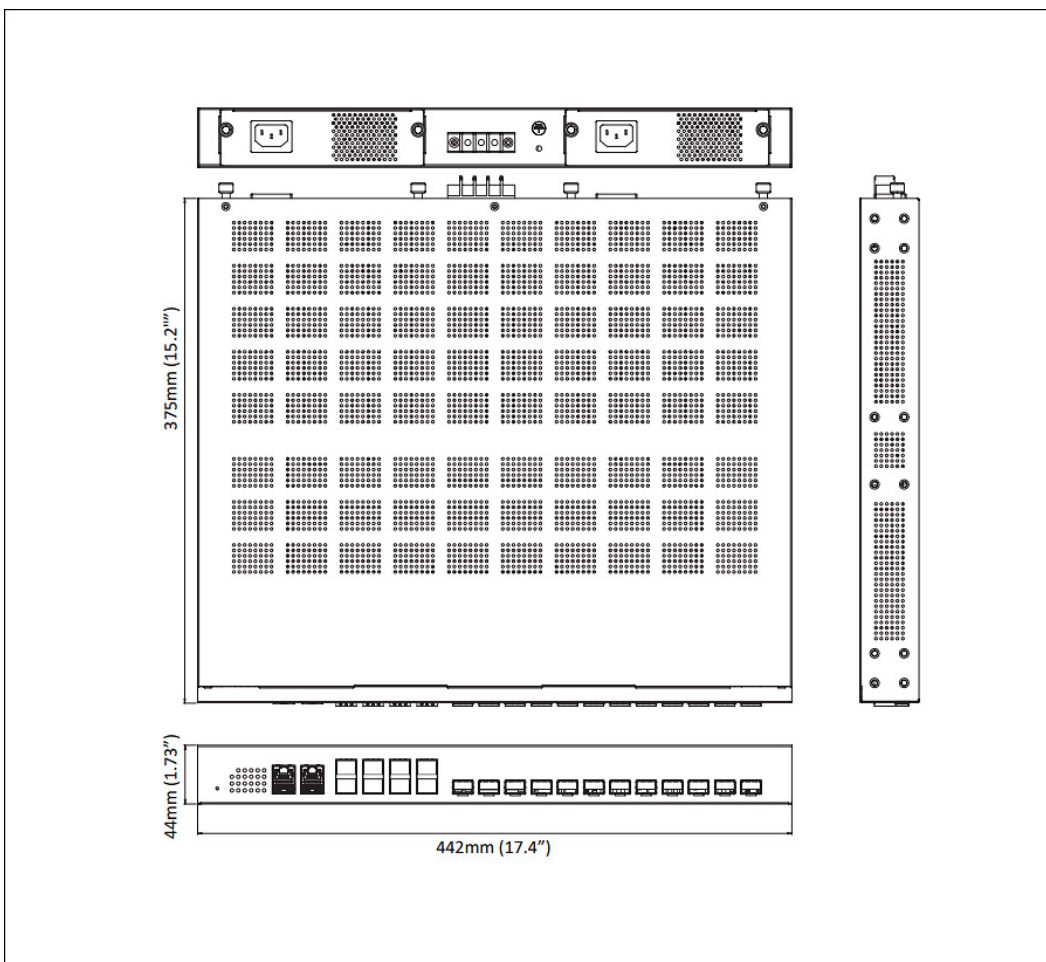

Application

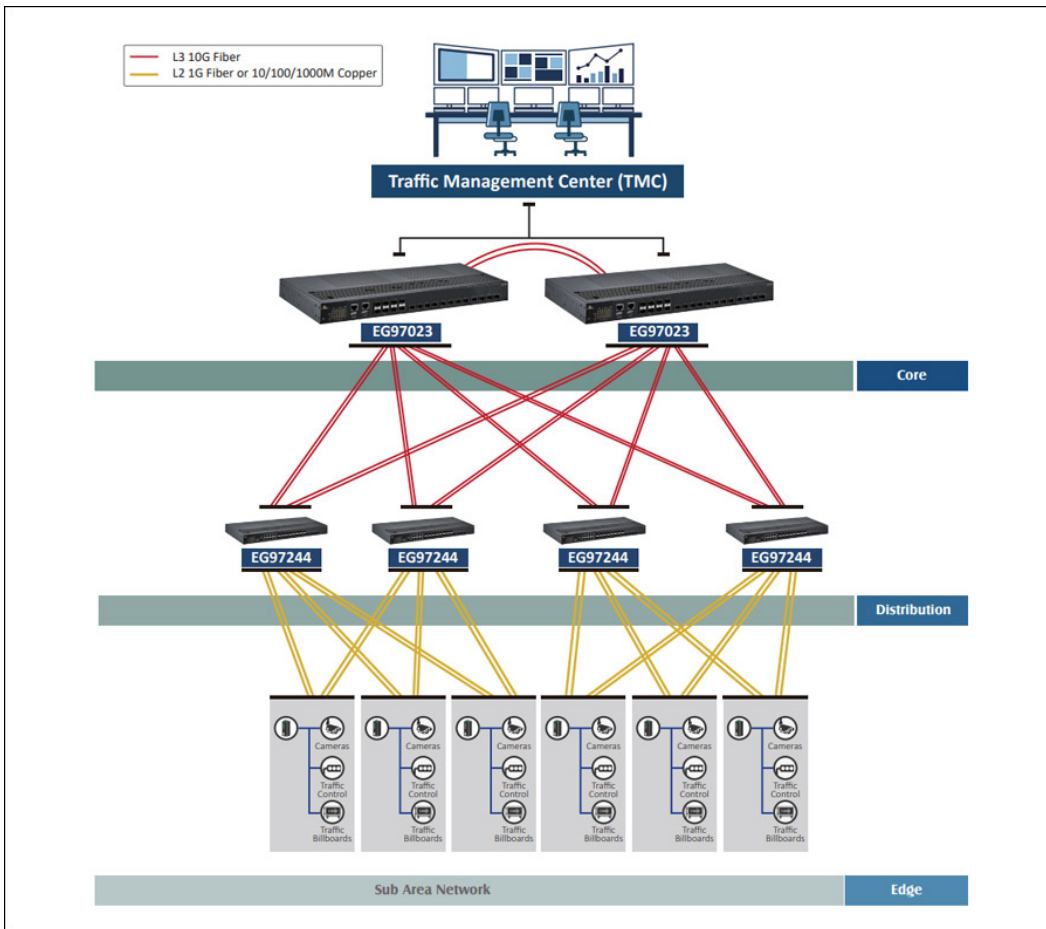

Software

Network Management [eVue™ Network Configuration and Monitoring Tool](#)
Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

EtherWAN eVue type unknown

EtherWAN eLite

Ordering Info

+ Model

EG97023-2VZ 8-port 100/1000BASE SFP + 12-port 1/10G SFP+ Hardened Managed Layer 3 Ethernet Switch

+ Power Input Interface (Z)

WR 100-240VAC Redundant (Terminal Block)

CR 100-240VAC Redundant (AC Inlet)

+ Accessories

Hardened SFP Modules www.etherwan.com/products/sfp-fiber-transceiver

Power Modules Spare Power Module for EG97023 series, 100-240VAC PSU (85W), AC Inlet

