

EX33000 Series

Industrial Unmanaged 14 to 16-port 10/100BASE-TX and 2-port 100BASE-FX Ethernet Switch



Overview

EtherWAN's EX33000 Series is an industrial unmanaged Fast Ethernet switching platform, designed for easy deployment in harsh environments.

The EX33000 Series is equipped with sixteen Fast Ethernet ports, or a combination of Fast Ethernet copper ports and two 100FX ports for long distance connectivity. Although unmanaged, the EX33000 is feature rich with full wire speed Fast Ethernet throughput, making the EX33000 Series a powerful network switch.

EtherWAN — "When Connectivity is Crucial."

Spotlight

+ Industrial Grade

Supports -10°C to 60°C (14°F to 140°F) operating temperature

+ Versatile mounting Options

Supports DIN-Rail, panel and rack mounting

+ Fiber Connectivity

Up to two 100BASE-FX ports with SC, ST and WDM options

Specifications

+ Technology

Standards
IEEE 802.3, 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3x Full duplex and flow control

Forward/Filtering Rate
14,880pps for 10Mbps
148,810pps for 100Mbps

Packet Buffer Memory
1.625M bits

Processing Type
Store-and-Forward
Auto Negotiation
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto MDI/MDIX

Address Table Size
4096 MAC addresses

Latency
Less than 10 μ s

+ Power

Input
Redundant power inputs:
12 to 48VDC (Terminal Block),
12VDC (DC Jack)

Power Consumption
7.4W Max. 0.6A@12VDC, 0.3A@24VDC,
0.15A@48VDC

+ Mechanical

Casing
Aluminum Case

IP Rating
IP30

Dimensions
69 x 110 x 135mm (W x D x H) (2.72" x 4.33" x 5.31")

Weight
0.87Kg (1.92lbs.)

Installation
DIN-Rail (Top hat type 35mm), Panel, or Rack mounting

+ Interface

Ethernet Ports
10/100BASE-TX: 16, 15 or 14 ports
100BASE-FX: 0, 1 or 2 ports

LED Indicators
Per Unit: Power 1 (Green), Power 2 (Green), Power 3 (Green)
Per Port: Link/Act

Alarm Contact
One relay output with current 1A@24VDC

+ Environment

Operating Temperature
-10 to 60°C (14 to 140°F)
Tested @ -20 to 70°C (-4 to 158°F)

Storage Temperature
-40 to 85°C (-40 to 185°F)

Ambient Relative Humidity
5% to 95% (non-condensing)

+ Regulatory Approvals

ISO
Manufactured in ISO-9001 facility


EMI
FCC Part 15B Class A
VCCI Class A
EN 61000-6-4
EN 55022
EN 61000-3-2
EN 61000-3-3

EMS
EN 61000-6-2
- EN 61000-4-2 (ESD)
- EN 61000-4-3 (Radiated RFI)
- EN 61000-4-4 (Burst)
- EN 61000-4-5 (Surge)
- EN 61000-4-6 (Induced RFI)
- EN 61000-4-8 (Magnetic field)

Safety
UL 508

Environmental Test Compliance
IEC 60068-2-6 Fc (Vibration)
IEC 60068-2-27 Ea (Shock)
FED STD 101C Method 5007.1 (Free fall w/package)

Dimensions

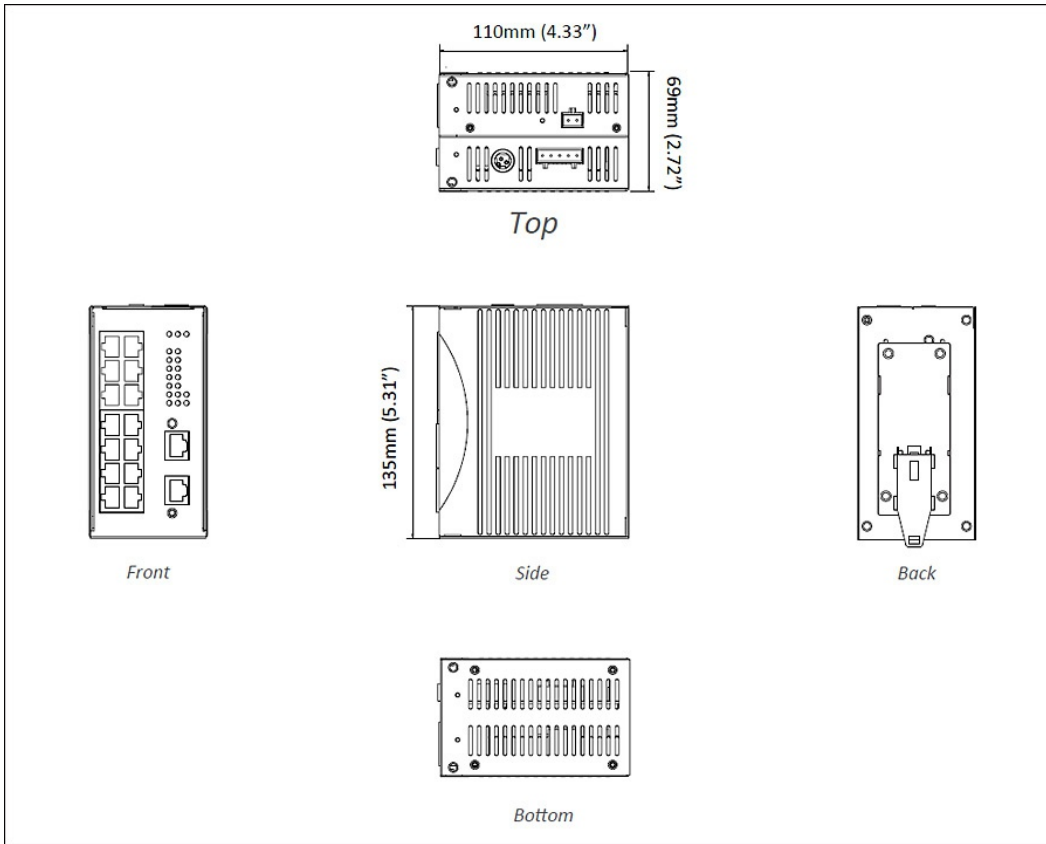

Ordering Info

Model

EX33160-00B	16-port 10/100BASE-TX Industrial Unmanaged Ethernet Switch
EX33151-X0B	15-port 10/100BASE-TX +1-port 100BASE-FX Industrial Unmanaged Ethernet Switch
EX33142-X0B	14-port 10/100BASE-TX +2-port 100BASE-FX Industrial Unmanaged Ethernet Switch

* DIN-Rail mounting kit included.

100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
7	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
8	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
9	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
Q	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
R	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
S	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

Optional Accessories

KP-AA96-480	Panel Mounting Kit
KR-BK-43-400	Rack Mounting Kit
HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply

EDR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply
EX41-145046-X	Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA
EX41-145044-X	Power Supply 45W 12VDC with Latch (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA

