


## EX32900 系列

工業級非網管 5-8埠10/100/1000BASE-T +1埠1000BASE-X Gigabit 乙太網路交換器



### 產品介紹

本產品已經停產，請點選 [此處](#) 尋找替代產品。

EX32900系列為輕巧型非網管鋁軌式機種，5埠或8埠工業級乙太網路交換器，可視使用需求挑選Gigabit乙太網路連接埠或Gigabit RJ45網路埠搭配1個Gigabit光纖埠之組合來支援長距離傳輸。

EX32900系列雖屬非網管機型，但支援Jumbo Frame、full wire speed throughput、QoS support，並符合eco-friendly IEEE 802.3az EEE (Energy Efficient Ethernet)標準。EX32900系列交換器提供12-48VDC備援雙電源輸入、具備斷線告警機制，採EMI/EMS防護等級設計，適用於小規模但分布廣泛的各類應用如工廠自動化、智慧交通及IP監控等應用。

EtherWAN — "When Connectivity is Crucial."

## 產品亮點

### 工業等級設計

- » 操作溫度(-10到60°C)
- » 支援鋁軌式安裝

### 支援Jumbo Frame

- » 最高支援10K bytes (EX32905/EX32914系列)
- » 最高支援9720 bytes (EX32908/EX32917系列)

### 光纖介面連接

- » 最高支援1個1000BASE-FX埠，彈性搭配SC、ST組合

### 高可靠性能

- » 無風扇設計
- » 無風扇設計

## 產品規格

### 技術

#### 標準

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-SX/1000BASE-LX
- IEEE 802.3x Full duplex flow control
- IEEE 802.3az Energy Efficient Ethernet
- IEEE 802.1p Quality of Service (QoS)

#### Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

#### 緩衝記憶體封包

- EX31905/EX32914: 1M bits
- EX32908/EX32917: 192KB

#### 傳輸形式

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

#### 巨大封包

- EX32905/EX32914: 10K bytes
- EX32908/EX32917: 9720 bytes

#### MAC地址表

- EX32905/EX32914: 8K MAC addresses
- EX32908/EX32917: 4K MAC addresses

#### Broadcast Storm Protection Threshold (EX32908/EX32917 only)

- Limit 15000 fps@64 frame size, 600 fps@1518 frame size.
-

## 電源

### 輸入電壓

- 12-48VDC

### 電力供耗

- 6.5W Max. 0.25A@24VDC

### Protection

- Reverse polarity protection
- 

## 機構

### 機殼

- 塑膠外殼
- IP30

### 尺寸

- EX32905/EX32914:  
26 x 76.5 x 114mm (W x D x H)  
(1.02" x 3.06" x 4.33")
- EX32908/EX32917:  
35 x 86 x 149mm (W x D x H)  
(1.4" x 3.44" x 5.96")

### 重量

- EX32905/EX32914: 0.2Kg (0.44lb.)
- EX32908/EX32917: 0.3Kg (0.66lb.)

### 安裝方式

- DIN-Rail (Top hat type 35mm)
- 

## 介面

### 乙太網路埠

- EX32905/EX32914:  
10/100/1000BASE-T: 5 or 4 ports  
1000BASE-X: 0 or 1 ports
- EX32908/EX32917:  
10/100/1000BASE-T: 8 or 7 ports  
1000BASE-X: 0 or 1 ports

## LED 指示燈號

- EX32905/EX32914:

Per Unit: Power (Green)

Per Port: 10/100M(Green), 1000M (Yellow)

- EX32908/EX32917:

Per Unit: Power 1 (Green), Power 2 (Green), Alarm (Red)

Per Port: 10/100M(Green), 1000M (Yellow)

## Alarm Contact (EX32908/EX32917 only)

- One relay output with current 1A@250VAC
- Supports normal close and normal open

## DIP Switches (EX32908/EX32917 only)

- Enable/Disable Port fault alarm
- 

## 環境

### 工作溫度

- -10 to 60°C (14 to 140°F)

Tested @ -20 to 70°C (-4 to 158°F)

### 儲存溫度

- -40 to 85°C (-40 to 185°F)

### 工作濕度

- 5% to 95% (無凝結)
- 

## 通過認證

### ISO

- Manufactured in an ISO 9001 facility

### Safety

UL 60950 (EX32905/EX32914 Series only)

### EMI

FCC Part 15B, Class A

VCCI Class A

EN 61000-6-4

EN 55022 Class A

### EMS

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)


### Environmental Test Compliances

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

## 產品尺寸圖

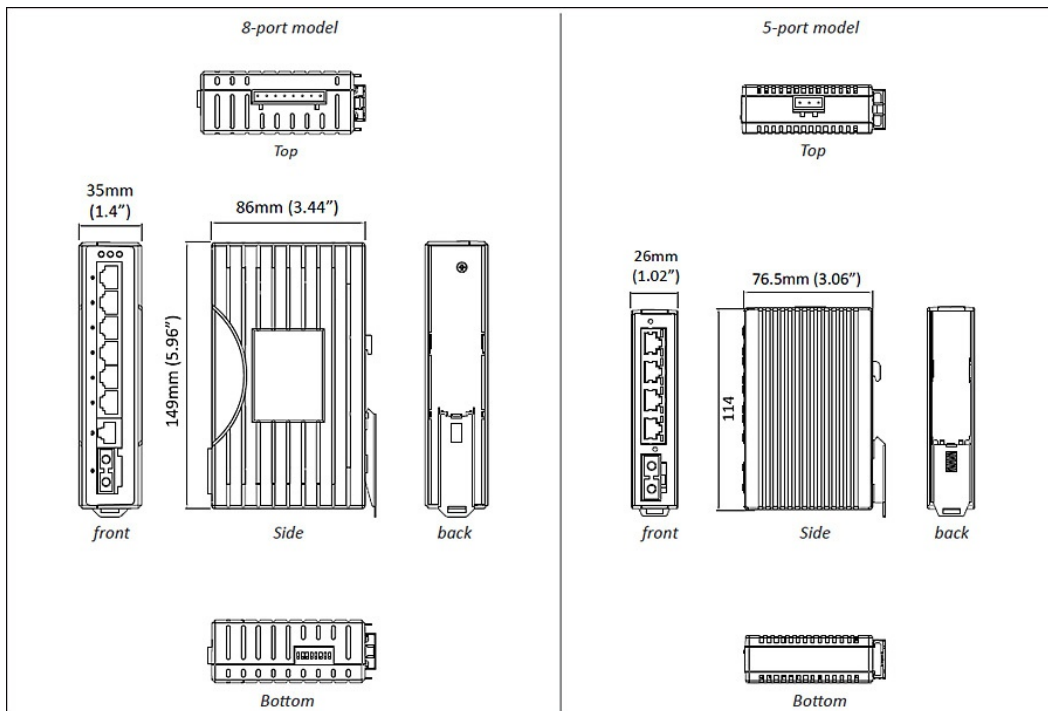

## 訂購型號

### 型號

|           |  |
|-----------|--|
| EX32905   | 5-port 10/100/1000BASE-T Gigabit Industrial Unmanaged Ethernet Switch                    |
| EX32914-X | 4-port 10/100/1000BASE-T +1-port 1000BASE-X Gigabit Industrial Unmanaged Ethernet Switch |
| EX32908   | 8-port 10/100/1000BASE-T Gigabit Industrial Unmanaged Ethernet Switch                    |
| EX32917-X | 7-port 10/100/1000BASE-T +1-port 1000BASE-X Gigabit Industrial Unmanaged Ethernet Switch |

\* DIN-Rail mounting kit included.

### Optical Port Options (X)

|   |   |
|---|---|
| 3 | 1000BASE-SX (SC) - 550m                         |
| 5 | 1000BASE-SX (ST) - 550m                         |
| A | 1000BASE-LX (SC) - 10km                         |
| R | 1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km |
| S | 1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km |

### Optional Accessories

|               |   |
|---------------|---|
| HDR-30-24     | 30W/1.5A DIN-Rail 24VDC Industrial Power Supply   |
| HDR-60-24     | 60W/2.5A DIN-Rail 24VDC Industrial Power Supply   |
| EDR-75-24     | 75W/3.2A DIN-Rail 24VDC Industrial Power Supply   |
| EX41-145046-X | Power Supply 45W 12VDC with Open Wire<br>(X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA |

