

## ED3638

強固級10/100BASE-TX PoL™/PoE以太網路交換器(同軸電纜)



### 產品介紹

The ED3638 Hardened Ethernet Extender utilizes EtherWAN's exclusive Power over Link (PoL) technology to deliver both PoE power and Ethernet communications over a single legacy coaxial cable. The ED3638 PoL solution is comprised of one transmitter and one receiver working together to provide reliable communications and power to remote PoE Powered Devices such as IP cameras, wireless access points, emergency intercoms, or VoIP phones.

With just the transmitter connected to power, the ED3638 provides a maximum of 30 watts of power and a bandwidth of 100Mbps to the ED3638 receiver, at distances up to 400 meters. Under this setup, transmission over longer distances can be achieved with lower data and power throughput — up to 1800 meters at a data rate of 15Mbps and 4 watts of power. However, for applications that require even longer distances, the ED3638 can be connected to power at both the transmitter and the receiver unit, increasing the transmission distance to a remarkable 2400 meters, with a data rate of 4Mbps and a full 30 watts. The current data transmission rate and power sourcing equipment output is displayed by LED indicators.

The ED3638 is highly resistant to electromagnetic interference, shock, and vibration, ensuring connection reliability even in harsh environments.

EtherWAN — "When Connectivity is Crucial."

## 產品亮點

### Power over Link™ up to 1.8 km (5905 ft.)

» Over an 1800 meters long coaxial cable, a guaranteed 4 watts power with 15Mbps bandwidth is delivered to the receiving side

### Ethernet extension solution with high transmission data rate up to 100Mbps

» Up to 400 meters transmission distance with 100Mbps data rate

### Transmission rate and PSE output power indicator LEDs

» Six transmission rate LEDs and three PoE/PSE output power LEDs on the front panel

## 產品規格

### 技術

#### 標準

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX,
- IEEE 802.3x full duplex and flow control
- IEEE 802.3af/at PoE/PSE

#### Protocols

- Transparent to higher layer protocols

#### 傳輸型式

- IEEE 802.3x Full-duplex flow control
- 

### 電源

#### 輸入電壓

- Terminal Block: 46-57VDC
- DC JACK: 48VDC
- 2.5A@48VDC (Peak current 3.26A)

#### 電力功耗

- Max. 65W with Power over Link (PoL) function enabled
- ED3638T: Max. 5W (without PoL/PoE)
- ED3638R: Max. 5W (without PoL/PoE), Max. 35W (with PoE only)

#### Protection

- Over Current Protection
  - Reverse Polarity Protection
- 

### 機構

#### 機殼

- Aluminum Case
- IP30

## 尺寸

- 50 x 110 x 135mm (W x D x H)  
(1.97" x 4.33" x 5.31")

## 重量

- 0.8Kg (1.76lbs.)

## 安裝方式

- DIN-Rail (Top hat type 35mm), Panel or Rack Mounting
- 

## 介面

### 乙太網路埠

- ED3638T/R: 1 x RJ-45 port, 10/100BASE-TX Full-duplex
- ED3638R: 1 x PoE/PSE port
- Auto-Negotiation, Auto-MDI/MDIX
- Speed: 10/100Mbps
- Distance: 100 meters (328ft.)
- Cable: 100BASE-TX: UTP Cat. 5 (4-pair wire)

### Ethernet Extender Port

- Port: One 75Ω BNC Port (with F-type connector)
- Cable: Coaxial Cable (5C2V/RG6)

### DIP Switch

- ED3638T: PoL: On/Off, Type: Perf/Std
- ED3638R: Mode: Loc/Rmt, Type: Perf/Std

### LED 指示燈號

- Per Unit: Power Status (Power)
- Per Port 10/100TX: Link/Activity, Full-duplex
- Line Speed: Six indicators for 100/80/60/40/20Mbps and Link below 20Mbps
- PoE: Power over Ethernet function availability

### ► Speed/Distance Reference

#### \* PoL™ Enabled

Distance	Data Rate	ED3638R PoE Output
----------	-----------	--------------------

400m	100Mbps	30.0W
800m	60Mbps	15.4W
1000m	50Mbps	12.0W
1200m	45Mbps	8.0W
1600m	20Mbps	6.0W
1800m	15Mbps	4.0W

**\* PoL™ Disabled (Power Supply Applies on ED3638R)**

Distance	Data Rate	ED3638R PoE Output
2000m	9Mbps	30.0W
2200m	6Mbps	30.0W
Up to 2400m	4Mbps	30.0W

## 環境

### 工作溫度

- -40 to 75°C (-40 to 167°F)
- Tested @ -40 to 85°C (-40 to 185°F)

### 儲存溫度

- -40 to 85°C (-40 to 185°F)

### 工作濕度

- 5% to 95% (無凝結)

## 通過認證

### ISO

- Manufactured in an ISO 9001 facility

### Safety

- UL 60950-1
- IEC 60950-1

### EMI

- FCC Part 15B Class A

EN 61000-6-4

EN 55022

EN 61000-3-2

EN 61000-3-3

## **EMS**

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

## **Environmental Test Compliance**


IEC 60068-2-6 Fc (Vibration Resistance)

IEC 60068-2-27 Ea (Shock)

IEC 60068-2-32 Ed (Free Fall)

---

## 產品尺寸圖

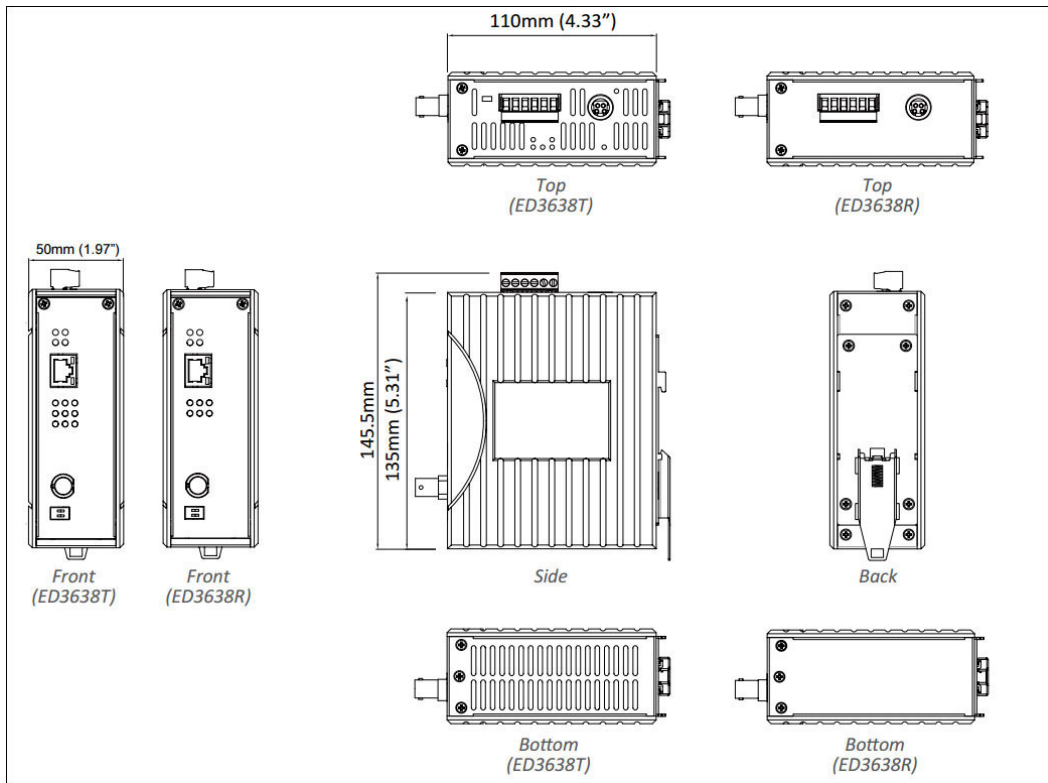

## 訂購型號

### 型號

<b>ED3638</b>	Hardened PoL/PoE Ethernet Extender over Coaxial Cable (Including one ED3638T and one ED3638R)
---------------	---

\* ED3638T is the power transmitter of PoL and ED3638R is the power receiver of PoL.

\* DIN-Rail mounting kit included.

## Optional Power Supplies

<b>EDR-120-48</b>	120W/2.5A DIN-Rail 48VDC Industrial Power Supply
<b>NDR-120-48</b>	120W/2.5A DIN-Rail 48VDC Industrial Power Supply
<b>SDR-480-48</b>	480W/10A DIN-Rail 48VDC Industrial Power Supply



© EtherWAN Systems, Inc. All rights reserved. 20220721

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.