

EL2315 系列

10/100/1000BASE-TX - 100/1000BASE-X Dual Rate SFP 光電轉換器



產品亮點

+ 支援全Gigabit頻寬

10/100/1000BASE-TX 和 1000BASE-SX/LX/BX 乙太網信號自動轉換
光纖支持100BASE-FX和1000BASE-SX/LX相互轉換

+ 支援Link-Fault-Pass-Through (LFPT)

針對光電轉換器連線狀態提供持續的監控
當連線的其中一端光纖中斷訊，LFPT會中斷乙太網路 (RJ-45)埠之連線，以告知連線之設備網路連線已中斷

+ 支援100/1000BASE-FX 雙速率 SFP

可通過 DIP 指撥器切換100BASE 或 1000BASE SFP

產品介紹

The EL2315 Series provides media conversion between 10/100/1000BASE-T(X) and 100/1000BASE SFP Fiber. The EL2315's fiber design is compatible to 100BASE fiber or 1000BASE fiber transceiver. Through DIP switch selection, the EL2315's SFP port can support 100BASE SFP fiber or 1000BASE-X SFP fiber port. Also, through DIP switch selection, the Link-Fault-Pass-Through (LFPT) function can be active or disabled.

With Gigabit transmission rate, EL2315 supports Jumbo Frame up to 9K bytes, the EL2315 is the ideal media converter for environments where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

產品規格

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x Full duplex and flow control

Forward and Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps

Processing Type

Store-and-Forward
Auto Negotiation
Half duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto-MDI/MDIX

+ Power

Input

12VDC

Power Consumption

2.76W Max. 0.23A@12VDC

+ Mechanical

Casing

Aluminum Case

Dimensions

80.3 x 109.2 x 23.8mm (W x D x H)
(3.16" x 4.3" x 0.94")

Weight

150g (0.336lbs.)

Installation

Wall mounting

+ Interface

Ethernet Port

10/100/1000BASE-TX: 1 port
100/1000BASE SFP Slot: 1 port

DIP Switch

No.1: LFPT On/Off
No.2: Auto-Negotiation/Force Mode for TX port
No.3: Full-duplex/Half-duplex for TX port

No.4: 100Mbps/10Mbps Force Mode for TX port
 No.5: 100Mbps/1000Mbps for SFP
 No.6: Function Reserved

LED Indicators

Per Unit: Power, LFPT
 Per Port: FX/TX Speed, Link/Activity

+ Environment

Operating Temperature

0 to 50°C (32 to 121°F)

Storage Temperature

-10 to 70°C (-14 to 158°F)

Ambient Relative Humidity

5% to 95% (non-condensing)

+ Regulatory Approvals


ISO

Manufactured in an ISO 9001 facility


Emission Compliances

CE Mark Class A
 FCC Part 15B Class A
 VCCI Class A

產品應用圖

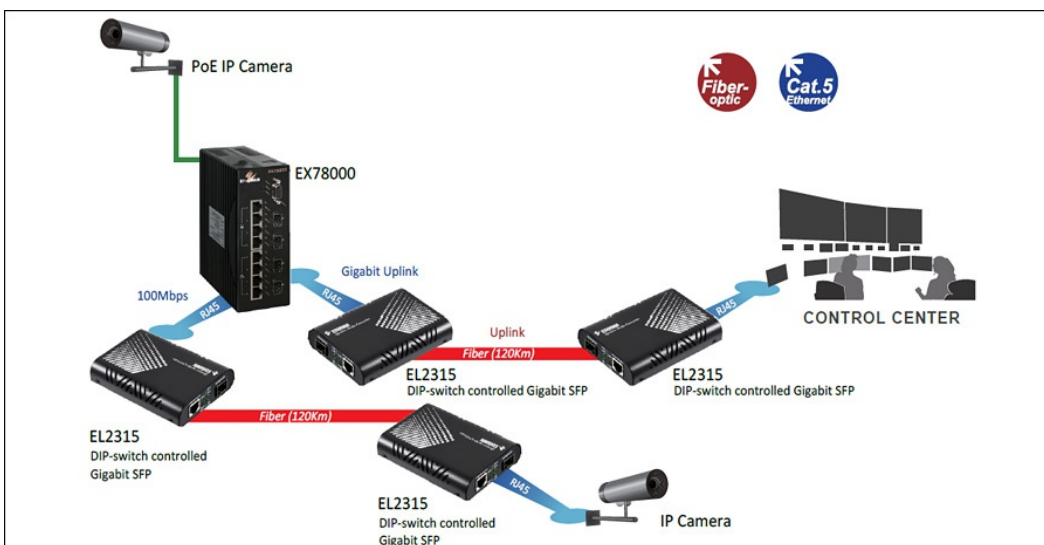

產品尺寸圖

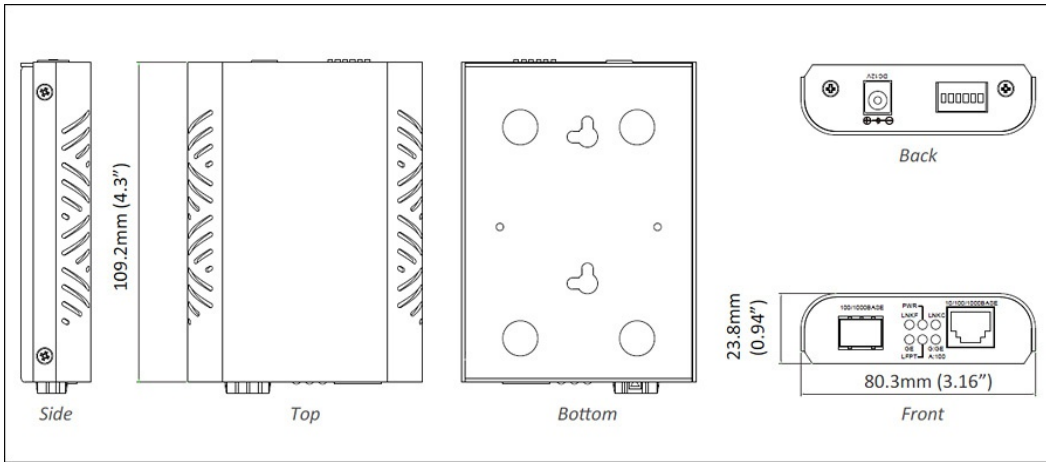

訂購型號

+ Model

EL2315-X 10/100/1000BASE-TX to 100BASE/1000BASE-X Dual Rate SFP Media Converter

+ Power Adapter Options (X)

- A with external power adapter for AU
- E with external power adapter for EU
- J with external power adapter for JP
- K with external power adapter for UK
- U with external power adapter for USA
- 3C with external power adapter for China

+ Optional SFP Non-Hardened Type Gigabit Fiber Transceivers

Model Name	Distance	Cable Type	Connector Type	Wavelength	Link Budget**	Optical Sensitivity Output Power
EX-1250NSP-SB1L S	275m/550m	62.5/125µm/50/125µm, Duplex MM	LC	850nm	7.5dBm	-9.5 to -17dBm 4dBm
EX-1250TBP-MB1L S	550m	62.5/125µm/50/125µm, Single MM	LC	TX: 1310nm RX: 1550nm	7dBm	-10 to -17dBm 4dBm
EX-1250TBP-LB1L S	550m	62.5/125µm/50/125µm, Single MM	LC	TX: 1550nm RX: 1310nm	7dBm	-10 to -17dBm 4dBm
EX-1250TSP-MB4L S	10Km	9/125µm, SM	Duplex LC	1310nm	11.5dBm	-9.5 to -21dBm 3dBm
EX-1250TBP-MB4L S	10Km	9/125µm, SM	Single LC	TX: 1310nm RX: 1550nm	12dBm	-9 to -21dBm 3dBm
EX-1250TBP-KB4L S	10Km	9/125µm, SM	Single LC	TX: 1550nm RX: 1310nm	12dBm	-9 to -21dBm 3dBm
EX-1250TBP-MB5L S	20Km	9/125µm, SM	Single LC	TX: 1310nm RX: 1550nm	15dBm	-8 to -23dBm 3dBm
EX-1250TBP-KB5L S	20Km	9/125µm, SM	Single LC	TX: 1550nm RX: 1310nm	15dBm	-8 to -23dBm 3dBm
EX-LS38-C3L-TC-N-EB (DDM)	40Km	9/125µm, SM	Duplex LC	1310nm	20dBm	-3 to +2dBm -23dBm
EX-LS38-C3L-TC-N-CE (DDM)	40Km	9/125µm, SM	Single LC	TX: 1310nm RX: 1550nm	20dBm	-3 to +2dBm -23dBm
EX-LS48-C3L-TC-N-CE (DDM)	40Km	9/125µm, SM	Single LC	TX: 1550nm RX: 1310nm	20dBm	-3 to +2dBm -23dBm

* More SFP options upon request.

** Link Budget data is based on pair of the same modules.

