

EX78900G 系列

強固級網管型 8埠 Gigabit PoE++ (90W) + 4埠 100/1G/2.5G SFP 乙太網路交換器



產品亮點

+ 2.5GbE 高頻寬網路交換器

8 埠 PoE Gigabit 全千兆高頻寬連接
4 個獨立 SFP 埠支援三速 100/1G/2.5G 光纖連接
高達 36Gbps 交換容量的全雙工運行
支援 2.5Gbps 超高速連接埠，頻寬再升級

+ 適用於不通風和惡劣環境的強固設計

-40 至 75°C 寬工作溫度範圍
無風扇設計
高衝擊、耐熱和電氣干擾抵抗力
6Kv防雷突波設計

+ 第三層網管功能

靜態路由、RIP v1/v2, 和 OSPF
VRRP 虛擬路由器備援協定

+ PoE供電

支援所有PoE標準 – IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt (PoE, PoE+, PoE++)
高功率 PoE 輸出 – 每埠支援 90W
高功率 PoE 預算 – 整機支援高達 480W 總功率
智慧遠端監控 – PoE 看門狗 (PoE Watchdog) 功能

+ 服務支援

提供技術支援
免費韌體升級和通知
有限終身保固

產品介紹

益網科技 EX78900G 系列是工業用強固級網管型導軌式 PoE 乙太網交換機。網路連接埠配有 8 個 90W 功率的 Gigabit PoE 千兆埠，以及 4 個 2.5G SFP 光纖端口。本系列 PoE 總輸出功率最高可達 480W 大功率供電，並支援國際 PoE 標準 IEEE 802.3.bt (PoE++), IEEE 802.3.at (PoE+), IEEE 802.3.af (PoE)，保證長時間穩定供電需求。4 個 SFP 光纖埠提供三種速率 (100/1G/2.5G)，可建立從 100Mbps、1Gbps、到高速 2.5Gbps 頻寬連線，並配上豐富的 L2 與 L3 功能，提供建立具規模且穩固的網路架構。EX78900G 系列可為城市基礎設施、交通、安全和監控領域的重要網路連結、提供靈活、高速和可靠的通訊表現。

EtherWAN — "When Connectivity is Crucial."

產品特色

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware Upgrade

Configuration Backup

DHCP Server/Client/Snooping/Relay

RMON (Remote Monitoring)

Port Mirroring

NTP (Network Time Protocol)

Synchronization

LLDP (Link Layer Discovery Protocol)

IPv4/IPv6

SNMP v1/v2c/v3

+ Security

MAC Address Filtering

Enable/Disable Port

Storm Control

System logging

Remote Authentication through RADIUS and
TACACS+

Complex Password Support

Multi-User Login and Privileged Access
Management

SSH for CLI and Telnet Security

SSL and HTTPS for Web Security

ACL (Access Control List)

+ Quality of Service (QoS)

Priority Queues: 8 Queues per Port

Traffic Classification Based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and Strict Mode

Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-Negotiation for Port Speed and Duplex

Flow Control

IEEE 802.3x full duplex mode

Back-pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP

IEEE 802.1w RSTP

IEEE 802.1s MSTP

ITU-T G.8032 Ethernet Ring

Protection Switch (ERPS)

VLANs

IEEE 802.1Q Tag VLANs

GVRP

GMRP

Link Aggregation

Static Trunk (8 groups)

IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing

Maximum 512 hosts

Maximum 64 routes

Static routing

RIP v1/v2

OSPF v2

+ Software Properties and Performance

Switching Fabric

36Gbps

Forwarding Rate

26.78Mpps

Max VLANs

256 (4096 VID)

Jumbo Frame Size

9KB

MAC Table Size

16K

Packet Buffer Memory

512KB

產品規格

+ Interface

Ethernet

8 x 10/100/1000BASE-T(X)

2 or 4 x 100/1000/2500BASE SFP

Console

1 x RJ45

Config Backup

1 x USB (Type A Connector)

Alarm Contact

Relay output, current capacity 0.5A/48VDC

LED Indicators

Per Unit: Power 1, Power 2

Per Port: Link/Activity (Green)

Per PoE Port: PoE Status (Amber)

+ Technology

Standards

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3ad link aggregation control

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x full duplex and flow control

IEEE 802.1D STP

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1s MSTP

IEEE 802.1w RSTP

IEEE 802.1x Radius

IEEE 802.1ab LLDP

IEEE 802.3az Energy-Efficient Ethernet (EEE)

IEEE 802.3af/at/bt Power over Ethernet

Forward/Filtering Rate

14,880pps for 10Mbps

148,809pps for 100Mbps

1,488,095pps for 1000Mbps

3,720,238pps for 2500Mbps

Processing Type

Store-and-forward

Auto-negotiation

Half-duplex back-pressure and full-duplex
flow control

Auto MDI/MDIX

System Memory

1GB DDR3 SDRAM

Flash Storage

128MB

+ Power

Input

46-57VDC Redundant (Terminal block)**

** Connected powered devices (PDs) power
input requirements:

IEEE 802.3 af (15W): 46 – 57 VDC

IEEE 802.3 at (30W): 52 – 57 VDC

IEEE 802.3 bt (Type 3: 60 Watts): 52 – 57 VDC

IEEE 802.3 bt (Type 4: 90 Watts): 54 – 57 VDC

Power Consumption

Max. 14W (without PoE)

Power Budget (Max.)

For EX78912G-0BT:

- 240 Watts

For EX78924G-0BT & EX78922G-0BT:

- 480 Watts up to operating temp. 70°C
- 400 Watts up to operating temp. 75°C

Protection

Reverse Polarity Protection

+ Physical

Casing Material

Metal

IP Rating

IP30

Dimensions

62 x 125 x 145mm (W x D x H)

Weight

0.75 kg (1.65 lbs)

Installation Type

DIN-rail mounting

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

MTBF

TBD

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EMS

EN 61000-6-2

Safety

UL 62368

Traffic

NEMA TS2

Rail

EN 50121-4

Vibration

IEC 60068-2-6

Shock

IEC 60068-2-27

Free Fall

IEC 60068-2-31

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet switch


Cables

1 Console cable

Installation

Mounting brackets, screws

產品尺寸圖

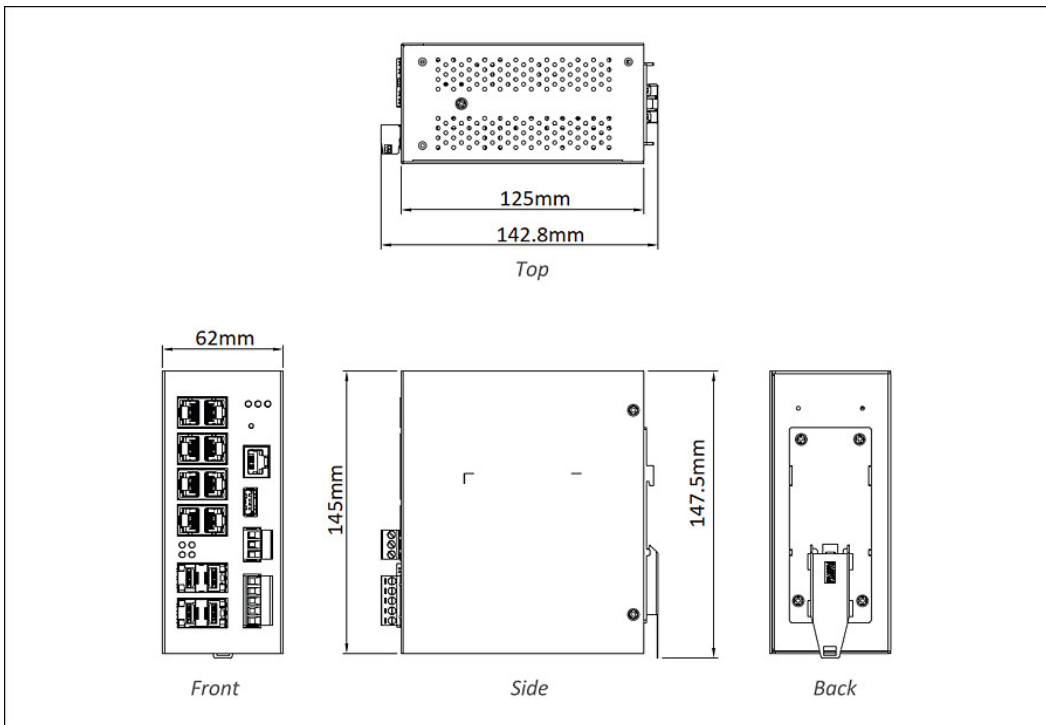


應用圖

管理軟體

網路管理 [eVue™ 網路配置和監控工具](#)


網路探索 [eLite™ 網路偵測 IP 配置工具](#)

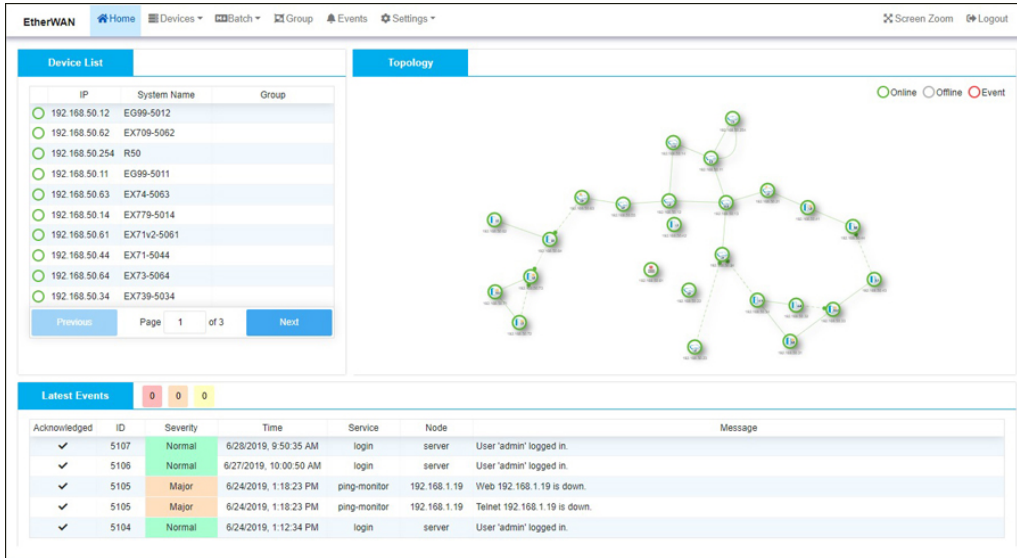

The screenshot shows the EtherWAN management interface. On the left, there is a 'Device List' table with columns for IP, System Name, and Group. On the right, there is a 'Topology' diagram showing a network of interconnected nodes. Below these, there is a 'Latest Events' section with a table of system events.

IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/28/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Teinet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

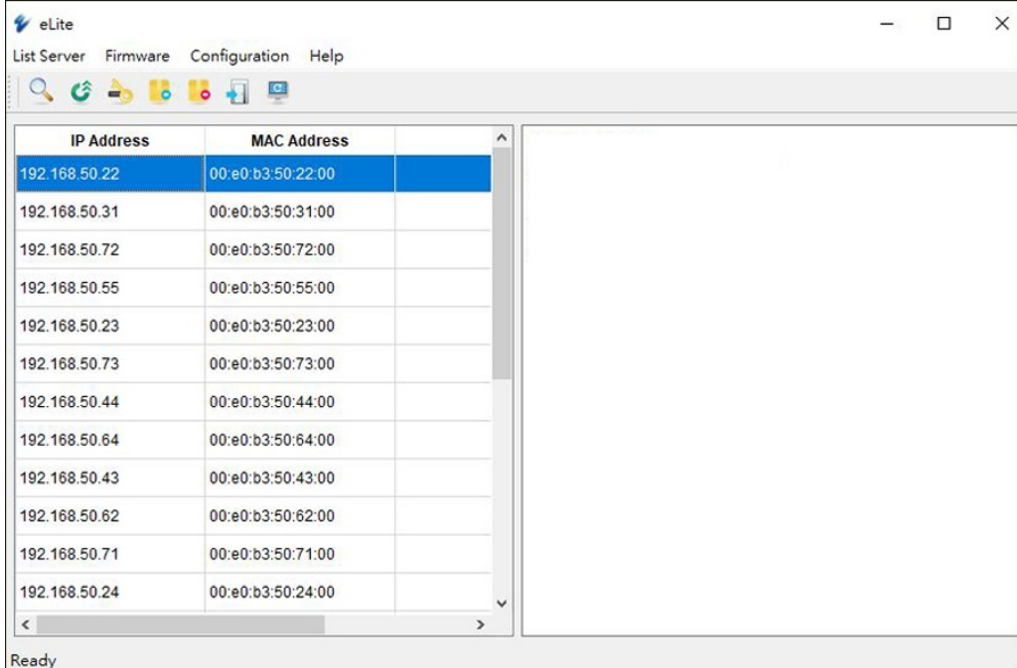

The screenshot shows the eLite network discovery tool interface. It features a menu bar with 'List Server', 'Firmware', 'Configuration', and 'Help'. Below the menu is a table displaying discovered IP addresses and their corresponding MAC addresses.

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

訂購型號

+ Model

EX78924G-0BT	8-port 10/100/1000BASE-T(X) PoE++ 90W + 4-port 100/1000/2500BASE SFP
EX78922G-0BT	8-port 10/100/1000BASE-T(X) PoE++ 90W + 2-port 100/1000/2500BASE SFP
EX78912G-0BT	4-port 10/100/1000BASE-T(X) PoE++ 90W + 4-port 10/100/1000BASE-T(X) + 2-port 100/1000/2500BASE SFP

+ Accessories

SFP Modules

Model Number	Transmission Speed	Mode	Distance	Operating Temperature	Wavelength	Connector Type	DDM
SFP2IS20M	2500Mbps	Single-mode	20km	-40 to 85°C	1310nm	Duplex LC	✓
SFP2IM2AM	2500Mbps	Multi-mode	160m	-40 to 85°C	850nm	Duplex LC	✓
SFP2XT1AM	2500Mbps	-	100m	-40 to 85°C	-	RJ-45	-
SFPGIM5AM	1000Mbps	Multi-mode	275/550m	-40 to 85°C	850nm	Duplex LC	✓
SFPGIM02M	1000Mbps	Multi-mode	2km	-40 to 85°C	1310nm	Duplex LC	✓
SFPGIS10M	1000Mbps	Single-mode	10km	-40 to 85°C	1310nm	Duplex LC	✓
SFPGIS20M	1000Mbps	Single-mode	20km	-40 to 85°C	1310nm	Duplex LC	✓
SFPGXT1AM	1000Mbps	-	100m	-40 to 85°C	-	RJ-45	-
EX-0155NSP-MB2L-A	100Mbps	Multi-mode	2km	-40 to 85°C	1310nm	Duplex LC	-
SFPMIS20M (DDM)	100Mbps	Single-mode	20km	-40 to 85°C	1310nm	Duplex LC	✓

For more SFP, please visit website: www.etherwan.com/products/sfp-fiber-transceiver



Industrial DIN-Rail Power Supplies

Model Number	Input Voltage	Output Voltage	Description	Operating Temperature
NDR-480-48	90 - 264VAC	48VDC	480W/10A DIN-Rail 48VDC Industrial Power Supply	-20 to 70°C
NDR-240-48	90 - 264VAC	48VDC	240W/5A DIN-Rail 48VDC Industrial Power Supply	-20 to 70°C

NDR-120-48	90 - 264VAC	48VDC	120W/2.5A DIN-Rail 48VDC Industrial Power Supply	-20 to 70°C
------------	-------------	-------	--	-------------


For more Power Supplies, please visit website: www.etherwan.com/products/din-rail-power-supply.

+ DIN-Rail Mounting Kits

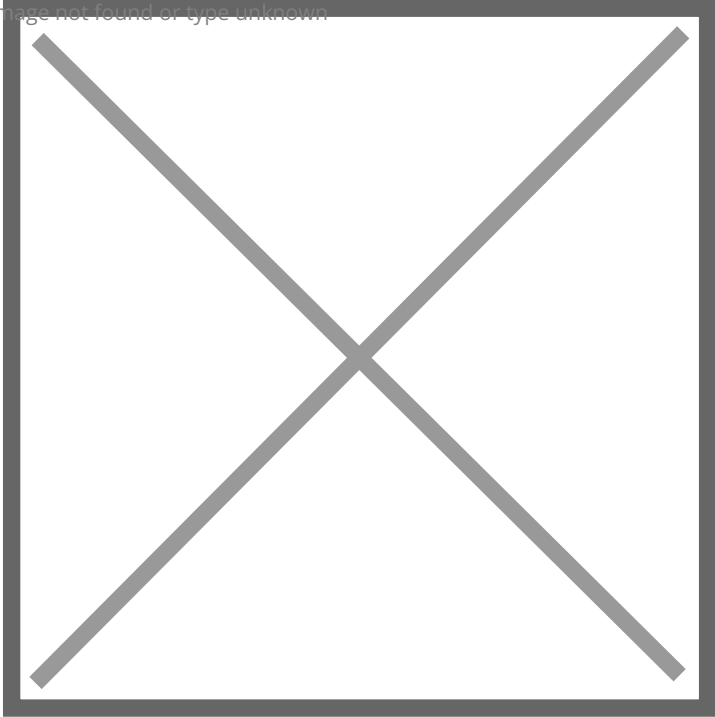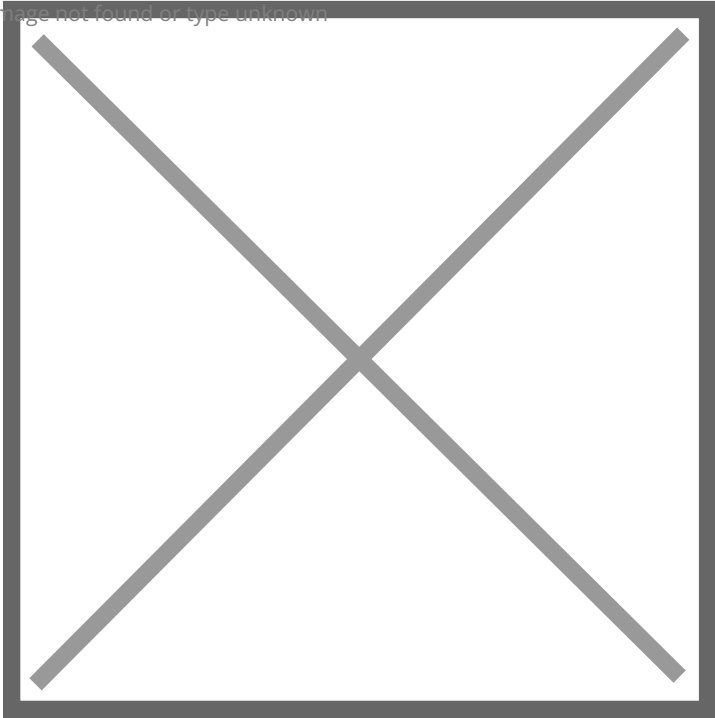Part Name	Description
KP-AA96-480	Image not found or type unknown 
KP-G300	Image not found or type unknown 

KR-BK71000

Image not found or type unknown

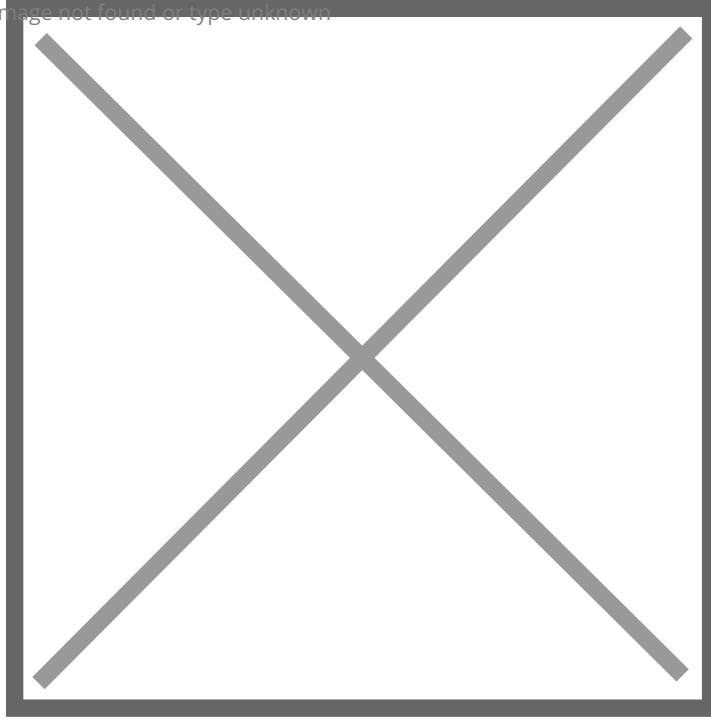

© EtherWAN Systems, Inc. All rights reserved. 20240201

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.