

EW50 系列

工業級 LTE Cellular 行動通訊閘道器



產品亮點

+ 多元介面彈性搭配

可連接各種領域的乙太網路、序列、DI/DO 和 Modbus 橋接設備
完美應用於M2M(機器對機器) 及IIoT(工業物聯網)應用架構

+ 可靠、不間斷的傳輸品質

故障切換功能的雙 Micro-SIM LTE 模組設計，支援行動傳輸備援
Fail over管理機制確保網路穩定可靠度
不斷線 4G LTE 網路/IP 透通模式
支援全球主要電信網路商 HSPA+ 和 4G LTE 網路認證
10/100/1000BASE-TX 網路埠，具備標籤和 VLAN，可輕鬆控制羣組流量

+ 全面資安防護

支援IPSec, OpenVPN, PPTP, L2TP, VPN，提供VPN安全連接保護
可同時建立多達16個VPN通道，最大流量可達70Mbps(IPSec)
具備 SPI 和 IPS 的防火牆以防止駭客入侵
使用 SNMP 和 Telnet CLI 管理系統

+ 工業等級設計

IP30、無風扇、金屬外殼設計
支援-30到70°C(-22 至 158°F)的操作溫度

產品介紹

EW50為一款智慧型工業級行動通訊閘道器 (工業級4G LTE Cellular Gateway)，針對公共基礎建設及各類工業應用環境設計安全，值得關注的是產品的低功耗設計，僅需7W便可完整運作，符合現今的環保節能趨勢。內建二組高速乙太網路傳輸埠，提供高速可靠的資料傳輸，即時IT斷線警告，最適合遠端安全監控管理。

多種通訊協定介面：無線、乙太網路、串列訊號和digital I/O供最佳傳輸品質，可滿足多種應用環境。符合全球LTE通訊標準，可快速佈建易於管理的遠距行動通訊網路架構。

[Industrial LTE Cellular Gateway | Promotion Page EW50 Series](#)

頻率段

| Skus Code | 4G LTE FDD LTE | TDD LTE | 3G WCDMA | 2G GSM/EDGE | Region |
|------------|--|---|---|--------------------------------------|---|
| TA | B1(2100)/ 3(1800)/ 4(AWS)/ 5(850)/ 7(2600)/ 8(900)/ 28(700 APT) | B40(2300) | B1(2100)/ 2(1900)/ 5(850)/ 8(900) | B2(1900)/ 3(1800)/ 5(850)/ 8(900) | Taiwan, Australia |
| EUS | B1(2100) / 3(1800) / 5(850) /7(2600) / 8(900) / 20(800) | B38(TD 2600)/ 40(TDV 2300)/ 41(TD 2500) | B1/ B5/ B8 | B3(1800)/ 8(900) | EU, Singapore, Malaysia, Vietnam, Thailand, Turkey, Philippines, India, Indonesia, South Korea |
| JP | B1(2100)/ B3(1800)/ B8(900)/ B18(800 Lower)/ B19(800 Upper)/ B26 | B41(TD 2500) | B1(2100)/ 6(UMTS only)/ 8(900)/ 19(800 Upper) | - | Japan |

產品規格

+ Cellular Interface

標準

- Cellular Frequency Bands: (Please check Frequency Bands Region Codes)
- LTE Cat. 4: FDD-LTE, TDD-LTE, Transfer rate (max):
LTE FDD: 150Mbps down; 50Mbps up
LTE TDD: 130Mbps down; 35Mbps up
- 3G: WCDMA, Transfer rate (max): 42Mbps down; 5.76Mbps up
- 2G: GSM/EDGE, Edge Transfer rate (max): 236.8Kbps down & up

Antenna connector

- 2 x SMA Female

SIM Slot

- 2

+ Ethernet

標準

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3ab 1000BASE-T

Ports

- 2 x RJ45 GE

Physical Layer

- 10/100/1000BASE-T

+ Serial

Ports

- 2 x RS-232/RS-485

+ I/O

DI/DO

- 1 x Digital In ("Logic 0": 0-2V, "Logic 1": 5V-30V)
- 1 x Digital Out (Relay Mode, up to 30V/1A)

+ USB

Standards

- USB 2.0

Ports

- 1 x USB Type A

+ Micro SD

- Capacity
- Max. Storage of 64GB

+ Functions

- VLAN
- Port-based, Tag-based VLAN
- Port Forwarding
- Virtual Server/Computer (1-1), DMZ Host, PPTP/L2TP/IPSec Pass-through
- Routing
- Static, Dynamic: RIP1/RIP2, OSPF, BGP
- VPN
- IPSec, OpenVPN, PPTP, L2TP, GRE
- Firewall
- SPI Firewall with Stealth Mode, IPS
- Event Engine/Event Handling
- Managing/Notifying Events: DI, DO, Modbus, SMS, Syslog, SNMP Trap, Email Alert, Reboot

+ Cloud Development Platform

- Support Microsoft Azure

+ Field Communication

- Virtual COM
- RFC2217, TCP Client, TCP Server, UDP
- Modbus
- Gateway for Modbus TCP, Modbus RTU/ASCII Master/Slave Access
 - Slave for Device Status/Information Access
- Data Logging
- Sniffer, Off-line/Full-time Proxy, Mixed modes
- Data Interchange
- MQTT Broker, MQTT Client

+ 電源

- 輸入電壓
- DC 9V-36V
- 電力功耗
- 7.0W Max.

+ 機構

- 尺寸
- 31 x 99 x 130.6mm (w/o mounting brackets)
- 重量
- 0.9Kg (1.98lb)
- 安裝方式
- DIN-Rail

+ 環境

- 工作溫度
- -30 to 70°C (-22 to 158°F)
- 儲存溫度
- -40 to 85°C (-40 to 185°F)
- 工作濕度
- 5% to 95% (無凝結)


+ 通過認證

- Safety
- EN 60950-1
 - EN 62368-1: 2014
- Emissions/Immunity
- EW50-TA FCC/NCC/RCM
 - EW50-EUS FCC/CE/NBTC/NTC/KC*/SDPPI**
 - EW50-JP VCCI/JATE


- Note:**
- KC*: EW50 doesn't support SKT SIM card, suggest

to use Global SIM card or Non-SKT SIM Card.
 SDPPI** : Indonesia Radio Type Approval
 78410/SDPPI/2021
 13696

產品應用圖

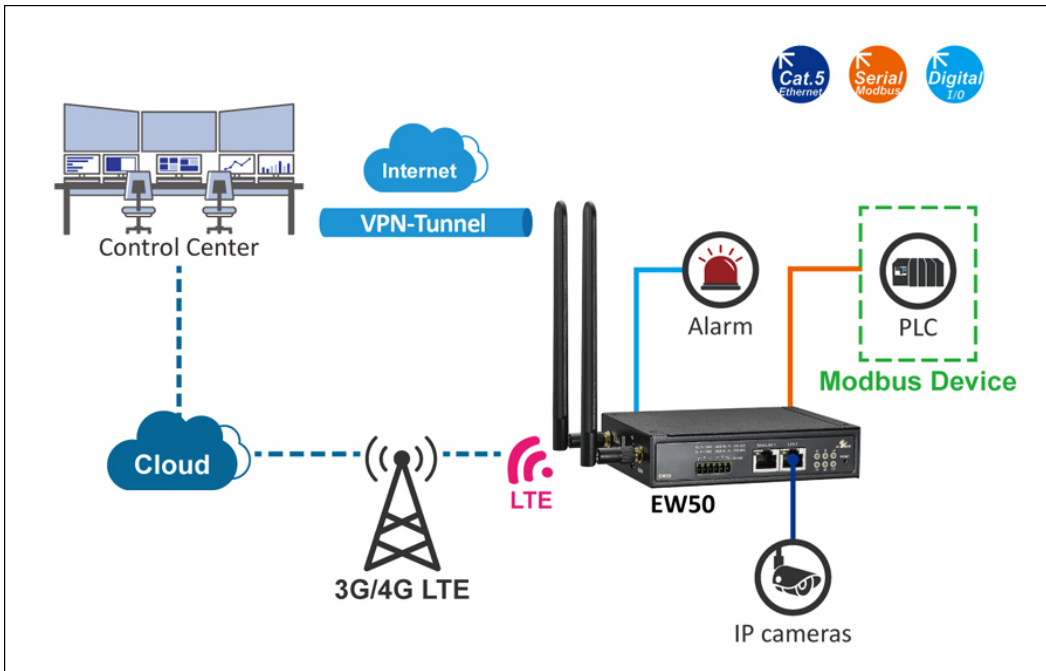

產品尺寸圖

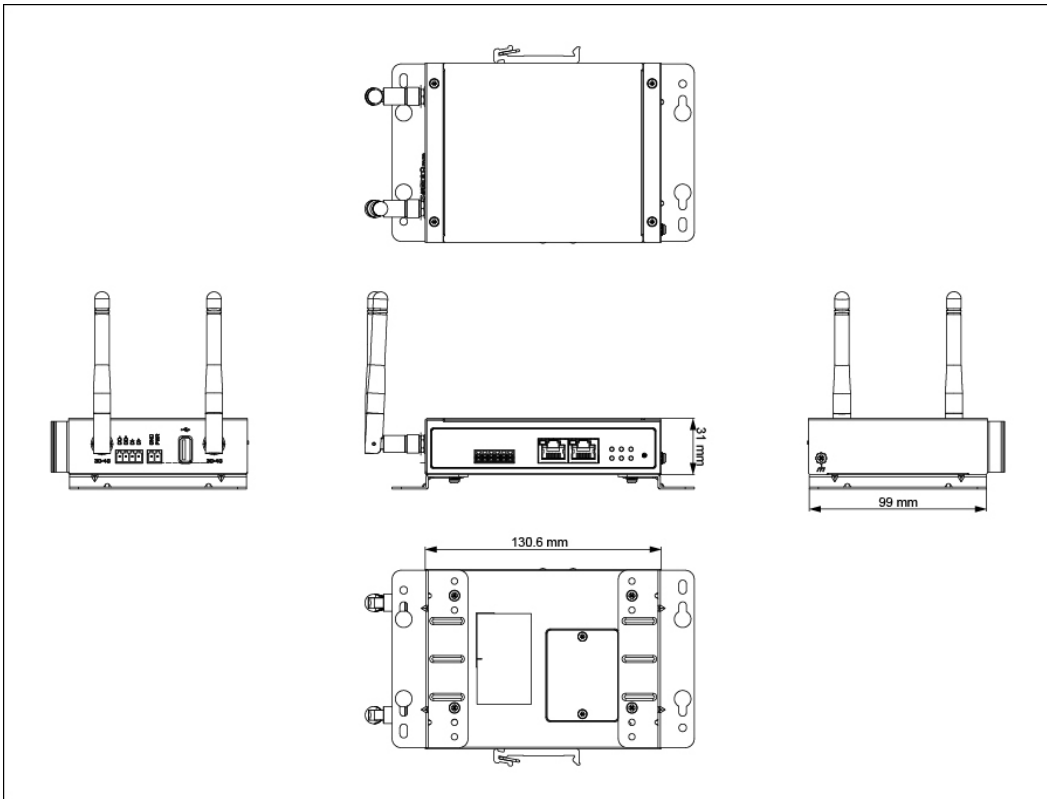







訂購型號

型號

| | |
|----------|---|
| EW50-EUS | Industrial LTE Cellular Gateway-EUROPE & SOUTH ASIA |
| EW50-TA | Industrial LTE Cellular Gateway-TAIWAN & AUSTRALIA |
| EW50-JP | Industrial LTE Cellular Gateway-JAPAN |

Optional Accessories

| GWAP-1 | | Item | Amount | Frequency | Description | Note |
|---|---|-----------------------|--------|----------------------------------|---|------|
|  | | LTE | 2 | 698-960/ 1710-2170/ 2300-2690MHz | Cellular Omni Antenna, N/female Jack Bulkhead | IP67 |
|  | | Surge Protector | 2 | - | 0-6GHz Surge Lightning Protector, N/female Jack Bulkhead To N/male Plug | IP67 |
|  | | Bracket | 2 | - | - | - |
|  | | LTE Cable | 2 | - | SMA/male Plug To N/male Plug with NFC200 Cable | - |
| P/N. | Image | Item | Amount | Frequency | Description | Note |
| W96G-GY113HT46 |  | Cellular Antenna Base | 1 | - | This antenna base can be used on EW50 / EW200 / AiR PACE LTE antenna to extend 1.5M. Each model needs 2 antenna bases. This antenna base is not IP67. | - |
| W96G-11361Y50S |  | Wall Mount Kit | 1 set | - | 1 set package includes 2 wall mount (Right side & Left side) & 4 pcs screws | - |

影片

