

EX73900 系列

IEC 61850-3/IEEE 1613 Lite L3 強固級網管型 12 - 16 埠 Gigabit 乙太網路交換器



產品亮點

+ 高頻寬彈性配置

8 或 12 個 10/100/1000BASE-T(X) 高速連接埠
多達 4 個 Gigabit 光纖上行鏈路連接埠
全雙工運行的全容量交換

+ 強固等級適用於不通風的惡劣環境

-40 至 75°C (-40 至 167°F) 的寬工作溫度範圍
無風扇設計
高衝擊、耐熱和電氣干擾抵抗力

+ 簡配第 3 層網管功能

靜態路由、RIP v1/v2, 和 OSPF
VRRP 虛擬路由器備援協定
廣播流量減輕

+ 認證規範

IEC 61850-3 / IEEE 1613 變電站認證
NEMA TS2 規範
UL 安全認證

+ 管理/安全功能

連接埠控制
支援 RADIUS 優化網路安全機制
使用 eVue™ 和 eLite™ 設定和監控

+ 服務支援

提供技術支援
免費韌體升級和通知
有限終身保固

產品介紹

When should you use an Industrial Layer 3 switch?

益網科技 EX73900 系列強固級乙太網路交換器，提供高達 12 個 10/100/1000BASE-TX + 4 個 Gigabit SFP 埠。搭配益網獨家技術 Alpha-Ring 環狀網路備援機制，可在網路發生斷線時迅速啟動備援機制，於 15 毫秒內便可快速恢復連線。完整管理功能，包含 Port Security、IGMP Snooping、VLANs、GARP 協定、Link Aggregation 和 ACL；使用者可透過網頁瀏覽 Telnet、SSH、SNMP、RMON、TFTP 和 RS-232 Console 管理介面。

EX73900 系列專為嚴峻戶外環境設計打造，鋁軌式安裝，符合 IEC 61850 & IEEE 1613 標準，可在高 EMI 環境及 -40 到 75°C 寬溫環境下穩定運作，在嚴峻的專案規劃佈局中扮演致勝的關鍵角色。

EtherWAN — "When Connectivity is Crucial."

產品特色

+ Interface

- CLI, Telnet, Web Browser
- SNMP v1/v2c/v3

+ Management

- Firmware upgrade
- Configuration backup via TFTP
- DHCP Server/Client
- RMON (Remote Monitoring): group 1, 2, 3, 9
- Port Mirroring: TX/RX and both
- NTP (Network Time Protocol) synchronization
- IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
- IPv4/IPv6

+ Security

- MAC Address Filtering
- Enable/Disable port
- Storm control (Broadcast and multicast types)
- IEEE 802.1x LAN Access Control
- Remote authentication through RADIUS and TACACS+
- SSH for CLI and Telnet security
- SSL for web security
- System log (Remote/Local)
- ACL (Access Control List, up to 4096 entries)

+ Quality of Service (QoS)

- Priority Queues: 4 queues per port
- Traffic classification based on IEEE 802.1p CoS, DSCP, WRR and strict mode
- Rate Limiting (Ingress/Egress)

+ Layer 2 Features

- Auto-negotiation for port speed and duplex mode
- Flow Control
- IEEE 802.3x Full duplex mode
- Back-Pressure half duplex mode

Redundant Protocols

- IEEE 802.1D STP
- IEEE 802.1w RSTP
- IEEE 802.1s MSTP

VLANs

- IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
- GVRP
- GMRP

Link Aggregation

- Static Trunk (4 groups, support MAC base)
- IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing

- Maximum number of routes in hardware: 64 entries
- Static Routing
- RIP v1/v2
- OSPF v2

Routing Redundancy

- VRRP

產品規格

+ Interface

Ethernet

8 or 12 x 10/100/1000BASE-T(X)

4 x 1000BASE SX/LX/SFP

Console

1 x DB9 RS-232

Alarm Contact

1 x Relay output, current capacity 0.6A/30VDC

LED Indicators

Per Unit: Power 1, Power 2

Per Port: Link/Activity (Green)

+ Technology

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x Full duplex and flow control

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1w RSTP

IEEE 802.1x PNAC

Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

Packet Buffer Memory

12M bits

Processing Type

Store-and-Forward

Auto-negotiation

Half-duplex back-pressure and IEEE 802.3x Full-duplex flow control

Auto MDI/MDIX

Address Table Size

16K MAC Addresses

+ Power

Input

12-48VDC Redundant (Terminal block)

Power Consumption

17.28W Max. 1.44A@12VDC, 0.72A@24VDC

Protection

Reverse Polarity Protection

+ Physical

Casing Material
Aluminum

IP Rating
IP30

Dimensions
72 x 140 x 170mm (W x D x H)
2.8" x 5.5" x 6.7"

Weight
1.4kg (3.09lbs)

Installation Type
DIN-rail mounting

+ Environmental

Operating Temp.
-40 to 75°C (-40 to 167°F)
Tested @ -40 to 85°C (-40 to 185°F)

Storage Temp.
-45 to 85°C (-49 to 185°F)

Relative Humidity
5% to 95% (non-condensing)

+ Regulatory

ISO
Manufactured in ISO-9001 facility

EMI
FCC Part 15B Class A
VCCI Class A
EN 61000-6-4
EN 61000-3-2
EN 61000-3-3

EMS
EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic Field)

Safety
UL 61010

Vibration
IEC 60068-2-6 Fc

Shock
IEC 60068-2-27 Ea

Free Fall
FED STD 101C Method 5007.1

Industrial Compliance
IEC 61850-3/IEEE 1613
NEMA TS2

+ Warranty

Length
Limited Lifetime


Details
www.etherwan.com/support/warranty-policy

+ What's Included

Device
Ethernet Switch


Cables

產品尺寸圖

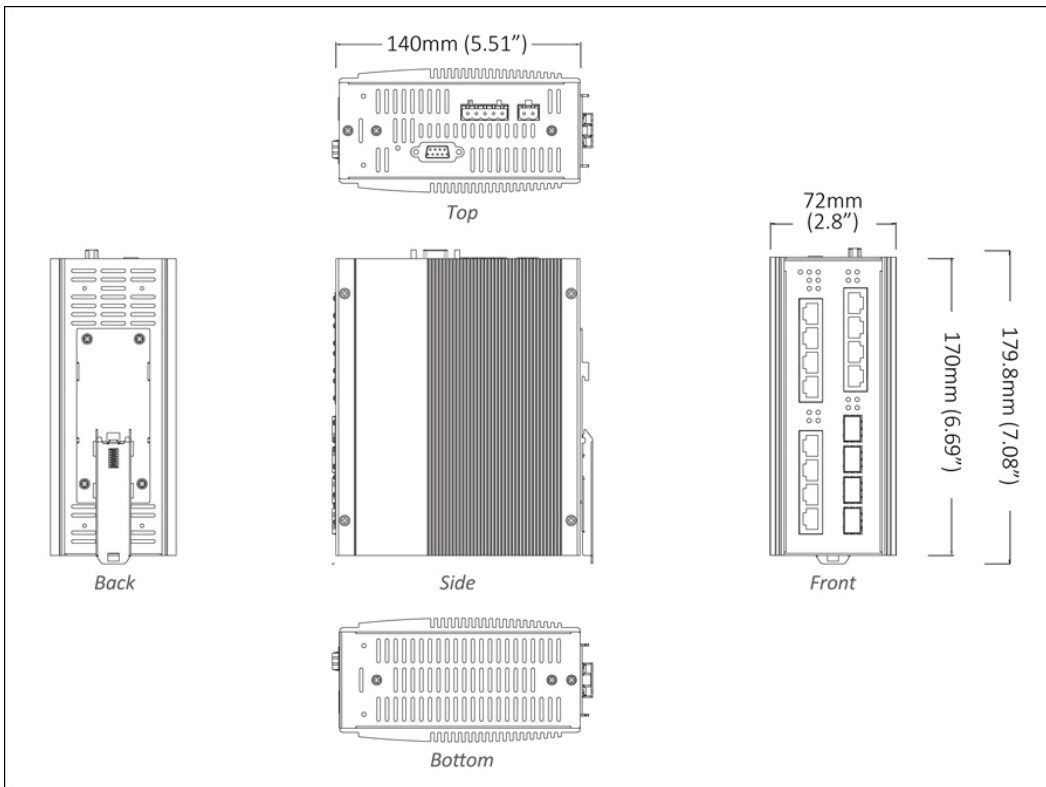

管理軟體

Network Management [eVue™ Network Configuration and Monitoring Tool](#)
 Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

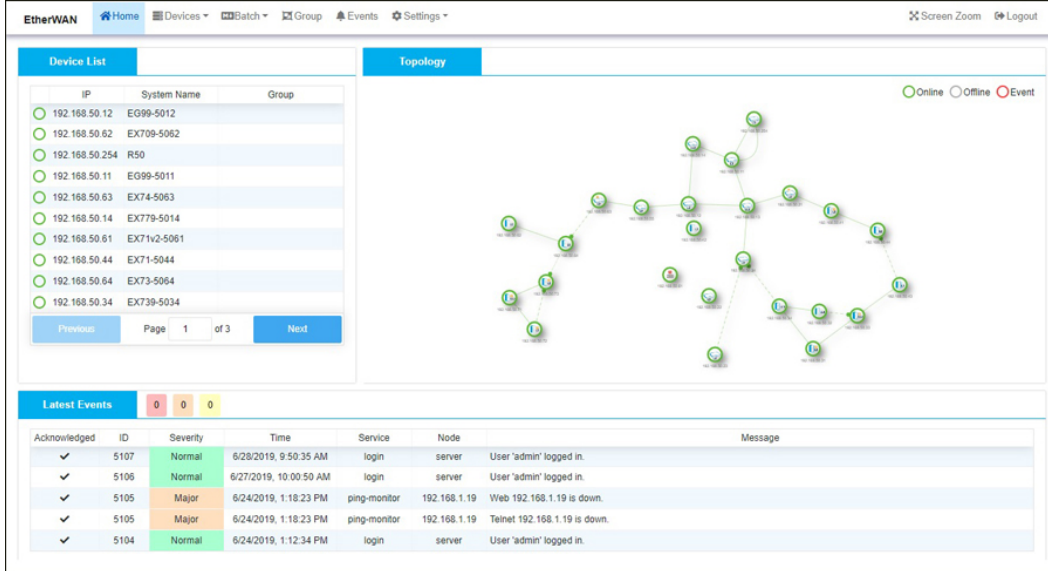

The screenshot shows the EtherWAN management interface. It features a navigation menu at the top with options like Home, Devices, Batch, Group, Events, and Settings. The main content area is divided into two sections: 'Device List' and 'Topology'.


Device List: A table listing network devices with columns for IP, System Name, and Group. The devices listed are:

IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

Topology: A network diagram showing interconnected devices represented by icons. A legend indicates Online (green circle), Offline (grey circle), and Event (red circle).

Latest Events: A table showing recent system events:

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/28/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Telnet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

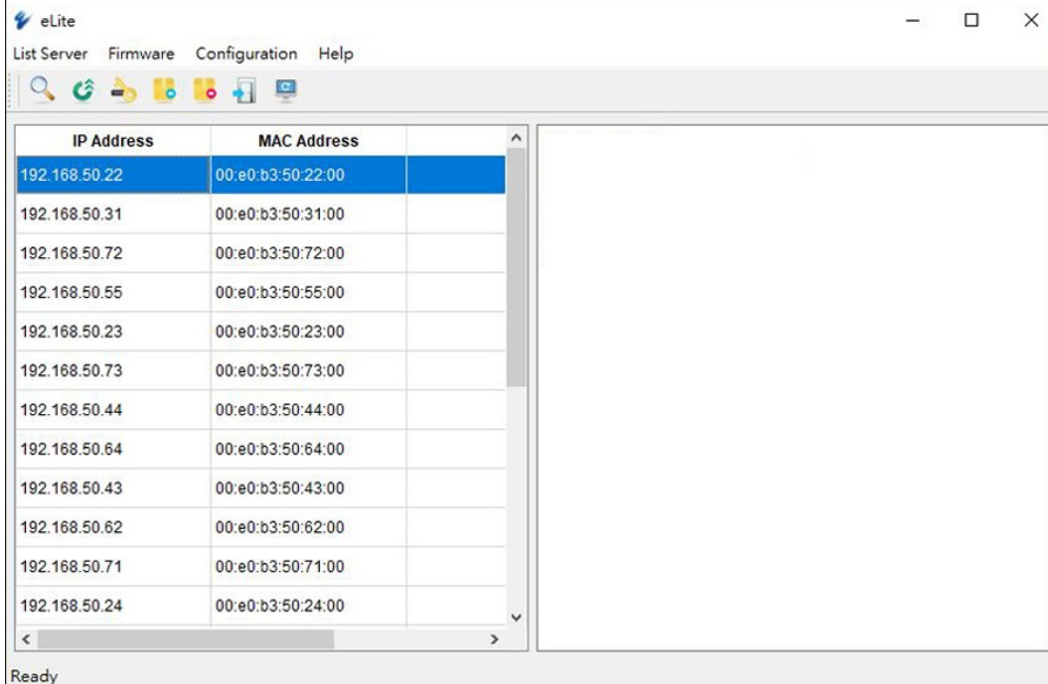

The screenshot shows the eLite network discovery tool interface. It has a menu bar with 'List Server', 'Firmware', 'Configuration', and 'Help'. Below the menu is a toolbar with various icons. The main area displays a table of discovered devices:

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

The status bar at the bottom indicates 'Ready'.

訂購型號

+ Model

EX73931-0VB	12-Port 10/100/1000BASE-TX + 4-port Gigabit SFP
EX73921-0VB	8-Port 10/100/1000BASE-TX + 4-Port Gigabit SFP
EX73921-0XB	8-Port 10/100/1000BASE-TX + 4-Port Gigabit Fiber

* DIN-Rail mounting kit included.

+ Gigabit Fiber Options (X)

3	1000BASE-SX (SC) - 550m
4	1000BASE-SX (SC) - 2Km
5	1000BASE-SX (ST) - 550m
A	1000BASE-LX (SC) - 10Km
B	1000BASE-LX (SC) - 20Km
R	1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
S	1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km

* More Gigabit options are also available upon request.

+ Accessories

Hardened Gigabit SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/products/din-rail-power-supply (*)
*Recommended Power Supply	HDR-30-24 30W 24VDC DIN-Rail Power Supply
EB-232	Configuration Backup and Restoration Tool

