

EX45900 系列

強固級非網管 5 埠10/100/1000BASE (4 x PoE) +1 埠1000BASE-X Gigabit 乙太網路交換器



產品介紹

EX45900系列為強固級非網管PoE鋁軌式安裝乙太網路交換器，4埠支援PoE(IEEE 802.3at)及1個Gigabit光纖埠，支援遠距離傳輸。

EX45900系列屬非網管機型，支援10K Jumbo Frame、full wire Gigabit throughput、QoS，並符合eco-friendly IEEE 802.3az EEE (Energy Efficient Ethernet)標準。支援IEEE 802.3x自動協商功能、全雙工/半雙工流量控制、自動MDI/MDI-X跳線偵測、線性、無阻塞傳輸,無風扇設計。當電源故障或通訊中斷，可經由繼電器輸出警報，幫助現場人員快速診斷並排除異常。

其PoE網路埠，每埠最高可支援30W，總供電瓦數為120W，可廣泛應用於許多終端受電(PD)設備，例如PTZ球型攝影機、無線基地台及軌旁通訊設備等。EX45900系列專為嚴苛戶外環境設計打造，可在-40到75°C寬溫環境下穩定運作，於嚴苛的專案規劃佈局中扮演致勝的關鍵角色。

EtherWAN — "When Connectivity is Crucial."

產品亮點

+ PoE連接

1-4埠支援IEEE 802.3at PoE供電標準，每埠最高可達30W

+ 光纖介面連接

最高支援1個1000BASE-FX埠，彈性搭配SC、ST或SFP組合

+ 符合Energy Efficient Ethernet (EEE)

支援IEEE 802.3az標準

產品規格

+ 技術

標準

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x Full duplex flow control
IEEE 802.3az Energy Efficient Ethernet
IEEE 802.1p Quality of Service (QoS)
IEEE 802.3af/at Power over Ethernet (PoE)

Forward and Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps

緩衝記憶體封包

1M bits

傳輸型式

Store-and-Forward
Auto Negotiation
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto MDI/MDIX

巨大封包

10K bytes

MAC地址表

8192 MAC addresses

+ 電源

輸入電壓

18-57VDC

電力功耗

Device: Max. 7W (Without PoE)
PoE Power Budget: 120W

PoE Technology

Alternative A
Pins 1/2(+), 3/6(-)

Protection

Reverse polarity protection

+ 機構

機殼

金屬材質
IP30

尺寸

30 x 100 x 149mm (W x D x H)
(1.18" x 4" x 5.96")

重量

0.34Kg (0.75lb.)

安裝方式

DIN-Rail

+ 介面**乙太網路埠**

10/100BASE-TX: 5 ports
1000BASE-X: 0 or 1 ports

LED 指示燈號

Per Unit: Power 1 (Green), Power 2 (Green), Alarm (Red)
Per Port: 10/100M (Green), 1000M (Amber)
Per PoE Port: PoE Status (Amber)

DIP Switches

Enable/Disable Port fault alarm
Enable/Disable Broadcast Storm Protection
Enable/Disable Jumbo Frame

Alarm Contact

One relay output with current 1A/250VAC
Supports normal open

+ 環境**工作溫度**

-40 to 75°C (-40 to 167°F);
Tested @ -40 to 85°C (-40 to 185°F)

儲存溫度

-40 to 85°C (-40 to 185°F)

工作濕度

5% to 95% (non-condensing)

+ 通過認證**ISO**

Manufactured in an ISO 9001 facility

Safety

UL 60950
UL 61010 (EX42305/EX42315-V only)

EMI

FCC Part 15B Class A
VCCI Class A
EN 61000-6-4
EN 61000-3-2
EN 61000-3-3
EN 55022 Class A


EMS

- EN 61000-6-2
- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

Environmental Test Compliances

- IEC 60068-2-6 Fc (Vibration)
- IEC 60068-2-27 Ea (Shock)
- FED STD 101C Method 5007.1 (Free fall w/package)

產品尺寸圖

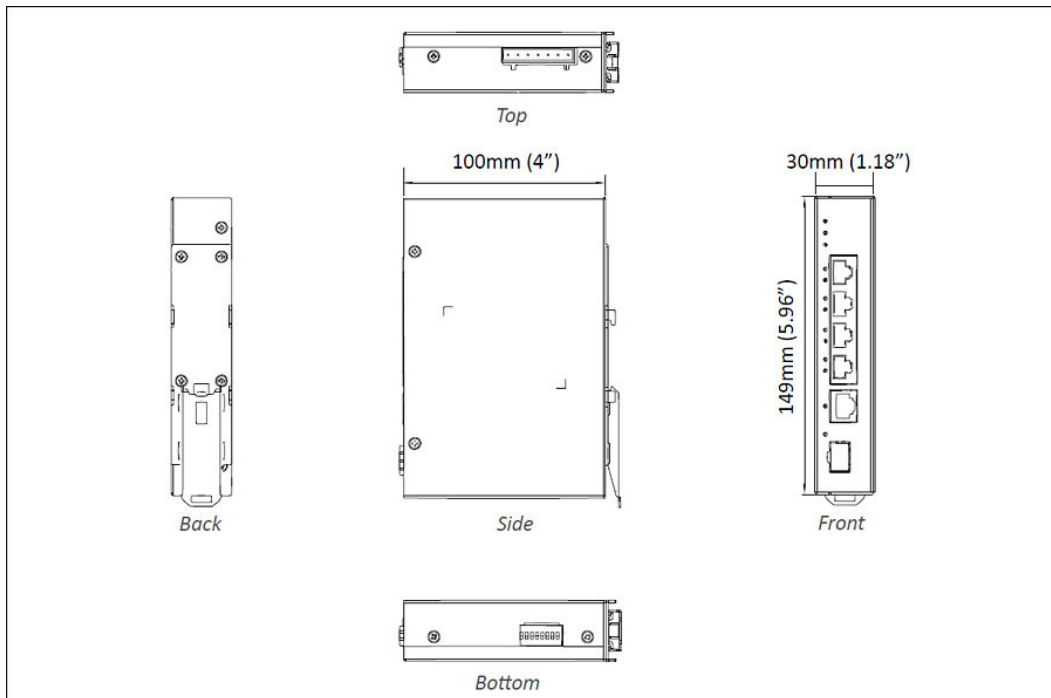

訂購型號

+ Model

EX45905 5-port 10/100/1000BASE-T (4 x PoE) Gigabit Hardened Unmanaged Ethernet Switch

EX45915-V 5-port 10/100/1000BASE-T (4 x PoE) +1-port 1000BASE-X Gigabit Hardened Unmanaged Ethernet Switch

* DIN-Rail mounting kit included.

+ Optional Accessories

NDR-240-48 240W/5A DIN-Rail 48VDC Industrial Power Supply



© EtherWAN Systems, Inc. All rights reserved. 20240830

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.