

## EX48000A 系列

強固級非網管 5埠10/100BASE PoE (4 x PoE) 乙太網路交換器



### 產品介紹

本產品自2020年8月28日起停產。請點選 [此處](#) 尋找替代產品。

EtherWAN's EX48000A Series provides a hardened 5-port switching platform supporting IEEE802.3af Power over Ethernet, high performance switching with robust features required for mission-critical and harsh environments where sustained connectivity is crucial.

The EX48000A Series is equipped with 4 10/100BASE-TX PoE ports, in combination with one 100FX Fiber option.

The IEEE802.3af PoE ports provide up to 15.4W/port with a total power budget of 61.6W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements.

The EX48000A Series is designed to operate at -40°C to 75°C in harsh environments, where high ESD, shock, and vibration may be present.

EtherWAN — "When Connectivity is Crucial."

## 產品亮點

### Hardened Grade

- » Supports -40°C to 75°C (-40°F to 167°F) operating temperature

### PoE Connectivity

- » Port 1 to 4 supports IEEE802.3af Power over Ethernet

### Fiber Connectivity

- » Up to one 100BASE-FX ports with SC and ST options

## 產品規格

### Technology

#### Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3af Power over Ethernet
- IEEE 802.3x Full duplex and flow control

#### Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

#### Packet Buffer Memory

- 512K bits

#### Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

#### Address Table Size

- 1024 MAC addresses
- 

### Power

#### Input

- Redundant power inputs:  
Terminal Block: 47-57VDC  
DC Jack: 47-57VDC

#### Power Consumption

- Device: Max. 10W (without PoE)
- PoE Power Budget (depends on power input): 61.6W Max.

#### PoE Technology

- Alternative B

Pins 7/8(-), 4/5(+)

### **PoE Power Output**

- Port 1 to 4
- IEEE 802.3af: up to 15.4W/port, 47-55VDC, 350mA Max.

### **Protection**

- Reverse polarity protection
  - Overload current protection
- 

## Mechanical

### **Casing**

- Metal Case
- IP30

### **Dimensions**

- 200 x 134.3 x 35mm (W x D x H)  
(7.87" x 5.29" x 1.38")

### **Weight**

- 0.8Kg (1.76lbs.)

### **Installation**

- Desktop, Wall, or DIN-Rail mounting
- 

## Interface

### **Ethernet Ports**

- 10/100BASE-TX: 4 or 5 ports
- 100BASE-FX: 0 or 1 port

### **LED Indicators**

- Per Unit: Power 1 (Green), Power 2 (Green), Power 3 (Green), Fault (Red)
- Per Port: Link/Activity (Green)

### **Alarm Contact**

- One relay output with current 1A/250VAC
- 

## Environment

### **Operating Temperature**

- -40 to 75°C (-40 to 167°F)

Tested @ -40 to 85°C (-40 to 185°F)

### **Storage Temperature**

- -40 to 85°C (-40 to 185°F)

### **Ambient Relative Humidity**

- 5% to 95% (non-condensing)
- 

## **Regulatory Approvals**

### **ISO**

- Manufactured in an ISO 9001 facility

### **EMI**

FCC Part 15B Class A

VCCI Class A

EN 61000-3-2

EN 61000-3-3

EN 61000-6-4

EN 55022 Class A

### **EMS**

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated FRI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

### **Environmental Test Compliances**


IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

---

## 產品尺寸圖

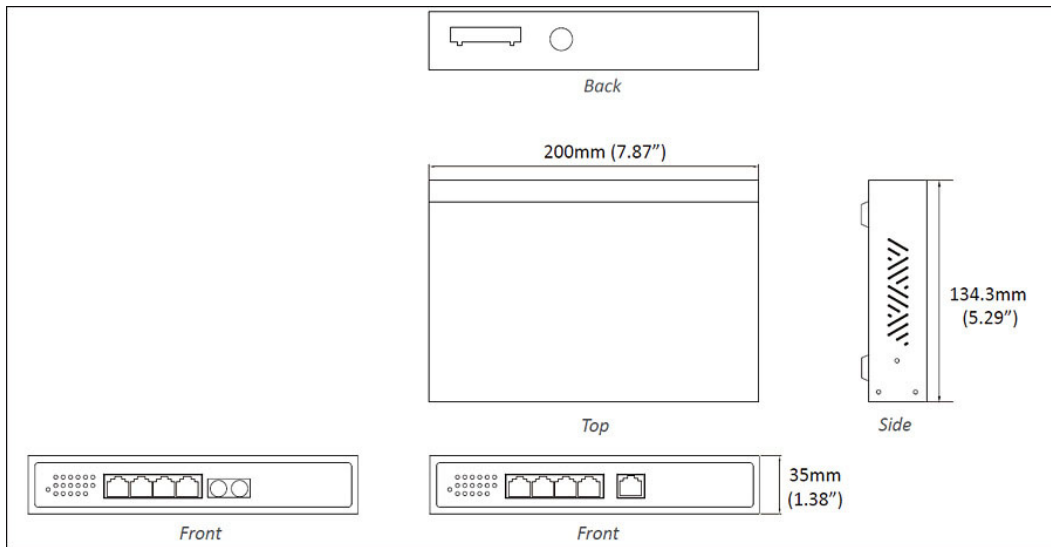

## 訂購型號

### 型號

EX48050A-00B	5-port 10/100BASE-TX PoE Hardened Unmanaged Ethernet Switch
EX48041A-X0B	4-port 10/100BASE-TX +1-port 100BASE-FX PoE Hardened Unmanaged Ethernet Switch

\* DIN-Rail mounting kit included.

### 100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
7	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
8	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
9	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
Q	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
R	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
S	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

\* More 100FX Fiber options also available upon request.

### Optional Accessories

KD-AA78000X	DIN-Rail Mounting Kit
EDR-120-48	120W/2.5A DIN-Rail 48VDC Industrial Power Supply
NDR-240-48	240W/5A DIN-Rail 48VDC Industrial Power Supply
EXGS-120A-48	Power Supply 120W 48VDC with Latch



© EtherWAN Systems, Inc. All rights reserved. 20220721

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.