

EX77900 Series

Hardened Managed 24-port Gigabit and 4-port 10G SFP+ Ethernet Switch



Spotlight

+ Hardened Grade

- Wide operating temperature range for extreme environments
- Fanless and ruggedized housing
- High shock and electric noise immunity

+ 10GbE Connectivity

- Four 10G SFP+ for connecting the switch to the core network

+ L2/L3 Routing Features

- Supports static route, RIP v1/v2 and OSPF
- Maximum number of routes in hardware: 64 entries
- Supports Virtual Router Redundancy Protocol (VRRP)

Overview

[When should you use an Industrial Layer 3 switch?](#)

EtherWAN's EX77900 Series provides a Hardened Full-Gigabit Managed 28-port switching platform that combines the advantages of Layer 3 routing protocols with robust management features and hardened specifications. With support for static routing, Routing Information Protocol (RIP) V1/V2, and Virtual Router Redundancy Protocol (VRRP), these switches deliver outstanding flexibility and security in a high performance and cost-effective package.

The EX77900 Series is equipped with twenty-eight gigabit ports, or a combination of twenty-four Gigabit copper ports and four 10G SFP+ for connecting the switch to the core network. Mountable on a 1U rack, the switches are equipped with EtherWAN's Alpha-Ring self-healing technology, providing less than 15ms fault recovery time making it ideal for applications intolerant to interruption.

A broad range of management features and options includes port security, IGMP snooping, port-based VLAN, GARP protocols, link aggregation and ACL, via web browser, telnet, SSH, SNMP, RMON, TFTP, and RS-232 console interfaces. With the hardened specifications, the EX77900 Series is designed to operate at -40 to 75°C in harsh environments, and is IEC 61850 & IEEE 1613 compliant, capable of operating under high EMI environments, making it an ideal choice for mission-critical applications.

EtherWAN — "When Connectivity is Crucial."

Features

Management

- » Interface
 - CLI, Telnet and Web Browser
 - SNMP v1/v2c/v3
 - » Firmware and configuration upgrade and backup via TFTP
 - » Supports DHCP Server/Client
 - » RMON (Remote Monitoring)
 - » Port mirroring: TX/RX and both
 - » NTP (Network Time Protocol) time synchronization
 - » IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
 - » IPv4/IPv6
-

Security

- » MAC address filtering
 - » Enable/Disable port
 - » Storm control (Broadcast and multicast types)
 - » IEEE 802.1x LAN access control
 - » Remote authentication through RADIUS and TACACS+
 - » SSH for CLI and Telnet security
 - » SSL for web security
 - » ACL
-

Quality of Service (QoS)

- » Priority Queues: 4 queues per port
 - » Traffic classification based on IEEE 802.1p CoS, DSCP, WRR (Weighted Round Robin) and strict mode
 - » Rate Limiting (Ingress/Egress)
-

Layer 2 Features

- » Auto-negotiation for port speed and duplex mode
- » Flow Control
- » IEEE 802.3x full duplex mode
 - Back-Pressure half duplex mode
- » Redundant Protocol

- IEEE 802.1D Spanning Tree Protocol (STP)
 - IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
 - IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
 - EtherWAN's Alpha-Ring network fault recovery (<15ms) and Alpha-Chain
- » VLANs
- IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
 - GVRP (GARP VLAN Registration Protocol)
 - GMRP (GARP Multicast Registration Protocol)
- » Link Aggregation
- Static Trunk (4 groups, support MAC base)
 - IEEE 802.3ad Link Aggregation Control Protocol
- » IGMP Snooping
- IGMP Snooping v1/v2/v3
-

Layer 3 Features

- » Routing Protocols
- Maximum number of routes in hardware:64 entries
 - Static routing
 - RIP v1/v2
 - OSPF v2
- » Routing Redundancy
- VRRP
-

Specifications

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x Full duplex and flow control
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1w RSTP
IEEE 802.1x Port-based Network Access Control

Forward and Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps
14,880,952pps for 10Gbps

Packet Buffer Memory

12M bits

Processing Type

Store-and-Forward
Auto Negotiation
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto MDI/MDIX

Address Table Size

16K MAC addresses

+ Interface

Ethernet Port

10/100/1000BASE-TX: 16 or 24 ports
100/1000BASE-SX/LX/BX/SFP: 8 ports
10G SFP+: 4 ports

Console Port

One DB9 RS-232 port

USB Port

One USB Port (Type A connector)

Alarm Contact

One relay output with current 0.6A/30VDC

LED Indicators

Per Unit: Power 1, Power 2, Alarm
Per Port: Link/Activity (Green)

+ Environment

Operating Temperature

-40 to 75°C (-40 to 167°F)

Storage Temperature

-45 to 85°C (-49 to 185°F)

Ambient Relative Humidity

5% to 95% (non-condensing)

+ Power

Input

Power input can be configured as:

- ±48VDC (Terminal Block)
- 88-300VDC or 100-240VAC (Terminal Block)
- 100–240VAC (AC Inlet)
- ±48VDC Redundant (Terminal Block)
- 88-300VDC or 100-240VAC Redundant (Terminal Block)
- 100–240VAC Redundant (AC Inlet)

Power Consumption

31.08W

+ Mechanical

Casing

Metal Case

IP30

Dimensions

430 x 375 x 44.2mm (W x D x H)
(16.9" x 14.7" x 1.74")

Weight

5.27kg

Installation

Rack mounting

+ Regulatory Approvals

ISO

Manufactured in an ISO 9001 facility

Safety

- UL 62368

EMI

- FCC Part 15B Class A
- VCCI Class A
- EN 61000-6-4
- EN 61000-3-2
- EN 61000-3-3

EMS

- EN 61000-6-2
- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)


Environmental Test Compliance

- IEC 60068-2-6 Fc (Vibration Resistance)
- IEC 60068-2-27 Ea (Shock)
- FED STD 101C Method 5007.1 (Free fall w/package)


Industrial Compliance

- IEC 61850-3/IEEE 1613
- EN 50121-4
- NEMA TS2

Application

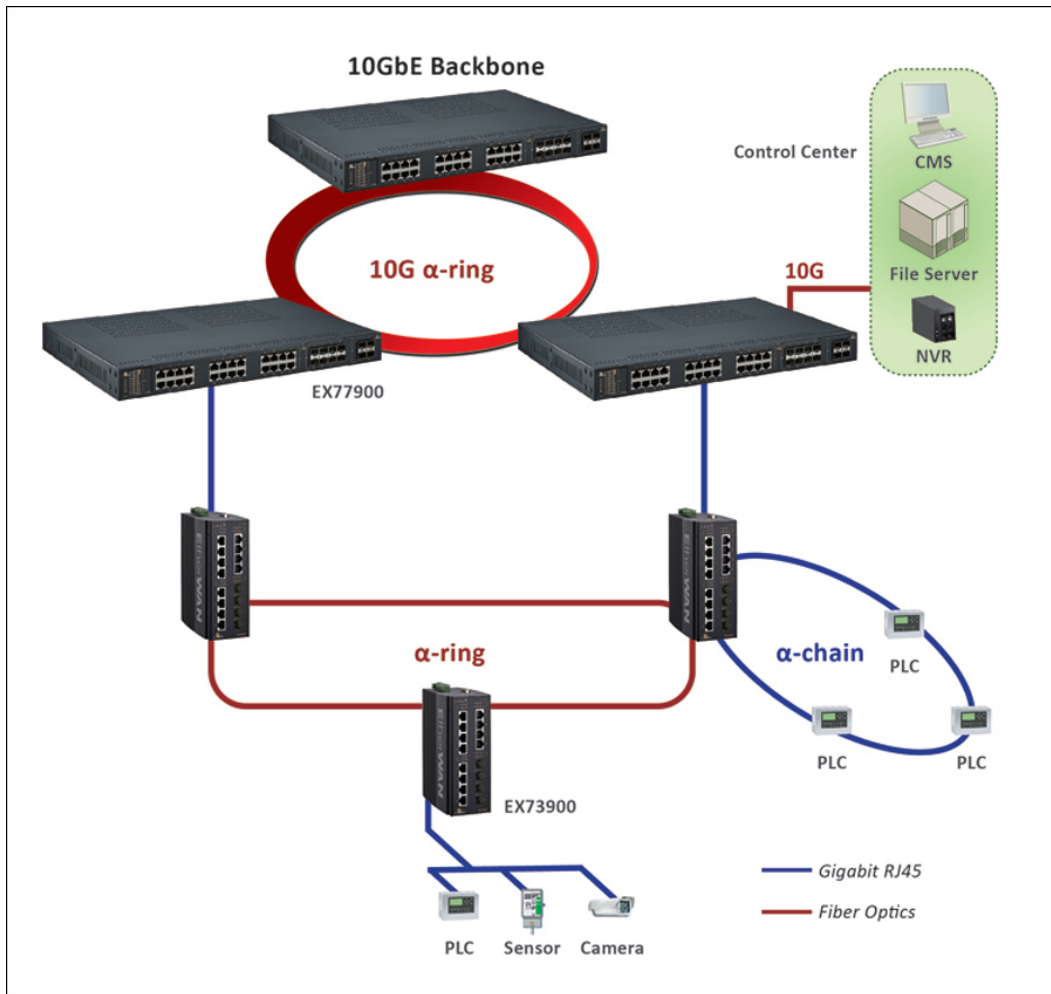

Dimensions

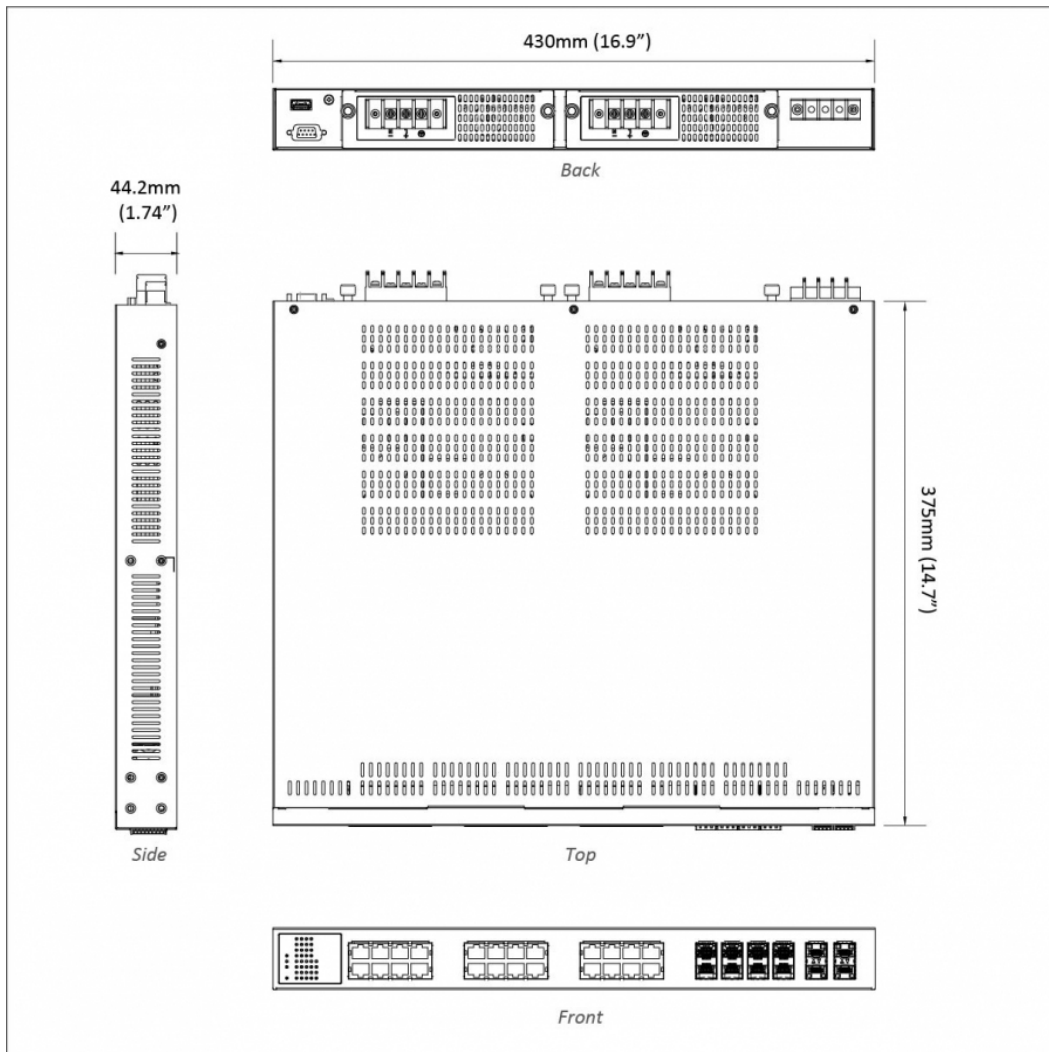

Ordering Info

+ Model

| | |
|--------------------|--|
| EX77964-8VZ | 16-port 10/100/1000BASE-TX +8-port 100/1000BASE SFP Combo +4-port 1G/10G SFP+ Hardened Managed Ethernet Switch |
|--------------------|--|

+ Power Input Interface (Z)

| | |
|-----------|--|
| T | ±48VDC (Terminal Block) |
| W | 88-300VDC or 100-240VAC (Terminal Block) |
| C | 100-240VAC (AC Inlet) |
| TR | ±48VDC Redundant (Terminal Block) |
| WR | 88-300VDC or 100-240VAC Redundant (Terminal Block) |
| CR | 100-240VAC Redundant (AC Inlet) |

+ Optional Accessory

| | |
|---------------|---|
| EB-232 | Configuration Backup and Restoration Tool for EtherWAN switch with firmware 2.01.1 or above |
|---------------|---|

