

EW75200-1308

Hardened IP67 Outdoor Wireless Access Point/Bridge



Overview

The eWAV EW75200-1308 is a hardened IP67 outdoor wireless access points (WAP) providing high speed wireless connectivity for harsh and demanding environments. Comprised of high-power, long-range IEEE 802.11ac MIMO wireless radios with gigabit IEEE 802.3at PoE connectivity, the series is hardened against extreme temperatures and water ingress. eWAV delivers the power and range (up to 20 miles) to wirelessly connect remote networks or extend existing networks in an efficient and cost-effective way. The EW75200-1308 supports two 5GHz 802.11a/n/ac Radios for long-distance Point-to-Point/Point-to-Multi-Point data transmission and local device access such as laptops, wireless IP cameras, or mobile devices. Maximum transmission speeds are up to 866Mbps on each 5GHz radio.

EtherWAN — "When Connectivity is Crucial."

Highlights

+ High Bandwidth Wireless Connectivity

Designed for Point-to-Point and Point-to-Multipoint wireless backhaul applications
IEEE 802.11a/n/ac providing high throughput data transmission on 5GHz up to 866Mbps
1 x dual polarization, high gain panel antenna
2 x high gain omnidirectional antennas

+ Hardened Grade with IP67 Protection

Wide operating temperature range for extreme environments
Fanless and ruggedized outdoor IP67 enclosure

+ Comprehensive and Advanced Software Features

Static routing, RIP v1/v2 and OSPF v2
Built in Stateful Firewall and RADIUS for security control
RF strength LEDs and Bandwidth Tester to ease installation effort

Software Features

+ Interface

Web Browser

SNMP v1/v2/v3

+ Management

Firmware and configuration upgrade and backup via Web Browser

Supports DHCP Server/Client/Relay

DNS cache and Web Proxy

System health monitoring including temperature and voltage

Local system log, e-mail and remote log service

Sntp Client

Useful tools such as Bandwidth Test, E-mail, Ping, Traceroute, Packet Sniffer and Traffic Generator

+ Wireless

Encryption: WPA, WPA2, WEP, AES

Dynamic Frequency selection

Proprietary Nstreme and Nv2 protocols for long distance transmission

+ Routing

Static routing, RIP v1/v2 and OSPF v2

Bidirectional Forwarding Detection

Prefix List to filter and control the routing

table

+ Security

RADIUS client

Powerful Firewall

- Stateful packet inspection
- Layer-7 protocol detection
- Peer-to-peer protocols filtering

Traffic classification by:

1. Source MAC address
2. IP addresses (Network or List) and address types (Broadcast, Local, Multicast, Unicast)
3. Port or port range
4. IP protocols
5. Protocol options (ICMP type and code fields, TCP flags, IP options and MSS)
6. Interface the packet arrived from or left through
7. Internal flow and connection marks
8. DSCP byte
9. Packet content
10. Rate at which packets arrive and sequence numbers
11. Packet size
12. Packet arrival time

Hardware Specifications

+ Technology

Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.11a/n/ac Wireless LAN


Performance

- Wireless transmission rate 5GHz:
 - 11a: 108Mbps
 - 11n: 300Mbps
 - 11ac: 866Mbps
- Ethernet data rate:
 - Up to 540Mbps (LAN to wireless 11ac)

Wireless

- RF channels: Non-overlapping
- Frequency range:
 - 5GHz: 5150-5250MHz and 5725-5850MHz
- Channel width:
 - 5GHz: 10MHz, 20MHz, 40MHz, 80MHz
- Data security: 256-bit AES-CCM

Transmit power and receive sensitivity 5GHz

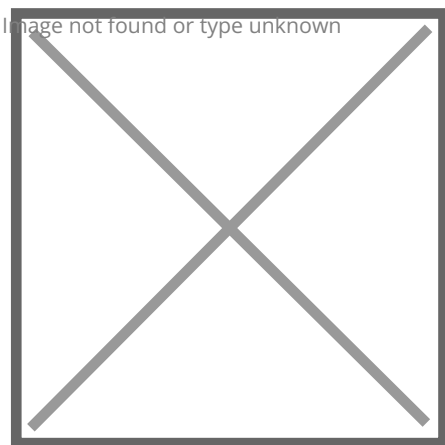

+ Mechanical

Casing

- UV Protected Polystyrene case

+ Power

Input

- PoE 802.3at/bt

Power Consumption


- 17W Max.

+ Interface

Ethernet Port

- 10/100/1000BASE-TX PoE

LED Indicators

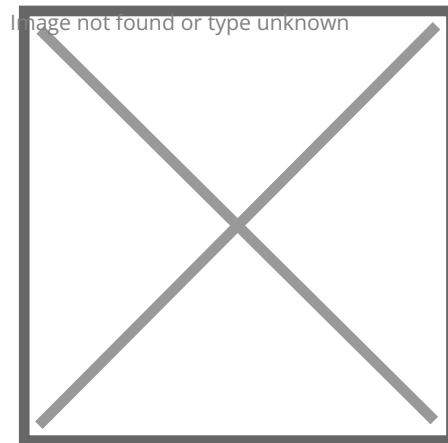

+ Environment

Operating Temperature

- -40 to 75°C (-40 to 167°F)

Storage Temperature

- -45 to 85°C (-49 to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

+ Regulatory Approvals

ISO


- Manufactured in an ISO 9001 facility

EMI

- FCC Part 15B Class A

FCC Part 15C

Application

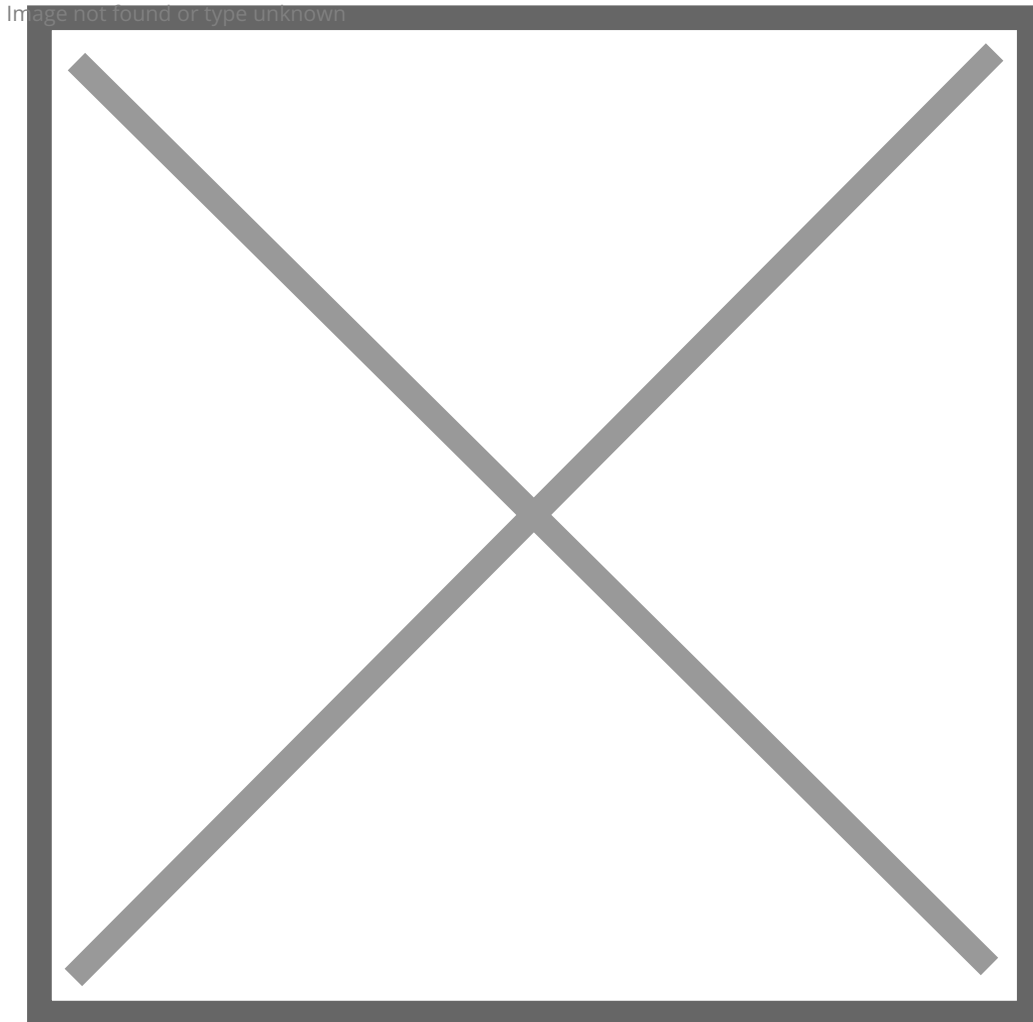

Ordering Info

+ Model

EW75200-1308	Hardened IP67 outdoor wireless access point with 5GHz/19dBi Panel antenna and 5GHz/8dBi Omni antenna
--------------	--

+ Accessories

EW-JPole18	18" Wall Mount J-Pole
Cable 25	25' Shielded Twisted Pair CAT 6 Cable with UV Resistant Coating
Cable 50	
Cable 150	150' Shielded Twisted Pair CAT 6 Cable with UV Resistant Coating
Cable 300	330' Shielded Twisted Pair CAT 6 Cable with UV Resistant Coating



© EtherWAN Systems, Inc. All rights reserved. 20241003

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.