

EL900 Series

Hardened 10/100BASE-TX to 100BASE-FX Media Converter



Overview

The EL900 Series provides media conversion between 10/100BASE-T and 100BASE-SX-LX Fiber. Built specifically for mission-critical applications in harsh environments, the EL900's hardened design features high shock & vibration resistance, electrical noise immunity, wide operating temperature range from -40°C to 75°C, and ruggedized aluminum housing. With triple power inputs, link down alarming, Link-Fault-Pass-Through and a wide range of fiber connectivity options, the EL900 is the ideal media converter for harsh environments.

EtherWAN — "When Connectivity is Crucial."

Spotlight

+ ISA 12.12.01 Certification

Highly qualified for explosive environmental applications and certified by UL with ISA12.12.01 Class I, Division 2 classified for use in hazardous locations

+ Link-Fault-Pass-Through (LFPT)

LFPT function let network operators be aware of network connection status
When fiber link is down, LFPT function will turn down Ethernet port to inform connected device that the link is down and vise versa

+ Wide Operating Temperature

-40°C to 75°C wide operating temperature range design is suitable for installation in outdoor cabinet

Specifications

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX and 100BASE-FX
IEEE 802.3x Full duplex and flow control

Forward and Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps

Packet Buffer Memory

128K bits

Processing Type

Store-and-forward
Auto Negotiation
Half-Duplex back-pressure and IEEE 802.3x Full-Duplex flow control
Auto MDI/MDIX

+ Interface

Ethernet Ports

10/100BASE-TX: 1 ports
100BASE-FX: 1 ports

LED Indicators

Per Unit: Power1, Power2, Alarm
Per 10/100BASE-TX port: Link/Activity, 100, Full-Duplex/Collision, LFPT
Per 100BASE-FX port: Link/Activity, Full-Duplex/Collision

Relay Contact

Dry contact with current 0.6A/30VDC

+ Environment

Operating Temperature

-40 to 75°C (-40 to 167°F)

Storage Temperature

-40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

5% to 95% (non-condensing)

+ Power

Input

10-48VDC (DC Terminal Block)
12VDC (DC Jack) or 24VAC, 0.185A (AC Terminal Block)

Power Consumption

4.32W Max
0.36A@12VDC
0.09A@48VDC

Protection

Overload Current Protection
Reverse Polarity Protection

+ Mechanical

Casing

Aluminum Case
IP30

Dimensions

50 x 110 x 135mm (W x D x H)
(1.97" x 4.33" x 5.31")

Weight

0.8Kg (1.76lbs.)

Installation

DIN-Rail (top hat type 35mm) or panel mounting

+ Regulatory Approvals

ISO

Manufactured in an ISO 9001 facility

Safety

ISA 12.12.01

- Class 1, Division 2 group A, B, C & D for hazardous locations

EMC

FCC Part 15B Class A

VCCI Class A

EN 55022

EN 61000-3-2

EN 61000-3-3

EN 61000-6-3

EMS

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated FRI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

Environmental Test Compliances

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)


FED STD 101C Method 5007.1 (Free fall w/ package)

IEC 60068-2-27 Ea (Shock)

NEMA TS1/2

* Environmental requirements for traffic control equipment

Dimensions

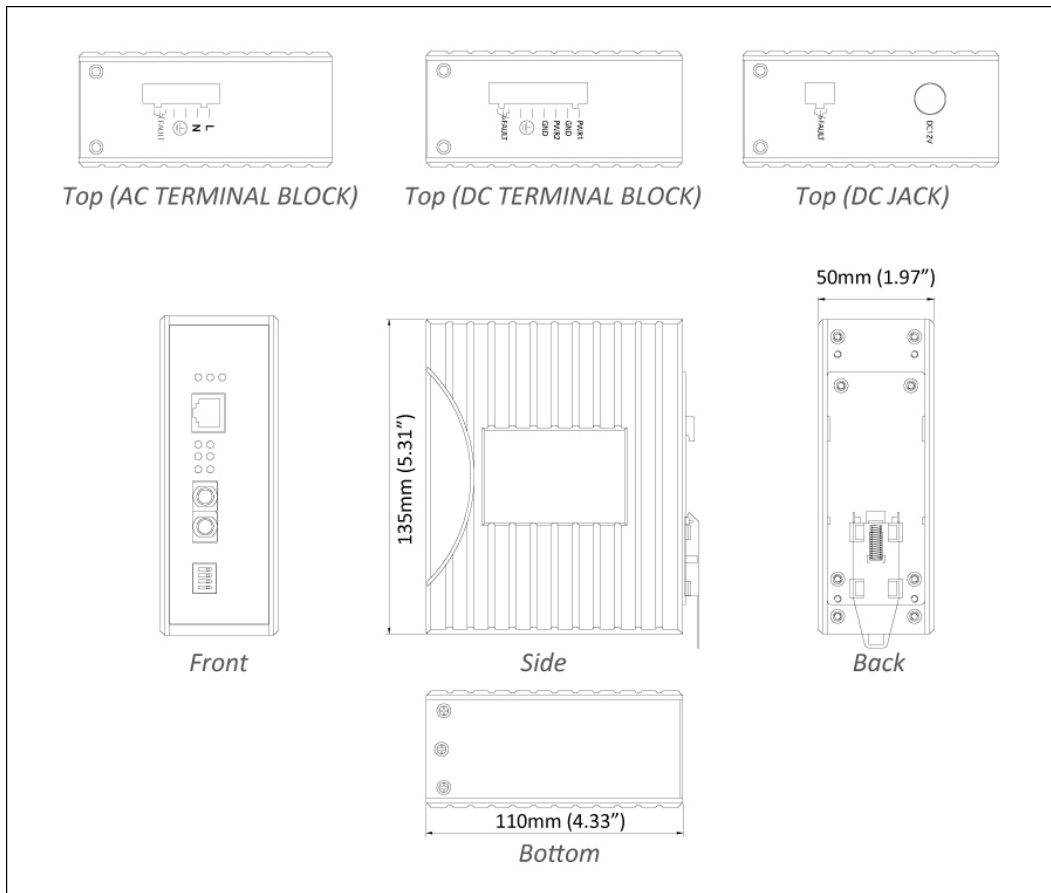

Ordering Info

+ Model

EL900-A-Y-1-P	10/100BASE-TX to 100BASE-FX Hardened Media Converter
----------------------	------------------------------------------------------

* DIN-Rail mounting kit included.

+ 100FX Fiber Options (Y)

B	Multi Mode (SC) - 2Km (1310nm)
C	Multi Mode (ST) - 2Km (1310nm)
D	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
E	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
F	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
G	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
Q	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
R	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
S	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
T	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km
M	Single Mode (ST) - 20Km (1310nm)
N	Single Mode (SC) - 20Km (1310nm)
O	Single Mode (SC) - 40Km (1310nm)

+ Power Connector Options (P)

A	DC Terminal Block
B	DC Jack
C	24VAC Terminal Block

+ Optional Accessories

KP-AA96-480	Panel mounting Kit
HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
EDR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply
EX41-145046-X	Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA
EX41-145044-X	Power Supply 45W 12VDC with Latch (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA



© EtherWAN Systems, Inc. All rights reserved. 20240920

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.