

# EX26262F V2

Managed 24-port Gigabit PoE + 2-port 100/1000 SFP Combo Ethernet Switch



## Overview

EtherWAN's EX26262F is a managed 26-port PoE Ethernet switch platform. Equipped with 24 gigabit PoE ports along with a high total PoE power budget of 450W and 2 gigabit combo RJ45/SFP ports, the EX26262F provides flexibility, speed, and reliability for networks in urban infrastructure, security, and other areas where connectivity is crucial

EtherWAN — "When Connectivity is Crucial."

## Highlights

### + High Bandwidth and Versatility

- 24 10/100/1000BASE-T(X) ports for high bandwidth connections
- 2 combo RJ45/SFP connections for uplink
- Full capacity switching running at full duplex

### + High Power PoE Power Budget

- Maximum PoE power budget of up to 450W
- Provides up to 30W per port for PTZ cameras and other high power devices

### + Management/Security Features

- PoE watchdog monitors status of connected PoE devices
- 802.1x port-based network access control and remote authentication through RADIUS and TACACS+
- Port control and security

### + Support

- Complimentary technical support
- Free firmware upgrades

## Features

### + Interface

CLI, Telnet and Web Browser SNMP v1/v2c/v3

### + Management

Firmware and configuration upgrade and backup via TFTP

Supports DHCP Server/Client

RMON (Remote Monitoring): group 1, 2, 3, 9

Port mirroring: TX/RX and both

NTP (Network Time Protocol) Time

Synchronization

IEEE 802.1ab LLDP (Link Layer Discovery Protocol)

IPv4/IPv6

PoE Watchdog

Virtual Stacking

### + Security

MAC Address Filtering

Enable/Disable Port

Storm Control (Broadcast and Multicast Types)

IEEE802.1x LAN Access Control

Remote Authentication through RADIUS & TACACS+

SSH for CLI and Telnet Security

SSL for Web Security

System Log

ACL

### + Quality of Service (QoS)

Priority Queues: 8 Queues per Port

Traffic Classification Based on IEEE802.1p CoS,

DSCP, WRR, and Strict Mode

Rate Limiting (Ingress/Egress)

### + Layer 2 Features

#### Flow Control

IEEE802.3x full duplex mode

Back-Pressure half duplex mode

#### Redundant Protocol

IEEE802.1D Spanning Tree Protocol (STP)

IEEE802.1w Rapid Spanning Tree Protocol (RSTP)

IEEE802.1s Multiple Spanning Tree Protocol (MSTP)

#### VLANs

Supports up to 4K VLANs simultaneously (128 groups, 4096 VID)

Port-based VLAN

Voice VLAN

#### Link Aggregation

Static trunk (13 groups, 4 ports per group)

IEEE802.3ad Link Aggregation Control Protocol

#### IGMP Snooping

IGMP snooping v1/v2/v3

## Specifications

### + Technology

#### Standards

IEEE 802.3 10BASE-T  
IEEE 802.3u 100BASE-T  
IEEE 802.3ab 1000BASE-T  
IEEE 802.3ad LACP  
IEEE 802.3af PoE  
IEEE 802.3at PoE+  
IEEE 802.3x Full duplex and flow control  
IEEE 802.1D STP  
IEEE 802.1p QoS  
IEEE 802.1Q Tag VLANs  
IEEE 802.1s MSTP  
IEEE 802.1w RSTP  
IEEE 802.1x Port-based Network Access Control  
IEEE 802.1ab LLDP  
G.0832 ERPS

#### Forward/Filtering Rate

14,800pps for 10Mbps  
148,810pps for 100Mbps  
1,488,100pps for 1000Mbps  
14,881,000pps for 10gbps

#### Packet Buffer Memory

32M Bits

#### Processing Type

Store-and-forward  
Auto-negotiation  
Half-duplex back-pressure and full-duplex flow control and IEEE 802.3x full-duplex flow control  
Auto MDI/MDIX

#### Address Table Size

32K MAC Addresses

#### Switching Fabric

176Gbps

#### Forwarding Rate

130.94Mpps

#### Jumbo Framze Size

9.6KB

### + Interface

#### Ethernet

10/100/1000BASE-T(X): 24 ports  
100/1000 Combo (RJ45 or SFP): 2 ports

#### Console

Two Ports  
1 x RJ45

#### LED Indicators

Per Unit: Power  
Per Port: Link/Activity, PoE

### + Power

#### Input

100-240VAC

#### Power Consumption

37W Max (without PoE) w/ PoE power budget of 450W  
up to 30W/port Poe power output

### + Physical

#### Casing Material

Aluminum

#### Dimensions

EX26262F: 17.3" x 12.99" x 1.73" (W x D x H)

(440 x 330 x 44mm)

#### Weight

10.56lbs (5.5kg)

#### Installation Type

Rack Mounting

## + Environmental

**Operating Temp.**  
32 to 122°F(0 to 50°C)

**Storage Temp.**  
-10 to 158°F (-10 to 70°C)

**Relative Humidity**  
10% to 90% (non-condensing)

## + Regulatory

**EMI**  
FCC Part 15B  
VCCI Class A  
CE Mark Class A

**Safety**  
UL 62368-1

## + Warranty

**Length**  
3 Years

**Details**  
[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)


## + What's Included

**Device**  
Ethernet Switch


**Accessories**  
AC Power Cord  
Rack Mounting Kit

**Documentation**  
Quick install guide

## Application

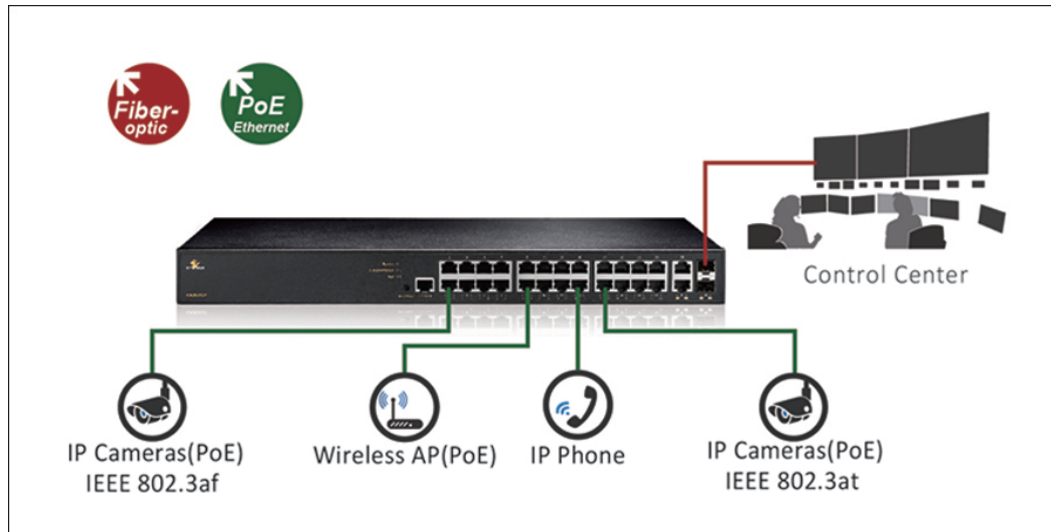

## Dimensions

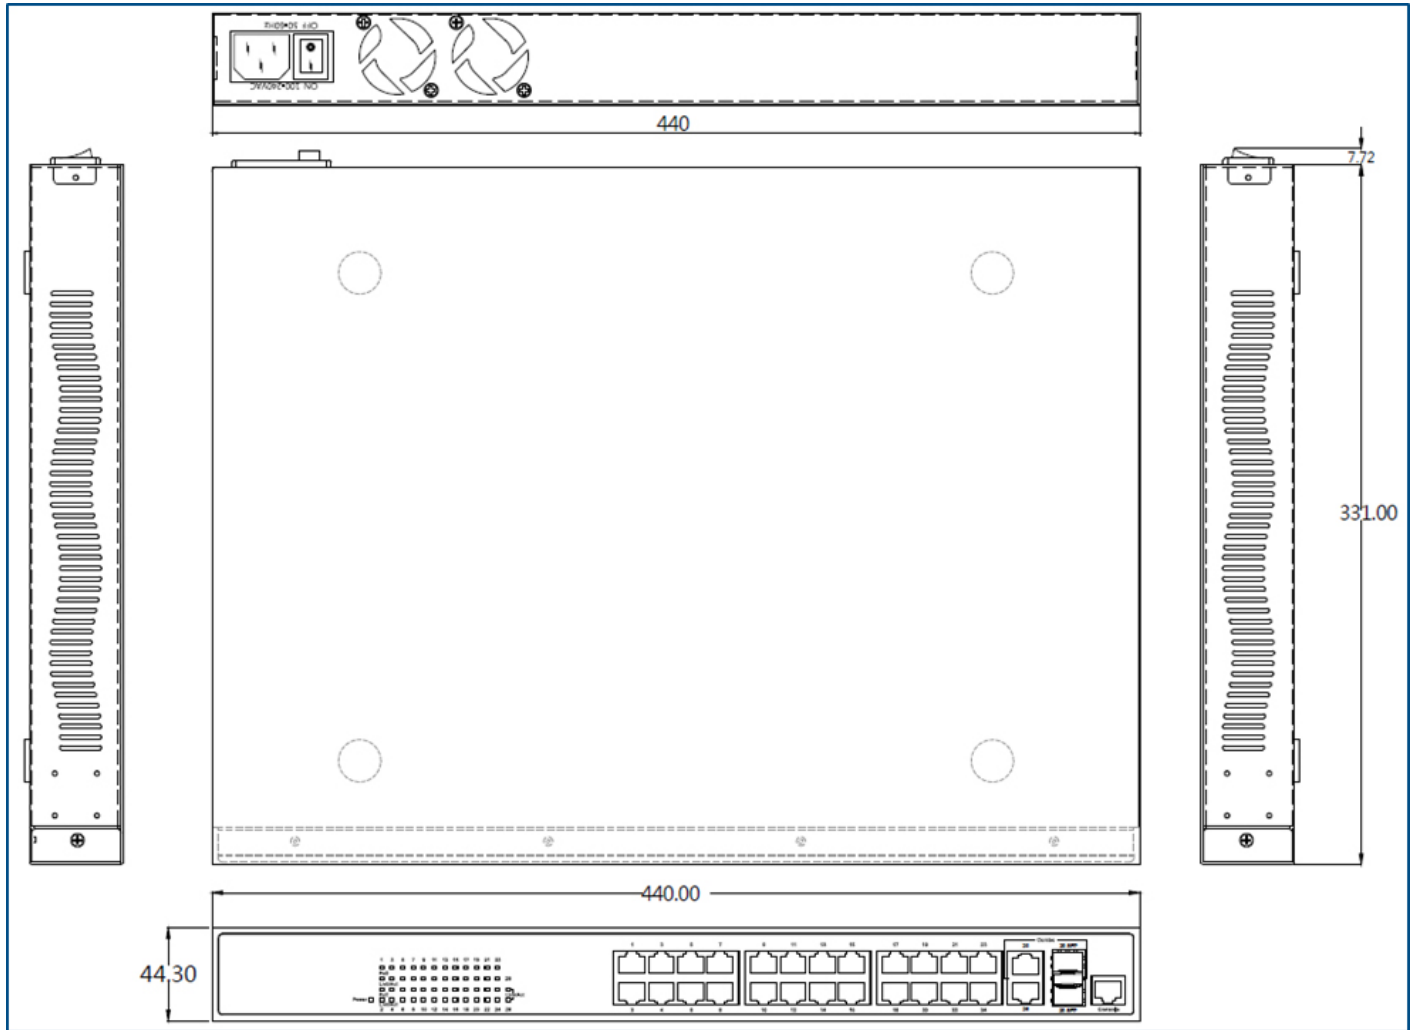

## Ordering Info

### + Model

**EX26262F** Managed 24-port Gigabit PoE + 2-port 100/1000 SFP Combo Ethernet Switch

\* Rack mounting kit included

