

INJ90BT-24

Hardened Gigabit 90W PoE Injector

image not found or type unknown



Overview

EtherWAN's INJ90BT-24 is a compact hardened DIN-rail mounted PoE injector. Using the latest IEEE 802.3bt PoE technology providing up to 90W power output, the INJ90BT-24 provides the solution required to integrate remote PoE devices such as IP cameras, LED lights, wireless access point, and other network devices into non-PoE networks for reliable operation even in harsh environments.

EtherWAN — "When Connectivity is Crucial."

Highlights

+ High-Power PoE (Power over Ethernet)

High power output using the latest IEEE 802.3bt technology
Up to 90W output for various security, LED lighting, and other applications
Backward compatible with 802.3af and 802.3at devices

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
Fanless operation
High impact, thermal shock, and electrical noise resistance

+ Support

Complimentary Technical Support
In-person training and free online training courses available
Limited Lifetime Warranty

Specifications

+ Interface

Ethernet

- 1 x 10/100/1000BASE-T(X), connection to network
- 1 x 10/100/1000BASE-T(X), PoE connection to device

LED Indicators

- Power detected: Power 1, Power 2
- PoE: On (Active), Off (Idle)

+ Technology

Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3af PoE
- IEEE 802.3at PoE+
- IEEE 802.3bt 4PPoE
- Compatible with 95W PoH (Power over HDBaseT) standard

+ Power

Input

- 24-56VDC Redundant (Terminal block)

Power Consumption

- 1W max@48VDC, without PoE

PoE Power Output

- 90W@56VDC Input
- 60W@24VDC Input

Protection

- Reverse Polarity Protection
- Current Overload Protection

+ Physical

Casing Material

- Aluminum

IP Rating

- IP30

Dimensions

- 32 x 81.5 x 103.5mm (W x D x H)
1.26" x 3.21" x 4.07"

Weight

- 1.5lbs (0.68kg)

Installation Type

- DIN-rail or wall mounting

+ Environmental

Operating Temp.

- -40 to 167°F (-40 to 75°C)

Storage Temp.

- -49 to 185°F (-40 to 85°C)

Relative Humidity

- 5% to 95% (non-condensing)

MTBF

- >500,000 hours@50°C

+ Regulatory

ISO

- Manufactured in ISO-9001 facility

EMI

- FCC Part 15B Class A
- EN 55032
- EN 55024

EMS

- EN 61000-4-2 (ESD)
- EN 61000-4-4 (Burst)
- EN 61000-4-5 (Surge)

Safety

- UL 60950-1

Vibration

- IEC 60068-2-6

Shock

- IEC 60068-2-27

Free Fall

- EN 60068-2-32

+ Warranty

Length

- Limited Lifetime

Details

- www.etherwan.com/support/warranty-policy

+ What's Included

Device

- Injector


Installation

- Mounting brackets, screws, 4-pin terminal block

Documentation

- Quick install guide

Dimensions

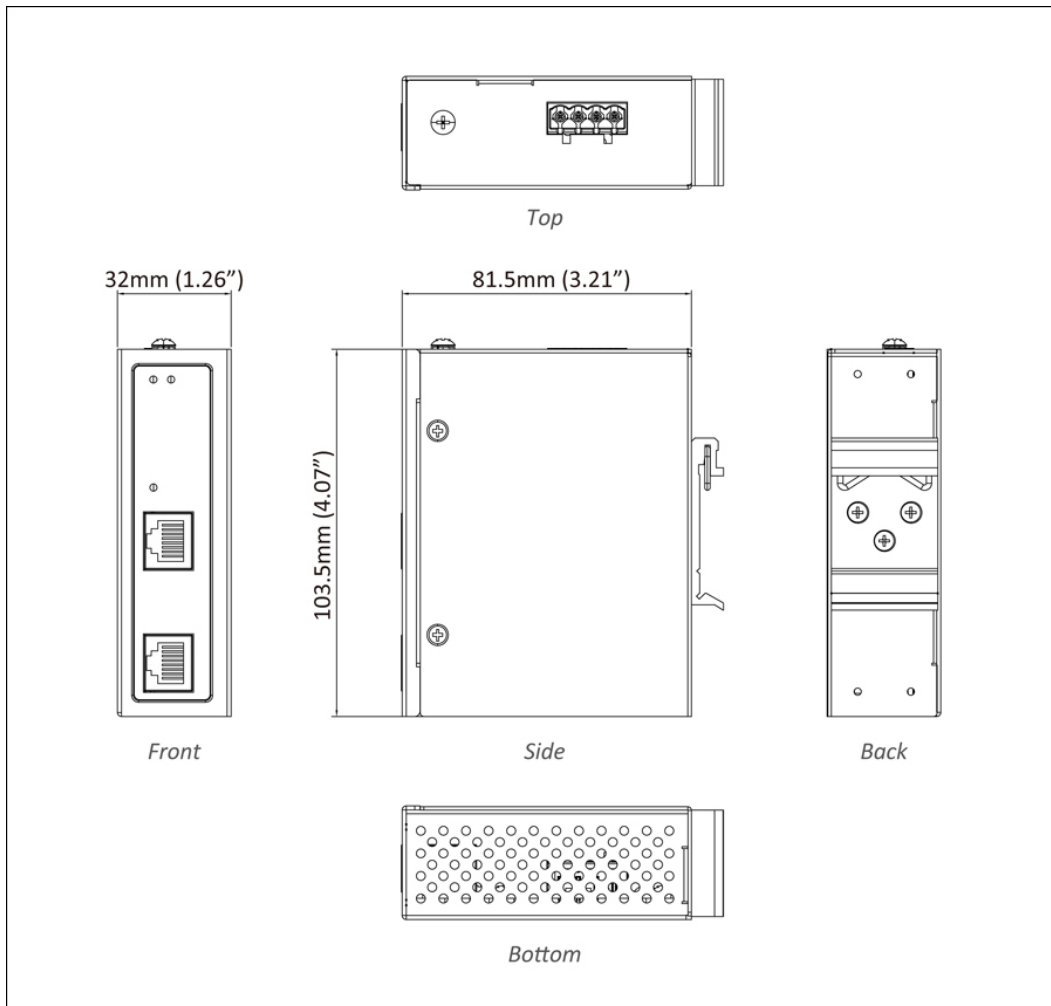

Ordering Info

+ Model

INJ90BT-24	10/100/1000BASE-T PoE Injector, 90W 802.3bt
------------	---

+ Accessories

DIN-Rail Power Supplies	www.etherwan.com/products/din-rail-power-supply
-------------------------	--



© EtherWAN Systems, Inc. All rights reserved. 20241001

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.