

# EasyPoE® Box Series

NEMA-Rated Indoor/Outdoor Enclosure with Integrated PoE Switch



## Overview

EtherWAN's EasyPoE® Box Series is an integrated solution that combines a managed PoE switch, splice tray, power supply, and a DIN-rail for accessories, all in a single, secure, NEMA-rated cabinet enclosure. Equipped with up to 4 gigabit PoE ports that provide from 15W up to 90W output per port using the latest IEEE 802.3bt technology and 2 uplink ports, the smart camera box series provides the power, time-saving design, and convenience to support a wide variety of applications including surveillance, LED lighting, and other networking applications.

EtherWAN — "When Connectivity is Crucial."

## Highlights

### + NEMA-Rated Indoor/Outdoor Design for Non-Ventilated & Harsh Environments

- Wide operating temperature -40 to 70°C (-40 to 158°F)
- Fanless design
- Weather-resistant, anti-corrosion, and vandal-resistant design

### + Time/Cost Saving Features

- Integrated splicing tray for safe fiber connection storage
- Adapter for wall and pole mounting
- Preinstalled bulkheads for cable connections and DIN-rail for additional devices/accessories

### + Smart PoE and Power

- Futureproof with 90W/port and backward compatibility with all PoE protocols (60W/30W/15W)
- PoE watchdog monitors status of connected PoE devices
- Built-in power supply and surge protection with auxiliary DC power output

### + Support

- Complimentary technical support
- Free firmware upgrades and notifications
- Limited lifetime warranty

## Software Features

### + Interface

- CLI and Web Browser
- SNMP v2/v3

### + Management

- Firmware upgrade
- Configuration backup
- DHCP Client
- RMON (Remote Monitoring)
- Port Mirroring
- SNTP (Simple Network Time Protocol) synchronization
- LLDP (Link Layer Discovery Protocol)
- IPv4/IPv6

### + Security

- MAC address filtering
- Enable/Disable port
- System logging
- IEEE 802.1x LAN Access Control
- Remote authentication through RADIUS
- SSH for CLI and Telnet security
- SSL and HTTPS for Web security
- Multi-user login and privileged access management
- Port security

### + Layer 2 Features

- Auto-negotiation for port speed and duplex mode**
- Flow Control
- IEEE 802.3x full duplex mode
- Back-pressure half duplex mode

#### **Redundant Protocol**

- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)

#### **VLANs**

- IEEE 802.1Q Tag VLANs (Up to 32 VLANs)

## Hardware Specifications

### + Interface

#### Ethernet Port

10/100/1000BASE-T PoE: 2 or 4 ports

10/100/1000BASE-T: 0 or 2 ports

100/1000BASE SFP: 0 or 2 ports

#### LED Indicators

Per Unit: Power (Green), Aux Power (Green)

Per Port: Link/Activity (Green: 10/100M, Orange: 1000M; On: connection established, Flashing: data transmission in progress)

Per Port: PoE (Green: Auto Mode, Orange: Force Mode)

#### Mode Button

Exiting without changes

Resetting to the factory settings

Operating with a static IP address

Setting DHCP mode

Setting BootP

Setting unmanaged mode

### + Physical

#### Casing Material

Polycarbonate (PC)

#### IP Rating

IP65

#### NEMA Rating

NEMA 4/4X

#### Impact Protection

IK10

#### Dimensions

11.2 x 4.8 x 14.3in (W x D x H)

284 x 121 x 364mm (W x D x H)

#### Weight

9.5lbs (4.3Kg)

#### Installation Type

Wall or Pole Mounting

### + Technology

#### Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3x full duplex and flow control

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1w RSTP

IEEE 802.1ab LLDP

IEEE 802.3af/at/bt Power over Ethernet

IEEE 802.1x Port-based Network Access Control

#### Forward/Filtering Rate

14,880pps for 10Mbps

148,880pps for 100Mbps

1,488,000pps for 1000Mbps

#### Processing Type

Store-and-Forward

Auto-Negotiation

Half-duplex back-pressure full-duplex flow control

Auto MDI/MDIX

#### Address Table Size

8K

### + Power

#### Input

100-240VAC, -15% - +10% (single-phase)

#### Output

24VDC, 300mA (typical)

#### PoE Power Output

Ports 1-3: Up to 90W/port

Port 4: Up to 30W

#### PoE Power Budget

165W (155W if power output used)

## + Environmental

### Operating Temp.

-40 to 75°C (-40 to 167°F)

### Storage Temp.

-40 to 85°C (-40 to 185°F)

### Relative Humidity

5% to 95% (non-condensing)

### MTBF

805,920 hours

## + Warranty

### Length

Limited Lifetime

### Details

[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)

## + What's Included

### Device

Smart Camera Box

### Installation

Mounting Adapter

### Documentation

Quick install guide

## + Regulatory

### ISO

Manufactured in ISO-9001 facility

### EMI

FCC Part 15B Class A

VCCI Class A

ICES-003

EN 61000-6-4

### EMS

EN 61000-6-2

EN 61000-6-3

EN 61000-4-2 (ESD)

EN 61000-4-3 (Radiated RFI)

EN 61000-4-4 (Burst)

EN 61000-4-5 (Surge)

EN 61000-4-6 (Induced RFI)

### Safety

UL 61010



### Vibration

IEC 60068-2-6


### Shock

IEC 60068-2-27

# Dimensions

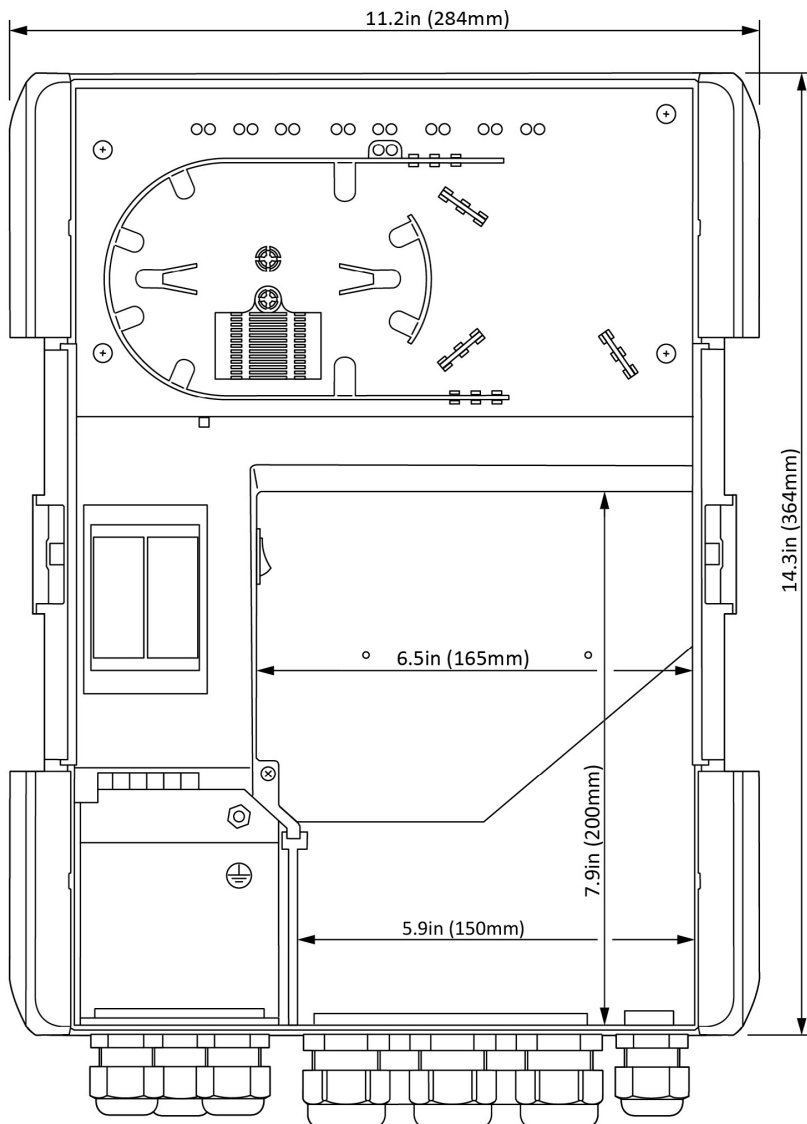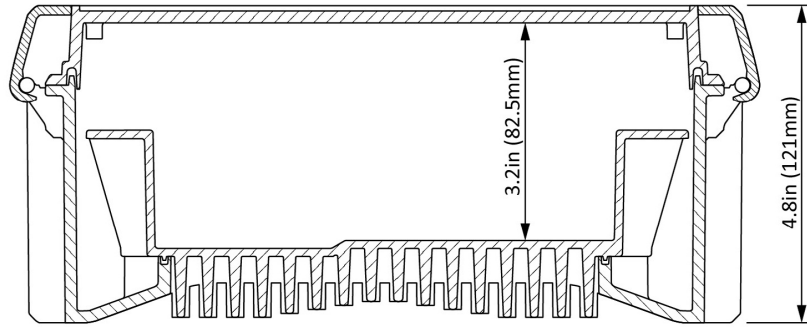

## Application

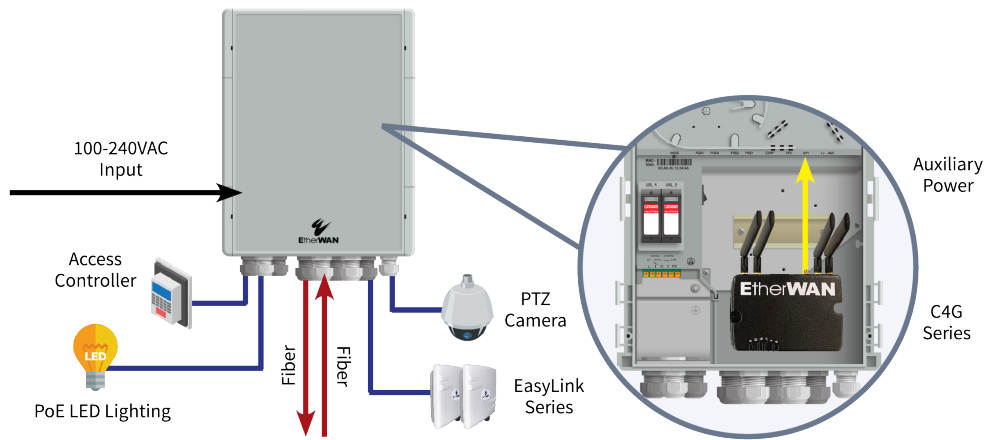

## Ordering Info

### + Model

EASYPOEBOX4F	4-Port 10/100/1000BASE-T PoE + 2-Port 100/1000BASE SFP Managed Ethernet Switch
EASYPOEBOX4C	4-Port 10/100/1000BASE-T PoE + 2-Port 10/100/1000BASE-T Managed Ethernet Switch
EASYPOEBOX2F	2-Port 10/100/1000BASE-T PoE + 2-Port 100/1000BASE SFP Managed Ethernet Switch
EASYPOEBOX2C	2-Port 10/100/1000BASE-T PoE + 2-Port 10/100/1000BASE-T Managed Ethernet Switch

### + Accessories

EASYPOEBOXLOCK	Door lock with locking tab
EASYPOEBOXMCS	Mast clamps for masts (51-127mm)
EASYPOEBOXMCL	Mast clamps for masts (102-254mm)



© EtherWAN Systems, Inc. All rights reserved. 20240920

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.