


## EX78162R Series

Managed Hardened PoE Switch 16 Port with Additional 2 Gigabit SFP Ports

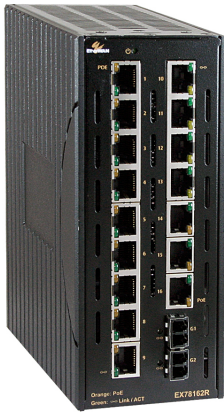

### Overview

EtherWAN's EX78162R provides a hardened 18-port switching platform supporting IEEE802.3at Power over Ethernet, high performance switching with robust management features required for mission-critical and harsh environments where sustained connectivity is crucial.

The EX78162R is equipped with 16 10/100BASE-TX PoE ports, in combination with two Gigabit LC Fiber ports. The IEEE802.3at PoE ports provide up to 30W/port with a total power budget of 240W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements such as outdoor PTZ dome cameras, wireless access points, and way-side communication. The EX78162R is equipped with EtherWAN's Alpha-Ring self-healing ring technology providing less than 15ms fault recovery time. Users are able to access management features such as port security, IGMP snooping, port-based VLAN, GARP protocols, link aggregation, via web browser, telnet, SSH, SNMP, RMON, TFTP, and RS-232 console interfaces. With the hardened specifications, the EX78162R Series is designed to operate at  $-40^{\circ}\text{C}$  to  $75^{\circ}\text{C}$  in harsh environments, where high ESD, shock, and vibration may be present.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

### PoE Connectivity

- » Port 1 to 16 supports IEEE 802.3af or IEEE 802.3at Power over Ethernet.

### Hardened Grade

- » Wide operating temperature range From -40°C to 75°C (-40°F to 167°F) for extreme environments.
- » Fanless and ruggedized housing.
- » High shock and electric noise immunity.

### Supports external storage for Configuration backup and restoration

- » Simplifying the deployment or switch replacement operation.
- » Plug-and-Play system configuration backup and restoration.

## Features

### Management

- » Interface
    - CLI, Telnet and Web Browser
    - SNMP v1/v2c/v3
  - » Firmware and configuration upgrade and backup via TFTP
  - » Supports DHCP Server/Client
  - » RMON (Remote monitoring): group 1, 2, 3, 9
  - » Port mirroring: TX/RX and both
  - » SFP transceivers support Digital Diagnostics Monitoring (DDM)
  - » NTP (Network Time Protocol) time synchronization
  - » IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
- 

### Security

- » MAC address filtering
  - » Enable/disable port
  - » Storm control (broadcast and multicast types)
  - » IEEE802.1x LAN access control
  - » Remote authentication through RADIUS
  - » SSH for CLI and Telnet security
  - » SSL for web security
  - » Multi-level user account/password against unauthorized configuration
  - » System log (remote/local)
- 

### Quality of Service (QoS)

- » Priority Queues: 4 queues per port
  - » Traffic classification based on IEEE802.1p CoS, DSCP, WRR (Weighted round robin) and strict mode
  - » Rate Limiting (Ingress/Egress)
- 

### Layer 2 Features

- » Auto-negotiation for port speed and duplex mode
- » Flow Control
  - IEEE 802.3x full duplex mode

- Back-Pressure half duplex mode
  - » Redundant Protocol
    - IEEE 802.1D Spanning Tree Protocol (STP)
    - IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
    - IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
    - EtherWAN's Alpha-Ring network fault recovery ( <15ms)
  - » VLANs
    - Port-based VLANs
    - IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
    - GVRP (GARP VLAN Registration Protocol)
    - GMRP (GARP Multicast Registration Protocol)
  - » Link Aggregation
    - Static Trunk (2 groups, support MAC base)
    - IEEE 802.3ad Link Aggregation Control Protocol
  - » IGMP Snooping
    - IGMP snooping v1/v2/v3
- 

## Performance

- » Switching Capability: 7.2Gbps
  - » Packet Buffer Size: 2M
  - » MAC Address Table: 8K
-

# Specifications

## Technology

### Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-SX/1000BASE-LX
- IEEE 802.3x Full duplex and flow control
- IEEE 802.1p QoS
- IEEE 802.1Q Tag VLANs
- IEEE 802.1w RSTP
- IEEE 802.1x Port-based Network Access Control
- IEEE 802.3af/at Power over Ethernet (PoE)

### Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

### Packet Buffer Memory

- 2M bits

### Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

### Address Table Size

- 8192 MAC addresses

---

## Power

### Input

- Terminal Block: 47-57VDC

## Power Consumption

- Device: Max. 15W (without PoE)
- PoE power budget (depends on power input): 240W Max

## PoE Power Output

- Port 1 to 16 support PoE
- IEEE 802.3af: up to 15.4W/port, 47-57VDC.
- IEEE 802.3at: up to 30W/port, 50-57VDC

## Protection

- Reverse polarity protection
- 

## Mechanical

### Casing

- Metal Case
- IP30

### Dimensions

- 71.4 x 140 x 170mm (W x D x H)  
(2.85" x 5.6" x 6.8")

### Weight

- 1.7Kg (3.74lbs.)

### Installation

- Wall mounting
- 

## Interface

### Ethernet Port

- 10/100BASE-TX (PoE): 16 ports
- Gigabit: 2 ports

### Console Port

- Port: One DB9 RS-232 port

### Alarm Contact

- One relay output with current 1A@24VDC

## LED Indicators

- Per Unit: Power 1
  - Per Port: Link/Activity (Green)
  - Per PoE Port: PoE (Orange)
- 

## Environment

### Operating Temperature

- -40 to 75°C (-40 to 167°F)  
Tested @ -40 to 85°C (-40 to 185°F)

### Storage Temperature

- -45°C to 85°C (-49°F to 185°F)

### Ambient Relative Humidity

- 5% to 95% (non-condensing)
- 

## Regulatory Approvals

### ISO

- Manufactured in an ISO 9001 facility

### EMI

FCC Part 15B, Class A

EN 61000-6-4

EN 55022

EN 61000-3-2

EN 61000-3-3

### EMS


EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (RFI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)

## Environmental Test Compliance

- IEC 60068-2-6 Fc (Vibration)
- IEC 60068-2-27 Ea (Shock)
- IEC 60068-2-32 Ed (Free fall)

## Dimensions

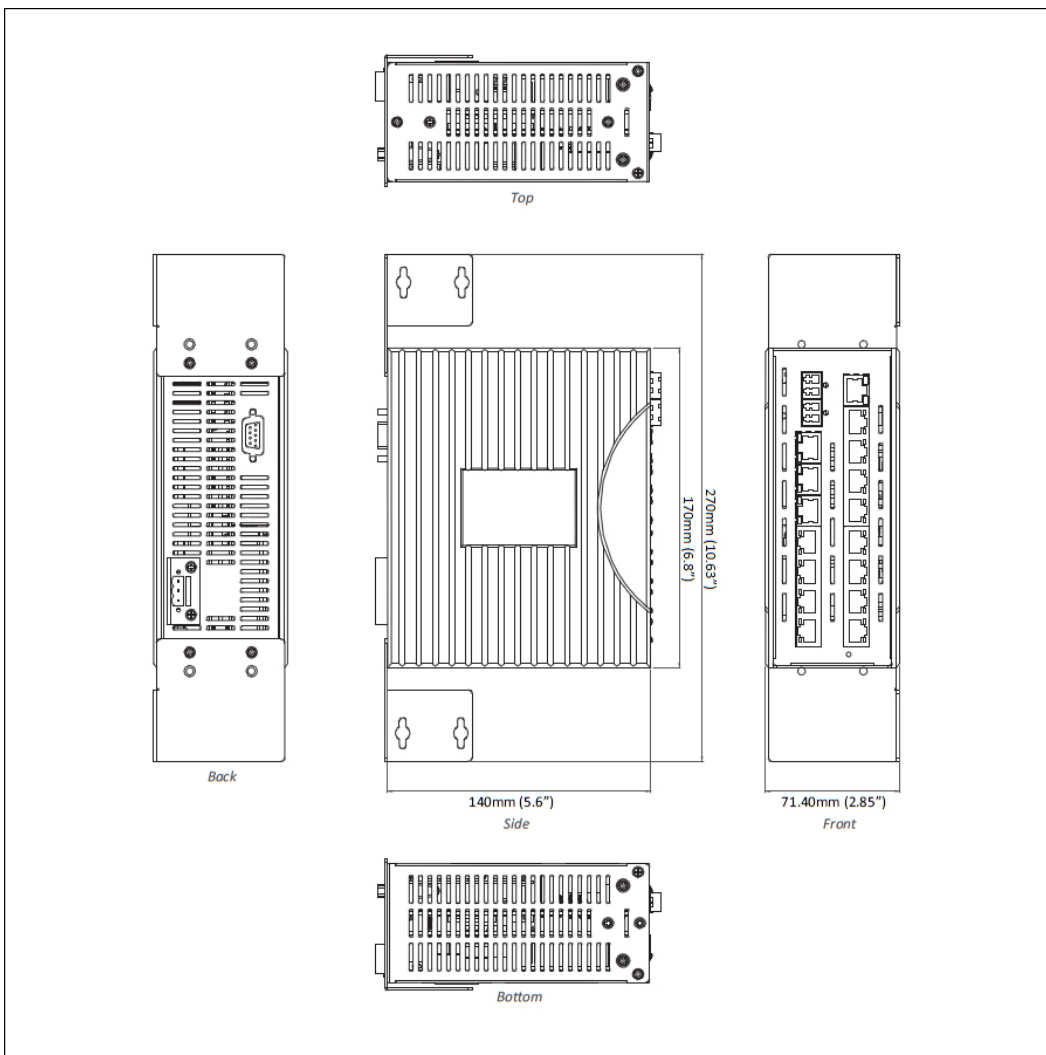



## Ordering Info

### Model

**EX78162R-0MB**

16-port 10/100BASE-TX PoE +2-port Gigabit LC 10Km Managed Ethernet Switch

\* Wall mounting kit included

---

### Optional Accessories

**SDR-480-48**

480W/10A DIN-Rail 48VDC Industrial Power Supply

---



© EtherWAN Systems, Inc. All rights reserved. 20230211

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.