

EL1032T Series

Industrial 10/100BASE-TX to 100BASE-FX Media Converter with PoE/PSE



Highlights

+ Power over Ethernet

Supports IEEE802.3at PoE/PSE standard and IEEE802.3af PoE/PSE compatible

+ Dual Power Interfaces

Supports both terminal block and DC jack for power input selection

+ Industrial operating temperature range

From -10°C to 60°C, wide operating temperature is suitable for outdoor cabinet installation

Overview

The EL1032T Series provides media conversion between 10/100BASE-T(X) and 100BASE-FX Fiber. Through DIP switch selection, Link-Fault-Pass-Through (LFPT) function can be active or disabled. EL1032T supports IEEE 802.3at PoE/PSE standard and can transmit power and data over one RJ45 cable. The EL1032T's industrial design features high shock/vibration resistance, electrical noise immunity and a wide operating temperature range from -10 to 60°C. EL1032T is the ideal media converter for industrial environments.

EtherWAN — "When Connectivity is Crucial."

Specifications

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/FX
IEEE 802.3af/at PoE/PSE

Forward and Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps

Packet Buffer Memory

228Kb

Processing Type

Store-and-Forward
Auto Negotiation
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto MDI/MDIX

+ Power

Input Voltage

48-57VDC

Power Consumption

Device: Max. 3.6W (without PoE)
PoE power budget: 30W Max. (depends on power input)

PoE Power Output

IEEE 802.3at: up to 30W/port, 50-57VDC, 500mA Max.

Protection

Overload current protection
Reverse polarity protection

+ Mechanical

Casing

Aluminum Case

Dimensions

70 x 110 x 30mm (W x D x H)
(2.76" x 4.33" x 1.18")

Weight

0.25Kg (0.55lb.)

Installation

DIN-Rail (top hat type 35mm), Panel, or Wall mounting

+ Interface

Ethernet Port

10/100BASE-TX: 1 port
100BASE-FX: 1 port

LED Indicators

Per Unit: Power
Per 10/100TX Port: Link/ACT, full-duplex/collision
Per 100FX Port: Link/ACT
PoE: PD connect/PD disconnect

+ Environment

Operating Temperature

-10 to 60°C (14 to 140°F)
Tested @ -20 to 70°C (-4 to 158°F)

Storage Temperature

-40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

5% to 95% (non-condensing)

+ Regulatory Approvals

ISO

Manufactured in an ISO 9001 facility

EMI

FCC Part 15B Class A
EN 61000-6-4
EN 55022


EMS

EN 61000-6-2
EN 61000-4-2 (ESD Standards)
EN 61000-4-3 (Radiated RFI Standards)
EN 61000-4-4 (Burst Standards)
EN 61000-4-5 (Surge Standards)
EN 61000-4-6 (Induced RFI Standards)
EN 61000-4-8 (Magnetic Field Standards)


Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration Resistance)
IEC 60068-2-27 Ea (Shock)
FED STD 101C Method5007.1 (Free fall w/package)

Application

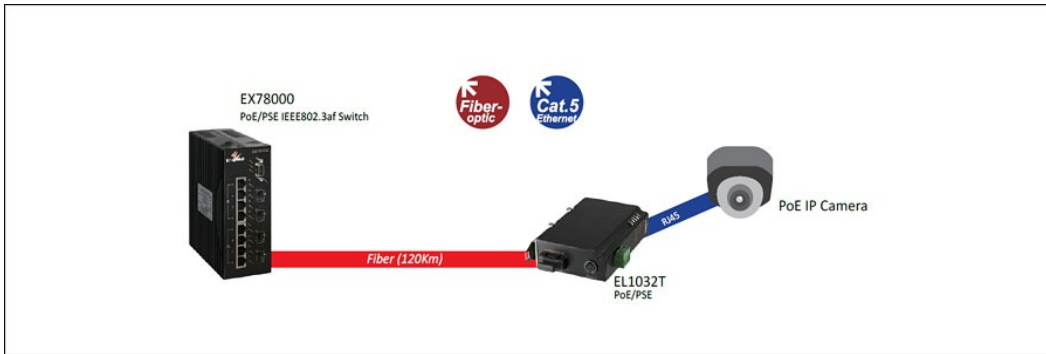

Dimensions

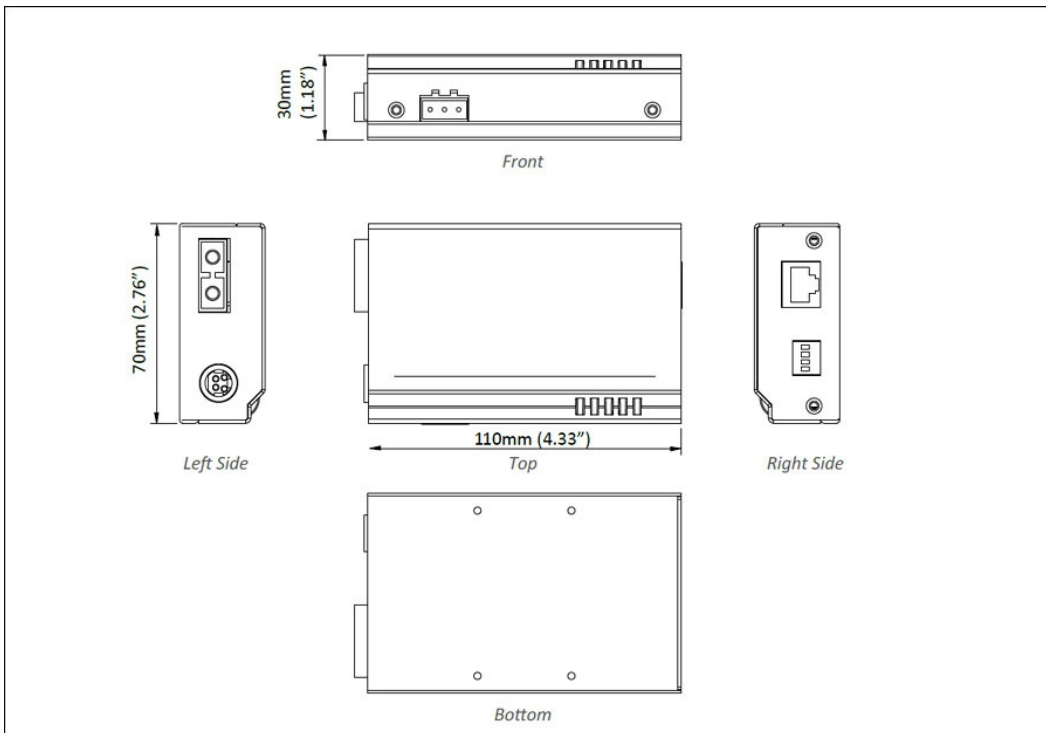

Ordering Info

+ Model

EL1032T-X0B	10/100BASE-TX to 100BASE-FX Industrial Media Converter with IEEE 802.3af 15.4W and IEEE 802.3at 30W PoE/PSE
--------------------	---

* DIN-Rail mounting kit included.

+ 100FX Fiber Options (X)

- | | |
|----------|---|
| 1 | Multi Mode (SC) |
| 2 | Multi Mode (ST) |
| A | Single Mode (SC) - 20Km (1310nm) |
| B | Single Mode (SC) - 40Km (1310nm) |
| H | Single Mode (ST) - 20Km (1310nm) |
| 6 | Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km |
| 7 | Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km |
| 8 | Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km |
| 9 | Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km |
| P | Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km |
| Q | Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km |
| R | Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km |
| S | Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km |

* More 100FX Fiber options also available upon request.

+ Optional Accessories

EDR-75-48	75W/1.6A DIN-Rail 48VDC Industrial Power Supply
EXGS-120A-48	Power Supply 120W 48VDC with Latch

