

# EX71000 Series

Hardened Managed 8-port 10/100BASE and 2-port Gigabit Ethernet Switch with SFP options



## Overview

EtherWAN's EX71000 Series is a hardened DIN-rail mounted managed Ethernet switch platform. Equipped with up to 8 10/100BASE-TX and 2 fiber ports, the EX71000 Series provides flexibility, speed, and reliability to support networks for urban infrastructure, transportation, security, and other areas where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

## Highlights

### + Hardened-Grade for Non-Ventilated & Harsh Environments

- Wide operating temperature range -40 to 75°C (-40 to 167°F)
- Fanless operation
- High impact, thermal shock, and electrical noise resistance

### + Compliance

- EN 50121-4 certified for railway applications
- NEMA TS2 rated
- UL certified for safety

### + Management/Security Features

- Port control
- 802.1x port-based network access control and remote authentication through RADIUS
- Configure and monitor with eVue™ and eLite™

### + Support

- Complimentary Technical Support
- Free Firmware Upgrades
- Limited Lifetime Warranty

## Features

### + Interface

CLI, Telnet, Web GUI  
SNMP v1/v2c/v3

### + Management

Firmware upgrade  
Configuration backup via TFTP  
DHCP Server/Client  
RMON (Remote Monitoring): group 1, 2, 3, 9  
Port Mirroring: TX/RX and both  
NTP (Network Time Protocol) synchronization  
IEEE 802.1ab LLDP (Link Layer Discovery Protocol)  
IPv4/IPv6

### + Security

MAC Address Filtering  
Enable/Disable port  
Storm control (Broadcast and multicast types)  
IEEE 802.1x LAN Access control  
Remote authentication through RADIUS and TACACS+  
SSH for CLI and Telnet security  
SSL for web security  
System log (Remote/Local)  
Multi-level user account/password against unauthorized configuration

### + Quality of Service (QoS)

Priority Queues: 4 queues per port  
Traffic classification based on IEEE 802.1p CoS, DSCP, WRR and strict mode  
Rate Limiting (Ingress/Egress)

### + Layer 2 Features

**Auto-negotiation for port speed and duplex**  
Flow Control  
IEEE 802.3x full duplex mode  
Back-Pressure half duplex mode

#### Redundant Protocols

IEEE 802.1D STP  
IEEE 802.1w RSTP  
IEEE 802.1s MSTP  
EtherWAN's Alpha-Ring network fault recovery (<15ms)

#### VLANs

Port-based VLANs  
IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)  
GVRP  
GMRP

#### Link Aggregation

Static Trunk (2 groups, support MAC base)  
IEEE 802.3ad LACP

#### IGMP Snooping v1/v2/v3

# Specifications

## + Interface

### Ethernet

4, 6 or 8 x 10/100BASE-T(X)  
0 or 4 x 100BASE-FX  
0, 1 or 2 x Gigabit

### Console

1 x DB9 RS-232

### Alarm Contact

1 x Relay output, current capacity 0.6A/30VDC

### LED Indicators

Per Unit: Power 1, Power 2, Alarm  
Per Port: Link/Activity, Speed

## + Technology

### Standards

IEEE 802.3 10BASE-T  
IEEE 802.3u 100BASE-TX/100BASE-FX  
IEEE 802.3ab 1000BASE-T  
IEEE 802.3z 1000BASE-SX/1000BASE-LX  
IEEE 802.3x Full duplex and flow control  
IEEE 802.1p QoS  
IEEE 802.1Q Tag VLANs  
IEEE 802.1w RSTP  
IEEE 802.1x PNAC

### Forward/Filtering Rate

14,880pps for 10Mbps  
148,810pps for 100Mbps  
1,488,100pps for 1000Mbps

### Packet Buffer Memory

12M bits

### Processing Type

Store-and-Forward  
Auto-negotiation  
Half-duplex back-pressure and IEEE 802.3x Full-duplex flow control  
Auto MDI/MDIX

### Address Table Size

16K MAC Addresses

## + Environmental

### Operating Temp.

-40 to 75°C (-40 to 167°F)  
Tested @ -40 to 85°C (-40 to 185°F)

### Storage Temp.

-45 to 85°C (-49 to 185°F)

### Relative Humidity

5% to 95% (non-condensing)

## + Regulatory

### ISO

Manufactured in ISO-9001 facility

### EMI

FCC Part 15B Class A  
EN 55032  
EN 61000-6-4  
EN 61000-3-2  
EN 61000-3-3

### EMS

EN 61000-6-2  
EN 61000-4-2 (ESD)  
EN 61000-4-3 (Radiated RFI)  
EN 61000-4-4 (Burst)  
EN 61000-4-5 (Surge)  
EN 61000-4-6 (Induced RFI)  
EN 61000-4-8 (Magnetic Field)

### Safety

UL 61010  
ISA 12.12.01

### Vibration

IEC 60068-2-6 Fc

### Shock

IEC 60068-2-27 Ea

### Free Fall

FED STD 101C Method 5007.1

### Industrial Compliance

NEMA TS2  
EN 50121-4

## + Power

### Input

12-48VDC Redundant (Terminal block)

### Power Consumption

7.5W Max. 0.31A@24VDC

### Protection

Reverse Polarity Protection

## + Physical

### Casing Material

Aluminum

### IP Rating

IP30

### Dimensions

60 x 125 x 145mm (W x D x H)  
2.36" x 4.92" x 5.7"

### Weight

1.05kg

### Installation Type

DIN-rail mounting

## + Warranty

### Length

Limited Lifetime

### Details

[www.etherwan.com/support/warranty-policy](http://www.etherwan.com/support/warranty-policy)

## + What's Included

### Device

Ethernet Switch


### Cables

1 Console Cable


### Documentation

Quick Install Guide

## Dimensions

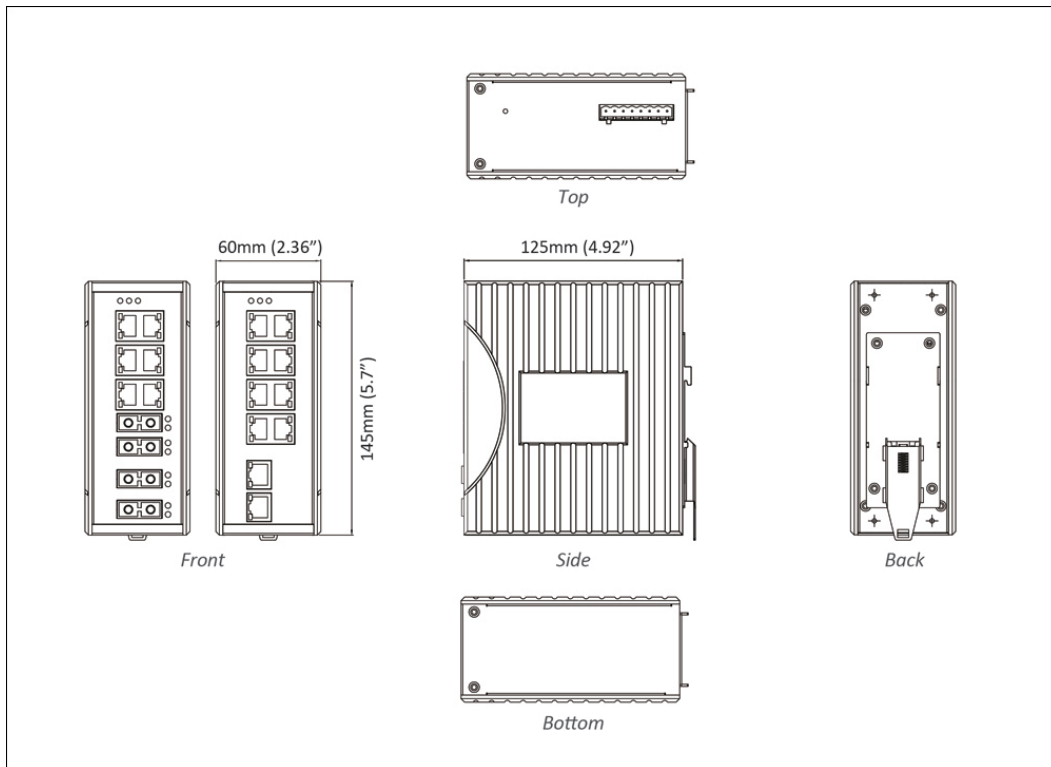


## Application

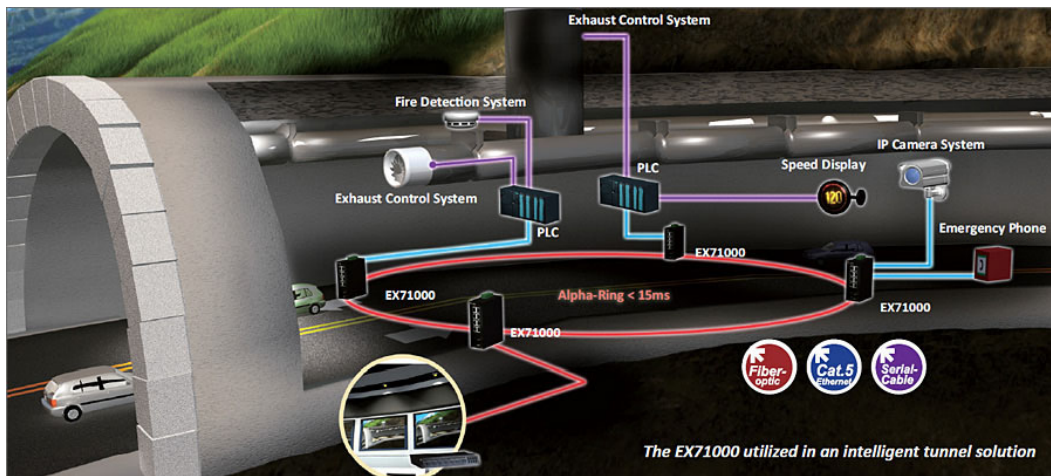

# Software

Network Management [eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery [eLite™ Network Discovery and IP Configuration Tool](#)

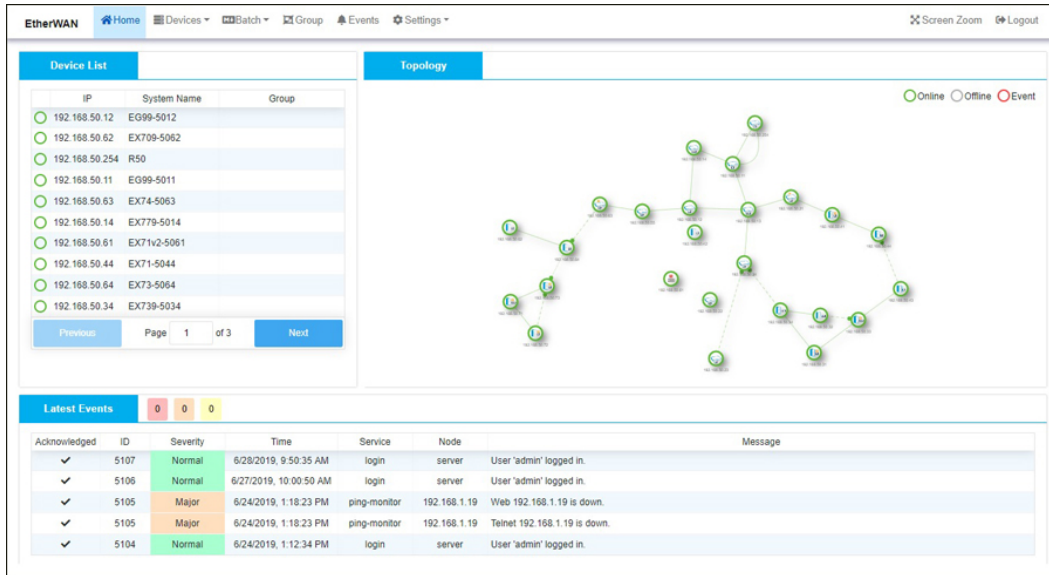

**Device List**


IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

**Topology**

Legend: ● Online ○ Offline ○ Event

**Latest Events**

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/29/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Telnet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

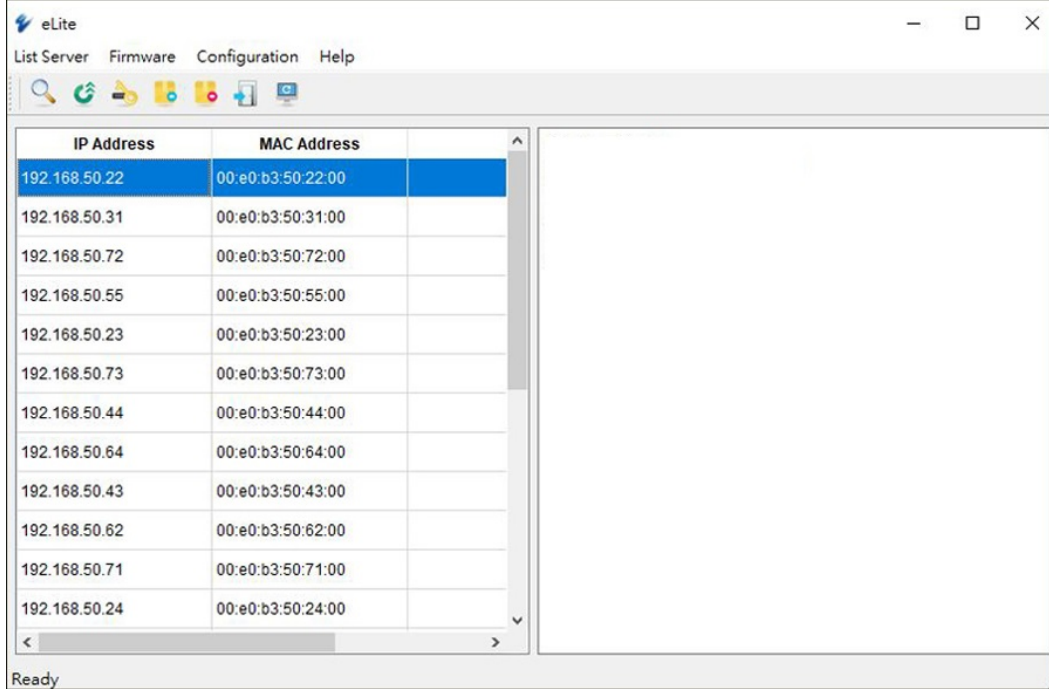

**eLite**

List Server Firmware Configuration Help

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

Ready

## Ordering Info

### + Model

<b>EX71802-0YB</b>	8-port 10/100BASE-TX + 2-port Gigabit
<b>EX71620-X0B</b>	6-port 10/100BASE-TX + 2-port 100BASE-FX
<b>EX71622-XYB</b>	6-port 10/100BASE-TX + 2-port 100BASE-FX +2-port Gigabit
<b>EX71440-X0B</b>	4-port 10/100BASE-TX + 4-port 100BASE-FX

\* DIN-Rail mounting kit included.

### + 100FX Fiber Options (X)

<b>1</b>	Multi Mode (SC) - 2Km
<b>2</b>	Multi Mode (ST) - 2Km
<b>A</b>	Single Mode (SC) - 20Km
<b>B</b>	Single Mode (SC) - 40Km
<b>V</b>	100BASE SFP (DDM)

\* More 100FX Fiber options also available upon request.

### + Gigabit Port Options (Y)

<b>1</b>	10/100/1000BASE-TX
<b>3</b>	1000BASE-SX (SC) - 550m
<b>4</b>	1000BASE-SX (SC) - 2Km
<b>5</b>	1000BASE-SX (ST) - 550m
<b>A</b>	1000BASE-LX (SC) - 10Km
<b>B</b>	1000BASE-LX (SC) - 20Km
<b>R</b>	1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
<b>S</b>	1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
<b>V</b>	100/1000BASE SFP (DDM)

\* More Gigabit options also available upon request.

### + Accessories

<b>Hardened SFP Modules</b>	<a href="http://www.etherwan.com/products/sfp-fiber-transceiver">www.etherwan.com/products/sfp-fiber-transceiver</a>
<b>DIN-Rail Power Supplies</b>	<a href="http://www.etherwan.com/products/din-rail-power-supply">www.etherwan.com/products/din-rail-power-supply</a> (* )
<b>*Recommended Power Supply</b>	HDR-30-24 30W 24VDC DIN-Rail Power Supply
<b>EB-232</b>	Configuration Backup and Restoration Tool



© EtherWAN Systems, Inc. All rights reserved. 20241003

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.