

EX78900 Series

Hardened Managed 16-port (8 x PoE) Gigabit Ethernet Switch



Highlights

This product has been discontinued as of 05/31/22. Please see the following for an alternative product: [EX78900E Series](#)



+ High Bandwidth and Versatility

8 or 12 10/100/1000BASE-T(X) ports for high bandwidth connections
Up to 4 gigabit fiber connections
Full capacity switching running at full duplex

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
Fanless operation
High impact, thermal shock, and electrical noise resistance

+ Lite Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF
Redundancy with VRRP
Reduces amount of broadcast traffic

+ PoE Features

Up to 60W/port with 240W total power budget
Long distance PoE up to 250m (820ft)
PoE watchdog monitors status of connected PoE devices

+ Management/Security Features

Port control
802.1x port-based network access control and remote authentication through RADIUS
Configure and monitor with eVue™ and eLite™

+ Support

Complimentary Technical Support
Free Firmware Upgrades
Limited Lifetime Warranty

Overview

[When should you use an Industrial Layer 3 switch?](#)

EtherWAN's EX78900 Series is a hardened DIN-rail mounted managed PoE Ethernet switch platform. Equipped with up to 12 gigabit ports with 8-port PoE that provides up to 60W/port and 4 fiber ports, the EX78900 Series provides flexibility, speed, and reliability for networks in urban infrastructure, transportation, security, and other areas where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

Features

+ Interface

CLI, Telnet, Web GUI
SNMP v1/v2c/v3

+ Management

Firmware and configuration upgrade and backup via TFTP
DHCP Server/Client
RMON (Remote Monitoring): group 1, 2, 3, 9
Port Mirroring: TX/RX and both
NTP (Network Time Protocol) synchronization
IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
IPv4/IPv6

+ Security

MAC Address Filtering
Enable/Disable port
Storm control (Broadcast and multicast types)
IEEE 802.1x LAN Access Control
Remote authentication through RADIUS and TACACS+
SSH for CLI and Telnet security
SSL for web security
System log (Remote/Local)
ACL

+ Quality of Service (QoS)

Priority Queues: 4 queues per port
Traffic classification based on IEEE 802.1p CoS, DSCP, WRR and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex mode
Flow Control
IEEE 802.3x Full duplex mode
Back-Pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery (<15ms)

VLANs

IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation

Static Trunk (4 groups, support MAC base)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing

Maximum number of routes in hardware: 64 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy

VRRP

Specifications

+ Interface

Ethernet

8 or 12 (8 PoE) x 10/100/1000BASE-T(X)
4 x 1000BASE SX/LX/SFP

Console

1 x DB9 RS-232

Alarm Contact

1 x Relay output, current capacity 0.5A/48VDC

LED Indicators

Per Unit: Power 1, Power 2
Per Port: Link/Activity (Green)
Per PoE Port: PoE Status (Orange)

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x Full duplex and flow control
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1w RSTP
IEEE 802.1x PNAC
IEEE 802.3af/at Power over Ethernet

Forward/Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps

Packet Buffer Memory

12M bits

Processing Type

Store-and-Forward
Auto-negotiation
Half-duplex back-pressure and IEEE 802.3x Full-duplex flow control
Auto MDI/MDIX

Jumbo Frame

9216 bytes

Address Table Size

16K MAC Addresses

+ Power

Input

52-57VDC Redundant (Terminal block)

Power Consumption
20W Max (without PoE)

PoE Technology
Alternative A & B
Pins 1/2(+), 3/6(-), Pins 7/8(-), 4/5(+)

PoE Power Output
PoE can be configured as:
1. 6-port 15.4W PoE and 2-port 60W PoE
2. 8-port 30W PoE
3. 4-port 10/100/1000-TX and 4-port 60W PoE
4. Other PoE power level configuration can be done through firmware
Power Budget: 240W

Protection
Reverse Polarity Protection

+ Physical

Casing Material
Aluminum

IP Rating
IP30

Dimensions
72 x 140 x 170mm (W x D x H)
2.8" x 5.5" x 6.7"

Weight
1.5kg (3.3lbs)

Installation Type
DIN-rail mounting

+ Environmental

Operating Temp.
-40 to 75°C (-40 to 167°F)
Tested @ -40 to 85°C (-40 to 185°F)

Storage Temp.
-45 to 85°C (-49 to 185°F)

Relative Humidity
5% to 95% (non-condensing)

+ Regulatory

ISO
Manufactured in ISO-9001 facility

EMI
FCC Part 15B Class A
VCCI Class A
EN 61000-6-4
EN 61000-3-2
EN 61000-3-3

EMS
EN 61000-6-2
EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic Field)

Vibration
IEC 60068-2-6 Fc

Shock
IEC 60068-2-27 Ea

Free Fall
FED STD 101C Method 5007.1

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet Switch


Cables

1 Console Cable


Documentation

Quick Install Guide

Dimensions

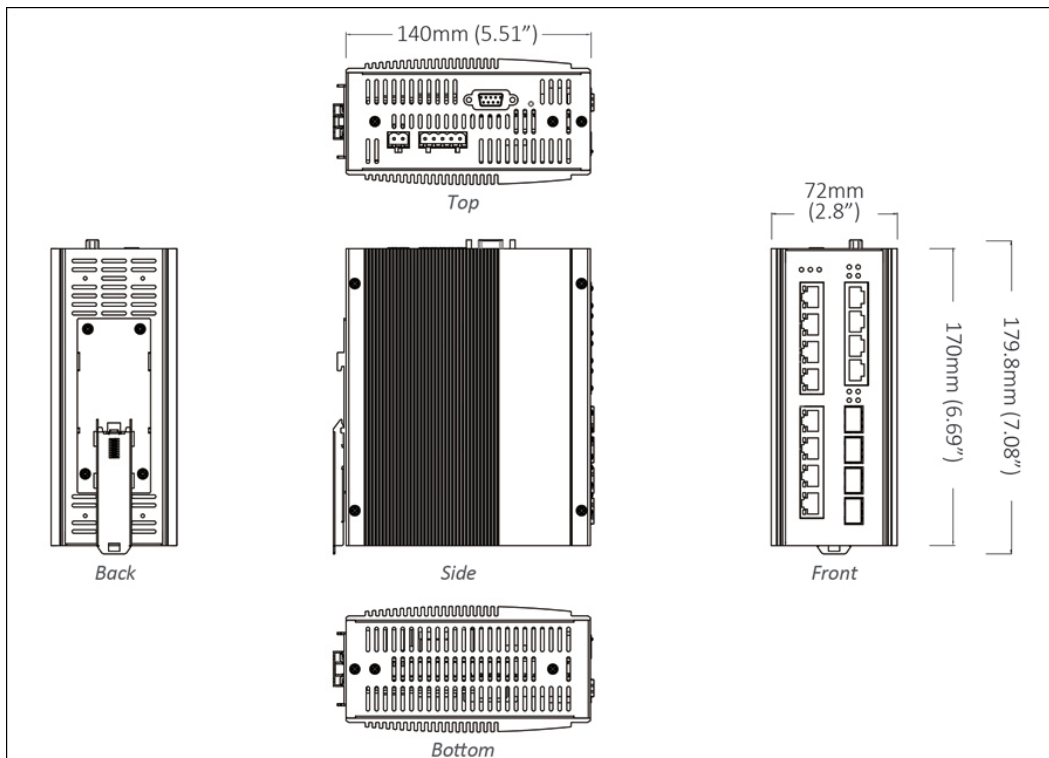

Application

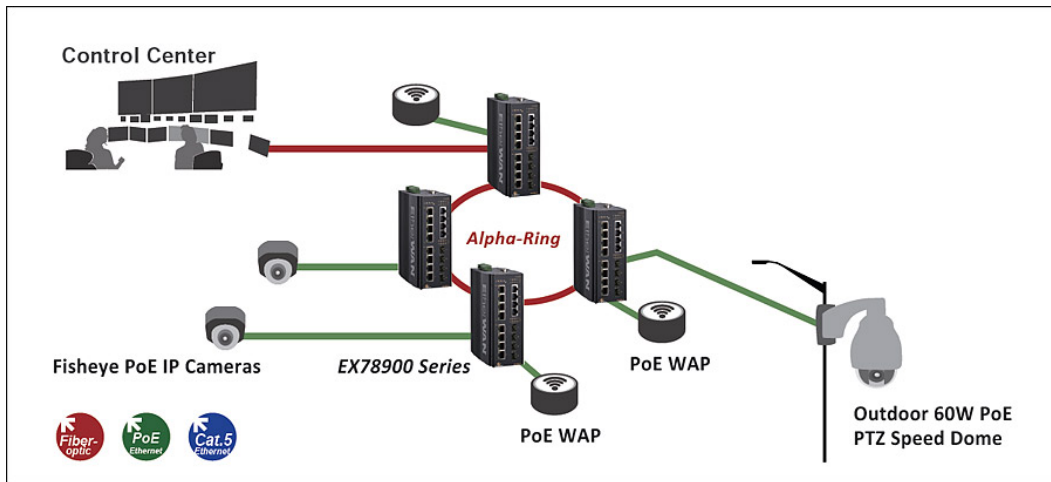

Software

[Network Management eVue™ Network Configuration and Monitoring Tool](#)
[Network Discovery eLite™ Network Discovery and IP Configuration Tool](#)


EtherWAN Home Devices Batch Group Events Settings Screen Zoom Logout

Device List

| IP | System Name | Group |
|----------------|-------------|-------|
| 192.168.50.12 | EG99-5012 | |
| 192.168.50.62 | EX709-5062 | |
| 192.168.50.254 | R50 | |
| 192.168.50.11 | EG99-5011 | |
| 192.168.50.63 | EX74-5063 | |
| 192.168.50.14 | EX779-5014 | |
| 192.168.50.61 | EX71v2-5061 | |
| 192.168.50.44 | EX71-5044 | |
| 192.168.50.64 | EX73-5064 | |
| 192.168.50.34 | EX739-5034 | |

Previous Page 1 of 3 Next

Topology

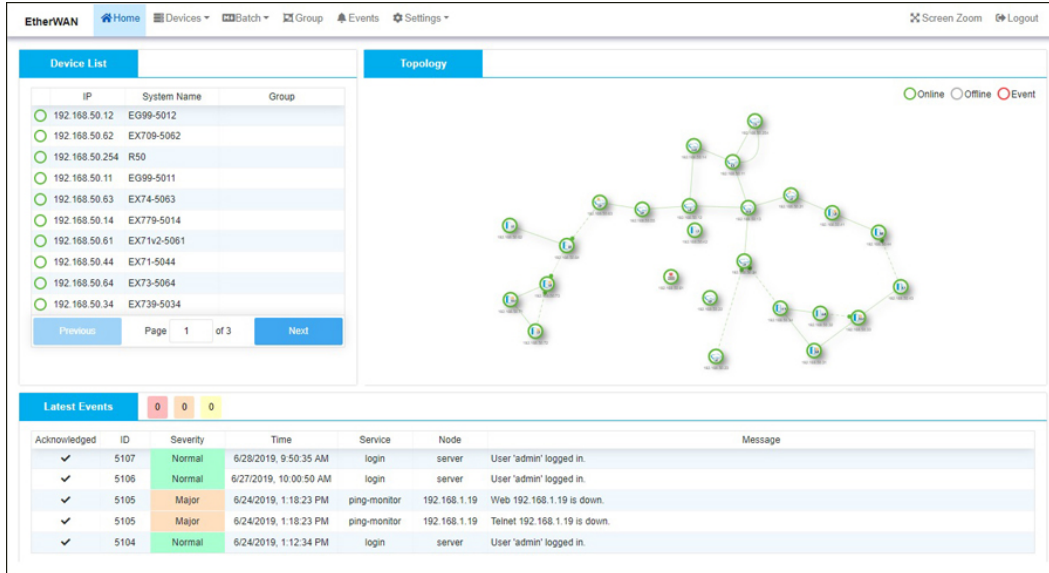

Online Offline Event

Latest Events 0 0 0

| Acknowledged | ID | Severity | Time | Service | Node | Message |
|--------------|------|----------|------------------------|--------------|--------------|------------------------------|
| ✓ | 5107 | Normal | 6/28/2019, 9:50:35 AM | login | server | User 'admin' logged in. |
| ✓ | 5106 | Normal | 6/27/2019, 10:00:50 AM | login | server | User 'admin' logged in. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Web 192.168.1.19 is down. |
| ✓ | 5105 | Major | 6/24/2019, 1:18:23 PM | ping-monitor | 192.168.1.19 | Telnet 192.168.1.19 is down. |
| ✓ | 5104 | Normal | 6/24/2019, 1:12:34 PM | login | server | User 'admin' logged in. |

eLite List Server Firmware Configuration Help

Search
Refresh
Home
Help

| IP Address | MAC Address | |
|---------------|-------------------|--|
| 192.168.50.22 | 00:e0:b3:50:22:00 | |
| 192.168.50.31 | 00:e0:b3:50:31:00 | |
| 192.168.50.72 | 00:e0:b3:50:72:00 | |
| 192.168.50.55 | 00:e0:b3:50:55:00 | |
| 192.168.50.23 | 00:e0:b3:50:23:00 | |
| 192.168.50.73 | 00:e0:b3:50:73:00 | |
| 192.168.50.44 | 00:e0:b3:50:44:00 | |
| 192.168.50.64 | 00:e0:b3:50:64:00 | |
| 192.168.50.43 | 00:e0:b3:50:43:00 | |
| 192.168.50.62 | 00:e0:b3:50:62:00 | |
| 192.168.50.71 | 00:e0:b3:50:71:00 | |
| 192.168.50.24 | 00:e0:b3:50:24:00 | |

Ready

Ordering Info

+ Model - [Buy Now](#)

| | |
|--------------------|---|
| EX78931-0VB | 12-Port 10/100/1000BASE-TX with 8-port PoE + 4-port Gigabit SFP |
| EX78921-0VB | 8-Port 10/100/1000BASE-TX PoE + 4-Port Gigabit SFP |
| EX78921-0XB | 8-Port 10/100/1000BASE-TX PoE + 4-Port Gigabit Fiber |

* DIN-Rail mounting kit included.

+ Gigabit Port Options (X)

| | |
|----------|---|
| 3 | 1000BASE-SX (SC) - 550m |
| 4 | 1000BASE-SX (SC) - 2Km |
| 5 | 1000BASE-SX (ST) - 550m |
| A | 1000BASE-LX (SC) - 10Km |
| B | 1000BASE-LX (SC) - 20Km |
| R | 1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km |
| S | 1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km |

* More Gigabit options also available upon request.

+ Accessories

| | |
|-------------------------------------|--|
| Hardened Gigabit SFP Modules | www.etherwan.com/products/sfp-fiber-transceiver |
| DIN-Rail Power Supplies | EPOW-54-600 |
| *Recommended Power Supply | EPOW-54-600 |
| EB-232 | Configuration Backup and Restoration Tool |

