

EX32008 Series

Industrial Unmanaged 7 to 8-port 10/100BASE-TX and 1-port 100BASE-FX Ethernet Switch



Overview

EtherWAN's EX32008 Series is a industrial unmanaged Fast Ethernet switching platform, designed for easy deployment in harsh environments. The EX32008 Series supports 12 to 48VDC redundant power input, and also provides relay alarm while power failure or port link down occur.

The EX32008 is equipped with eight Fast Ethernet ports, or a combination of Fast Ethernet copper ports and one 100FX port for long distance connectivity. This versatile switch features 10/100Mbps transfer speeds, full/half-duplex auto-negotiation and auto MDI/MDIX operation allowing you to connect your network devices without hassles.

The EX32008 is feature-rich with full wire speed Fast Ethernet throughput, QoS (Quality of Service), and IEEE802.3az EEE (Energy Efficient Ethernet). The EX32008 Series is built with relay alarm to notify users when power fails or link down occurs. It also supports port link down alarm by enabling the DIP switch. The EX32008 Series is housed with DIN rail mountable plastic compact case which is an ideal solution for applications in harsh environments.

EtherWAN — "When Connectivity is Crucial."

Spotlight

+ Industrial Grade

Supports -10 to 60°C (14 to 140°F) operating temperature

+ High Reliability

Fanless design

+ Fiber Connectivity

Up to one 100BASE-FX port with SC, ST, WDM options

Specifications

+ Technology

Standards

IEEE 802.3u 100BASE-TX/FX
IEEE 802.3x full-duplex flow control
IEEE 802.3az Energy Efficient Ethernet
IEEE 802.1p Quality of Service (QoS)

Forward/Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps

Packet Buffer Memory

448K bits

Processing Type

Store-and-Forward
Auto Negotiation
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto MDI/MDIX

Address Table Size

1K MAC addresses

+ Interface

Ethernet

10/100BASE-TX: 8 or 7 ports
100BASE-FX: 0 or 1 port

LED Indicators

Per Unit: Power 1 (Green), Power 2 (Green), Fault (Red)

Per Port: Link/Activity (Green)

DIP Switches

Enable/Disable Port fault alarm

Alarm Contact

One relay output with current 1A@250VAC
Supports normal close and normal open

+ Environmental

Operating Temp.

-10 to 60°C (14 to 140°F)

Storage Temp.

-40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

5% to 95% (non-condensing)

+ Power

Input

12-48VDC (Terminal Block)

Power Consumption

2.47W@24VDC

Protection

Reverse Polarity Protection

+ Physical

Casing Material

Plastic Case

IP Rating

IP30

Dimensions

35 x 86 x 149mm (W x D x H) (1.4" x 3.44" x 5.96")

Weight

0.3Kg (0.66lbs)

Installation Type

DIN-Rail (Top hat type 35mm) mounting

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 61000-3-2

EN 61000-3-3

EN 55022 Class A

EMS

EN 61000-6-2

- EN 61000-4-2 (ESD)

- EN 61000-4-3 (Radiated RFI)

- EN 61000-4-4 (Burst)

- EN 61000-4-5 (Surge)

- EN 61000-4-6 (Induced RFI)

- EN 61000-4-8 (Magnetic field)

Safety

UL 60950

UL 62368

Environmental Test Compliance


IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

- Tested with Cross Weight and Drop High standard table

Dimensions

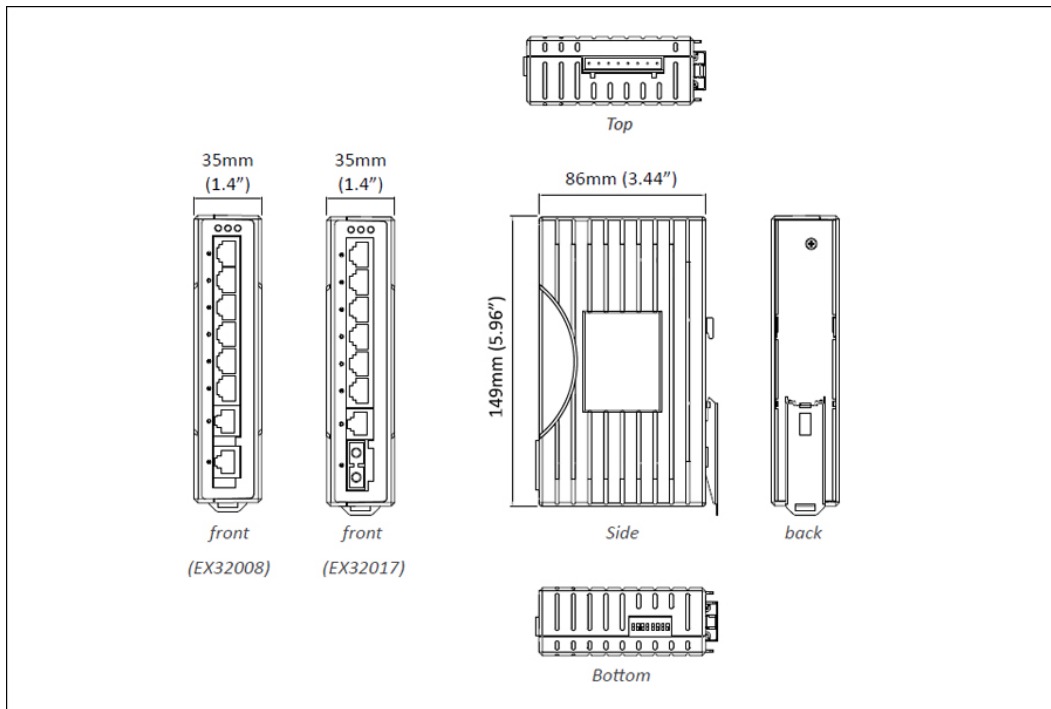

Ordering Info

+ Model

| | |
|-------------------|--|
| EX32008 | 8-port 10/100BASE-TX Industrial Unmanaged Ethernet Switch |
| EX32017-XY | 7-port 10/100BASE-TX +1-port 100BASE-FX Industrial Unmanaged Ethernet Switch |

* DIN-Rail mounting kit included.

+ 100FX Fiber Options (XY)

| | |
|-----------|---|
| 1A | Multi Mode (SC) - 2Km |
| 1B | Multi Mode (ST) - 2Km |
| 2A | Single Mode (SC) - 20Km |
| 2D | Single Mode (ST) - 20Km |
| 2E | Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km |
| 2G | Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km |

* More 100FX Fiber options also available upon request.

+ Optional Accessories

| | |
|------------------|---|
| HDR-30-24 | 30W/1.5A DIN-Rail 24VDC Industrial Power Supply |
| HDR-60-24 | 60W/2.5A DIN-Rail 24VDC Industrial Power Supply |
| EDR-75-24 | 75W/3.2A DIN-Rail 24VDC Industrial Power Supply |

