

EL2211 Series

10/100/1000BASE-TX to 1000BASE-SX/LX/BX Media Converter



Highlights

+ Gigabit Connectivity

Auto 10/100/1000BASE-TX and 1000BASE-SX/LX/BX Ethernet transmission conversion
1000Mbps Full duplex, 10/100MBps Full/Half duplex

+ Optional Chassis System

Supports wall mounting or EtherWAN's EMC1600 chassis system for easy group installation with power redundancy

+ Link-Fault-Pass-Through (LFPT)

LFPT function let network operators be aware of network connection status
If a link fails, the LFPT function will notify the connected device and disable the connection

Overview

The EL2211 Series provides media conversion between 10/100/1000BASE-T(X) and 1000BASE-SX/LX/BX Fiber. Through DIP switch selection, Link-Fault-Pass-Through (LFPT) function can be active or disabled. With Gigabit transmission rate, the EL2211 supports Jumbo Frame up to 9K bytes. The EL2211 is the ideal media converter for enterprise environments.

EtherWAN — "When Connectivity is Crucial."

Specifications

+ Interface

Ethernet Port
10/100/1000BASE-TX: 1 port
1000BASE-SX/LX/BX: 1 port

LED Indicators
Per Unit: Power, LFPT
Per Port: Link/Activity, Speed

+ Technology

Standards
IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX
IEEE 802.3ab 1000BASE-T
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x Full duplex and flow control

Forward/Filtering Rate
14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps

Processing Type
Store-and-forward
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
Auto-negotiation
Auto MDI/MDIX

+ Power

Input
12VDC

Power Consumption
2.76W max. 0.23A@12VDC

+ Physical

Casing Material
Aluminum

Dimensions
80.3 x 109.2 x 23.8mm (W x D x H)
3.16" x 4.30" x 0.94"

Weight
0.15kg (0.33lbs)

Installation Type
Wall mounting, or in EMC1600 Chassis System

+ Environmental

Operating Temp.
0 to 50°C (32 to 122°F)

Storage Temp.
-10 to 70°C (-14 to 158°F)

Relative Humidity
5% to 95% (non-condensing)

+ Regulatory

ISO
Manufactured in ISO-9001 facility

Safety
UL 60950-1

Emission Compliance
CE Mark Class A
FCC Part 15B Class A
VCCI Class A

+ Warranty

Length
Limited Lifetime

Details
www.etherwan.com/support/warranty-policy


+ What's Included

Device
Media Converter


Power
12VDC Power Adapter

Documentation
Quick Install Guide

Application

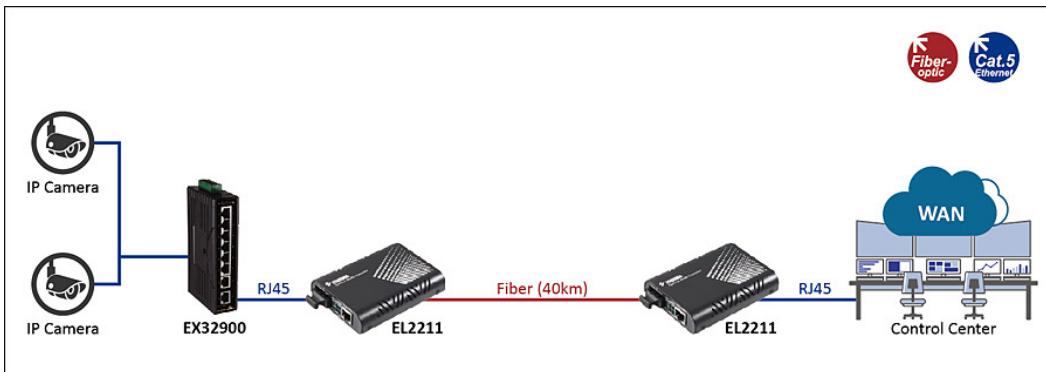

Dimensions

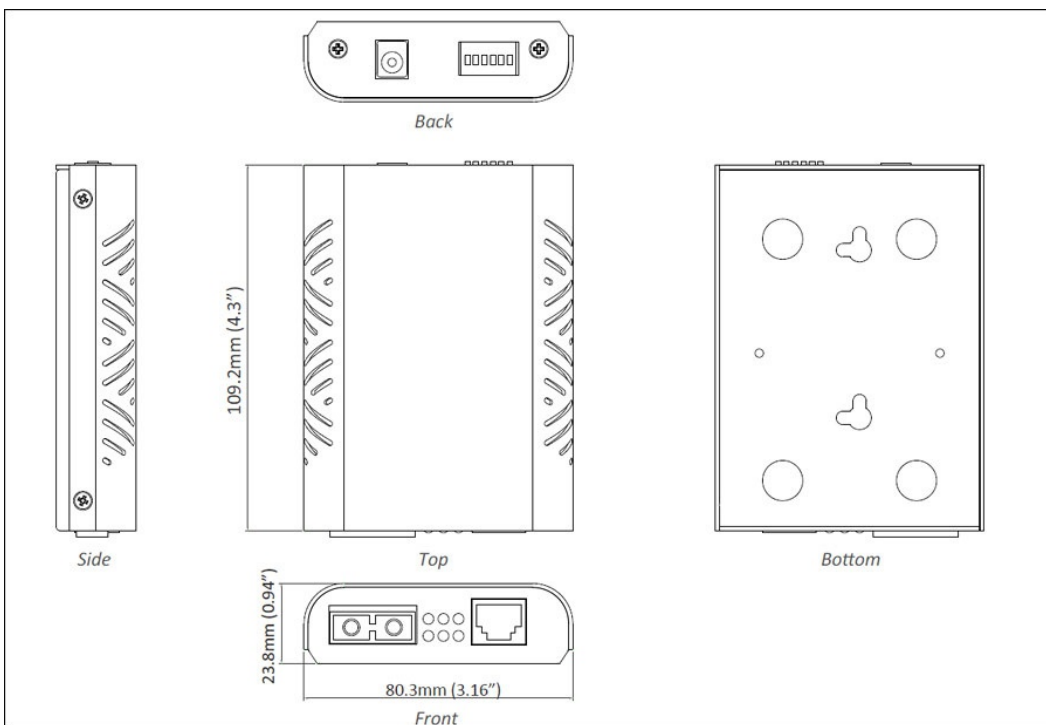

Ordering Info

+ Model

EL2211-X1Z 10/100/1000BASE-TX to 1000BASE-X Media Converter

Note: Shipment comes along with universal adapter; US (JP) /EU/UK plugs are included.

+ Gigabit Port Options (X)

3 1000BASE-SX (SC) - 550m (850nm)
4 1000BASE-SX (SC) - 2Km (1310nm)
5 1000BASE-SX (ST) - 550m (850nm)
A 1000BASE-LX (SC) - 10Km
B 1000BASE-LX (SC) - 20Km (1310nm)
E 1000BASE-LX (SC) - 40Km (1310nm)
R 1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
S 1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km

+ Power Adapter Options (Z)

A with external power adapter for AU
E with external power adapter for EU
J with external power adapter for JP
K with external power adapter for UK
U with external power adapter for USA
3C with external power adapter for China

+ Accessories

Multiple Channel Chassis www.etherwan.com/products/media-converters/multiple-channel-media-converters

